Ten Complete Programs Included

NO. 73

U.S. Edition: $2.50
International Edition: $3.00

JULY 1984

MICRO™

for the Serious Computerist

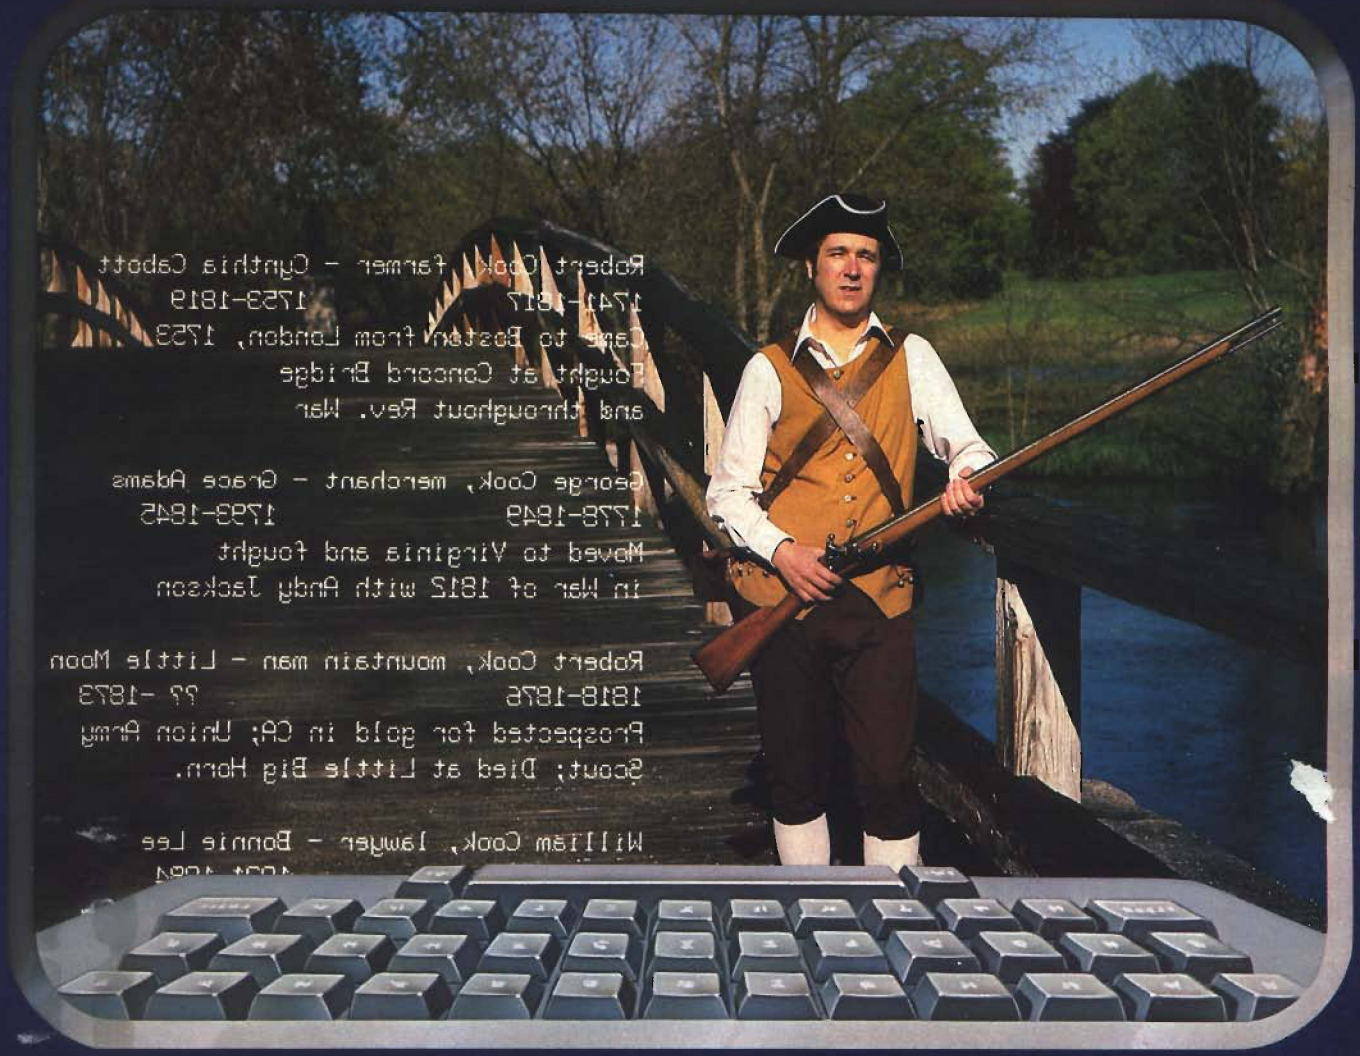

Basic DVORAK Keyboard
Applesoft Compression
Better BASIC Hex Loader
HiRes Graphic Printouts
6809/68000 Comparison
Flight Simulator II

0 74470 11690 0

It all adds up...

HOME COMPUTERS

ATARI®

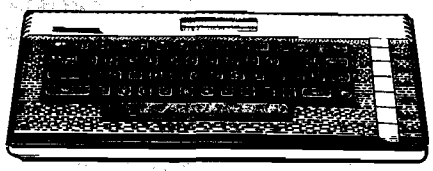

600XL $149
800XL $229
WHILE SUPPLY LASTS

850 Interface	$159.00	1200XL	CALL
1010 Recorder	$71.99	1450XL	CALL
1020 Color Printer	$219.00	CX30 Paddles	$11.99
1025 Dot Matrix Printer	$299.00	CX40 Joystick	$7.99
1027 Letter Quality Printer	$269.00	4011 Star Raiders	$31.99
1030 Direct Connect Modem	$99.99	4022 Pac Man	$31.99
1050 Disk Drive	$349.00	4025 Defender	$31.99
1064 Memory Module	$125.00	8026 Dig Dug	$31.99
Touch Tablet/Software	$64.99	8031 Donkey Kong	$35.99
Light Pen/Software	$72.99	8034 Pole Position	$37.99
CX22 Track Ball	$39.99	8040 Donkey Kong Jr	$33.99
7097 Atari Logo	$74.99	8043 Ms Pacman	$37.99
4018 Pilot (Home)	$57.99	8044 Joust	$37.99
405 Pilot (Educ.)	$99.99	8046 Pengo	$33.99
8036 Atari Pilot	$77.99	8052 Moon Patrol	$33.99
5049 VisiCalc	$149.99	4003 Assembler	$44.99
488 Communicator II	$119.99	8126 Microsoft Basic I or II	$64.99

DISK DRIVES FOR ATARI

PERCOM

AT 88-S1	$279.00
AT 88-S1 FD	$299.00

INDUS

GT Drive	$379.00

RANA

1000	$299.00

TRAK

AT-D2	$389.00
AT-D4	$589.00

MEMORY BOARDS

ATARI		APPLE/FRANKLIN	
Axlon 32K	$59.99	Axlon 128K	$299.00
Axlon 48K	$99.99	Axlon 320K	$849.00
Axlon 128K	$299.00		

ALIEN VOICE BOX

Alien	$119.00	Apple	$149.00

DISKETTES

MAXELL

5¼" MD-1	$24.99
5¼" MD-2	$34.99
8" FD-1	$39.99
8" FD-2	$49.99

ELEPHANT

5¼" SS/SD	$18.49
5¼" SS/DD	$21.99
5¼" DS/DD	$26.99

VERBATIM

5¼" SSDD ... Value Life	$22.99
5¼" DSDD ... Value Life	$29.99

3M

5¼" Disk Head Cleaner	$14.99

DISK HOLDERS

INNOVATIVE CONCEPTS

Flip-n-File 10	$3.99
Flip-n-File 50	$17.99
Flip-n-File 50 w/lock	$24.99
Flip-n-File (400/800 ROM)	$17.99

CONTROLLERS & JOYSTICKS

WICO

Joystick	$21.99
3-way Joystick	$22.99
Power Grip	$21.99
Bat Handle Joystick	$17.99
Atari/VIC Trak Ball	$34.99
Apple Trak Ball	$54.99
Apple Analog	$37.99

KRAFT

Joystick	$41.99
Atari Single Fire	$12.99
Atari Switch Hitter	$15.99
Apple Paddles	$34.99
IBM Paddles	$34.99
IBM Joystick	$46.99

Koala

Atari (ROM)	$79.99	IBM	$99.99
C-64 (ROM)	$79.99	Apple/Franklin	$85.99

PRINTERS

AXIOM

AT-100 Atari Interface Printer	$239.00
GP-100 Parallel Interface	$199.00
GP-550 Atari Bidirectional	$319.00
GP-700 Atari Color Printer	$489.00
GP-550 Parallel Printer	$269.00

BMC

401 Letter Quality	$589.00
BX-80 Dot Matrix	$269.00

C.ITOH

Gorilla Banana	$209.00
Prowriter 8510P	$379.00
Prowriter 1550P	$599.00
A10 (18 cps)	$569.00
Hot Dot Matrix	CALL
F10-40	$999.00
F10-55	$1349.00

COMREX

ComWriter II Letter Quality	$499.00

DIABLO

620 Letter Quality	$949.00
630 Letter Quality	$1749.00

DAISYWRITER

2000	$999.00
Tractor Feed	$109.00

EPSON

RX-80, RX-80FT, RX-100	CALL
FX-80, FX-100	CALL
LQ 1500	CALL

IDS

Prism 80...For Configuration	CALL
Prism 32...For Configuration	CALL

JUKI

6100	$499.00

MANNESMAN TALLY

160L	$589.00
180L	$799.00
Spirit 80	$309.00

NEC

8023 Dot Matrix	$389.00
8025 Dot Matrix	$669.00
2010/15/30	$749.00
3510/15/30	$1369.00
7710/15/30	$1799.00

OKIDATA

82, 83, 84, 92, 93, 2350, 2410	CALL

OLYMPIA

Compact 2	$479.00
Compact RO	$509.00
ESW 3000	$1449.00

SMITH CORONA

TP-1000	$449.00
Tractor Feed	$119.00

SILVER REED

500 Letter Quality	$449.00
550 Letter Quality	$549.00
770 Letter Quality	$899.00

STAR

Gemini 10X	$299.00
Gemini 15X	$399.00
Serial Board	$75.00
Radix 10	$599.00
Radix 15	$699.00

TOSHIBA

1340	$869.00
1351	$1699.00

TRANSTAR

120P	$469.00
130P	$649.00
315 Color	$459.00

MODEMS

ANCHOR

Volksmodem	$59.99
Mark IL Serial	$79.99
Mark VII (Auto Ans/Auto Dial)	$99.99
Mark XII (1200 Baud)	$299.99
Mark TRS-80	$99.99
9 Volt Power Supply	$9.99

HAYES

Smartmodem 300	$209.00
Smartmodem 1200	$499.00
Smartmodem 1200B	$449.00
Micromodem IIe	$269.00
Micromodem 100	$299.00
Smart Com II	$89.99
Chronograph	$199.00

NOVATION

J-Cat	$99.99
Cat	$139.00
Smart Cat 103	$179.00
Smart Cat 103/212	$399.00
AutoCat	$219.00
212 AutoCat	$549.00
Apple Cat II	$249.00
212 Apple Cat	$449.00
Apple Cat 212 Upgrade	$259.00
PC Cat Access 1 2 3	$399.00

ZENITH

ZT-1	$339.00
ZT-10	$309.00
ZT-11	$369.00

MONITORS

AMDEK

300 Green	$149.00
300 Amber	$159.00
310 Amber	$169.00
Color 1	$279.00
Color 1 Plus	$299.00
Color 2 Plus	$419.00
Color 3	$349.00
Color 4T IBM	$699.00

BMC

1201 (12" Green)	$88.99
1201 Plus (12" Green Hi-Res)	$98.99
9191 Plus	$249.00

GORILLA

12" Green	$88.99
12" Amber	$95.99

NEC

JB 1260 Green	$109.00
JB 1201 Green	$149.99
JB 1205 Amber	$159.99
JB 1215 Color	$259.00
JC 1216 RGB	$429.00
JC 1460 Color	$359.00

PRINCETON GRAPHICS

MAX-12 Amber	$199.00
HX-12 RGB	$539.00
SRT-2 RGB	$649.00

SAKATA

SC-100 Color	$269.00
SG-1000 Green	$129.00
SA-1000 Amber	$139.00

TAXAN

210 Color RGB	$299.00
400 Med-Res RGB	$319.00
415 Hi-Res RGB	$439.00
420 Hi-Res RGB (IBM)	$489.00
100 12" Green	$126.00
105 12" Amber	$135.00

USI

Pi 1, 9" Green	$99.99
Pi 2, 12" Green	$119.99
Pi 3, 12" Amber	$129.99
Pi 4, 9" Amber	$119.99
1400 Color	$269.99

QUADRAM

Quadchrome 8400 Color	$519.00

ZENITH

ZVM122 Amber	$99.99
ZVM123 Green	$89.99
ZVM124 IBM-Amber	$149.00
ZVM131 Color	$309.00
ZVM133 RGB	$429.00
ZVM135 RGB/Composite	$469.00

COMPUTER MAIL ORDER

west
VISA
800-648-3311
In NV call (702)588-5654, Dept. 125
Order Status Number: 588-5654
P.O.Box 6689
Stateline, NV 89449

canada
Ontario/Quebec 800-268-3974
Other Provinces800-268-4559
In Toronto call
(416)828-0866, Dept. 125
Order Status Number: 828-0866
2505 Dunwin Drive, Unit 3B
Mississauga, Ontario, Canada L5L1T1

east
800-233-8950
MasterCard
In PA call (717)327-9575, Dept. 125
Order Status Number: 327-9576
Customer Service Number: 327-1450
477 E. 3rd St., Williamsport, PA 17701

No risk, no deposit on C.O.D. orders and no waiting period for certified checks or money orders. Add 3% (minimum $5) shipping and handling on all orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. Call today for our catalog.

the best prices

APPLE/FRANKLIN DISK DRIVES

MICRO-SCI

A2	$219.00
A40	$299.00
A70	$319.00
C2 Controller	$79.99
C47 Controller	$89.99

RANA

Elite 1	$279.00
Elite 2	$389.00
Elite 3	$569.00

APPLE IIe STARTER PACK

64K Apple IIe, Disk Drive & Controller, 80 Column Card, Monitor II & DOS 3.3
COMPLETE.....CALL
Call on all other Apple Models

FRANKLIN



ACE 1000 Color Computer	CALL
ACE PRO PLUS System	CALL
ACE 1200 Office Mgmt. System	CALL
ACE PORTABLES	CALL

SANYO

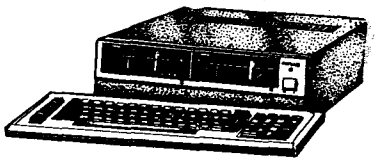

MBC 550	**CALL**
MBC 555	**CALL**
MBC 555-2	**CALL**
MBC 1100	$1499.00
MBC 1150	$1899.00
MBC 1200	$1849.00
MBC 1250	$2099.00
PR 5500 Printer	$599.00

HEWLETT PACKARD

HP 71B	**$419.99**
41CV	**$189.99**
41CX	**$249.99**
HP 11C	$82.99
HP 12C	$92.99
HP 15C	$92.99
HP 16C	$92.99
HP 75D	$879.99
HPIL Module	$98.99
HPIL Cassette or Printer	$359.99
Card Reader	$143.99
Extended Function Module	$63.99
Time Module	$63.99

SHARP



PC-1500A	**$165.99**
PC-1250A	**$88.99**
CE-125 Printer/Cassette	$128.99
CE-150 Color Printer/Cassette	$171.99
CE-155 8K RAM	$93.99
CE-161 16K RAM	$134.99

NEC

NEC

PC-8221A Thermal Printer	$149.99
PC-8281A Data Recorder	$99.99
PC-8201-06 8K RAM Chips	$106.00
PC-8206A 32K RAM Cartridge	$328.00

commodore

CBM 8032	**$599**
CBM 8096	$869.00
CBM 9000	$999.00
B128-80	$769.00
8032 to 9000 Upgrade	$499.00
2031 LP Disk Drive	$299.00
8050 Disk Drive	$949.00
8250 Disk Drive	$1199.00
4023 Printer	$379.00
8023 Printer	$569.00
6400 Printer	$1399.00
Z-RAM	$499.00
Silicon Office	$699.00
The Manager	$199.00
SoftROM	$125.00
VisiCalc	$159.00

PROFESSIONAL SOFTWARE

Word Pro 2 Plus	$159.00
Word Pro 3 Plus	$189.00
Word Pro 4 Plus/5 Pluseach	$279.00
InfoPro	$179.00
Administrator	$399.00
Power	$79.99

SX-64 Portable	**$839**
CBM 64	**$199**
C1541 Disk Drive	$249.00
C1530 Datasette	$69.99
C1520 Color Printer/Plotter	$129.00
M-801 Dot Matrix Printer	$219.00
C1526 Dot Matrix/Serial	$299.00
C1702 Color Monitor	$259.00
C1311 Joystick	$4.99
C1312 Paddles	$11.99
C1600 VIC Modem	$59.99
C1650 Auto Mdoem	$89.99
Logo 64	$49.99
Pilot 64	$39.99
Word Pro 64 Plus	$59.99
Calc Result 64	$65.99
Calc Result Easy	$39.99
Codewriter 64	$75.99
MCS 801 Color Printer	$499.00
DPS 1101 Daisy Printer	$459.00
Magic Voice Speech Module	$54.99
Desk Organizer Lock	$49.99
Vidtex Telecommunications	$34.95

MSD

SD1 Disk Drive	$349.00
SD2 Disk Drive	$599.00

NEC PRINTERS

NEC 2050	$899.00
NEC 3550	$1669.00

PERCOM/TANDON DISK DRIVES

5¼" 320K Floppy	$219.00
5 Meg Hard w/Controller	$1049.00
10 Meg Hard w/Controller	$1349.00
20 Meg Hard w/Controller	$1899.00

VISICORP

VisiCalc IV	$159.00
VisiWord +	$249.00
Visi-on Application Manager	$79.99
Visi-on Calc	$269.00
Visi-on Graph	$179.00
Visi-on Word	$249.99
Optical Mouse	$189.99

AST RESEARCH

Six Pak Plus	from...$279.00
Combo Plus II	from...$279.00
Mega Plus	from...$309.00
I/O Plus	from...$139.00

QUADRAM

Quadlink	$479.00
Quadboard	as low as...$289.00
Quad 512 Plus	as low as...$249.00
Quadcolor	as low as...$219.00
Chronograph	$89.99
Parallel Interface Board	$89.99
64K RAM Chips Kit	$59.99

IBM

MICROPRO

WordStar Professional Pack	$389.00
InfoStar	$299.00
SpellStar	$159.00
CalcStar	$99.99

MICROSTUF

Crosstalk	$105.00

MICROSOFT

MultiPlan	$159.00

ASHTON-TATE

dBASE II	$339.00
dBASE III	$449.00
Friday!	$185.00

IUS

EasyWriter II	$249.00
EasySpeller	$119.00
EasyFiler	$229.00

CONTINENTAL SOFTWARE

1st Class Mail/Form Letter	$79.99
Home Accountant Plus	$88.99

LOTUS

Symphony	$549.00
1-2-3	$339.00

PROFESSIONAL SOFTWARE

PC Plus/The Boss	$329.00

SYNAPSE

File Manager	$89.99

ZENITH data systems

PC COMPATIBLE 16 BIT SYSTEMS

Z-150 PC Z-160 PC

Call for price and configurations

SOFTWARE

	C-64	Atari	IBM	Apple
Electronic Arts				
One on One	$29.99	$29.99	$29.99	$29.99
Music Construction	$29.99	$29.99	$29.99	$29.99
Pinball Construction	$29.99	$29.99	$29.99	$29.99
Cut & Paste	$39.99	$39.99	$39.99	$39.99
Hard Hat Mack	$27.99	$27.99	$27.99	$27.99
InfoCom				
Witness	$29.99	$29.99	$29.99	$29.99
Infidel	$29.99	$29.99	$29.99	$29.99
Deadline	$29.99	$29.99	$29.99	$29.99
Planetfall	$29.99	$29.99	$29.99	$29.99
Enchanter	$29.99	$29.99	$29.99	$29.99
Zork I, 2, 3 ea	$27.99	$27.99	$27.99	$27.99
Suspended	$29.99	$29.99	$29.99	$29.99
Sorcerer	$29.99	$29.99	$29.99	$29.99
AtariSoft				
Joust	$35.99	N/A	$28.99	$28.99
Moon Patrol	$35.99	N/A	$28.99	$28.99
Ms. PacMan	$35.99	N/A	$28.99	$28.99
PacMan	$35.99	N/A	$28.99	$28.99
Donkey Kong	$35.99	N/A	$28.99	$28.99
Pole Position	$35.99	N/A	$28.99	$28.99
Splinaker				
Aerobics	$26.99	$26.99	$26.99	$26.99
Trans	$24.99	$24.99	$24.99	$24.99
Adventure Creature	$24.99	$24.99	$24.99	$24.99
Aegean Voyage	$24.99	$24.99	$24.99	$24.99
Snooper Troops 1,2 ea	$28.99	$28.99	$28.99	$28.99
Traction Fever	$22.99	$22.99	$22.99	$22.99
Alphabet Zoo	$22.99	$22.99	$22.99	$22.99
In Search of..	$24.99	$24.99	$24.99	$24.99
Facemaker	$22.99	$22.99	$22.99	$22.99
Kinder Comp	$17.99	$17.99	$17.99	$17.99
Dynatech				
Code Writer	$79.99	$79.99	$175.99	$155.99
VisiCorp				
VisiCalc	$159.99	$143.99	$159.99	$159.99
VisiCalc Advanced	N/A	N/A	N/A	$269.99
pfs:				
Write	N/A	N/A	$89.99	$89.99
Graph	N/A	N/A	$89.99	$79.99
Report	N/A	N/A	$79.99	$79.99
File	N/A	N/A	$89.99	$79.99
Solutions:* as low as	N/A	N/A	$16.99	$16.99

*Call on Titles

COMPUTER MAIL ORDER

west

800-648-3311

In NV call (702)588-5654, Dept. 125
Order Status Number: 588-5654
P.O.Box 6689
Stateline, NV 89449

canada

Ontario/Quebec 800-268-3974
Other Provinces800-268-4559
In Toronto call
(416)828-0866, Dept. 125
Order Status Number: 828-0866
2505 Dunwin Drive, Unit 3B
Mississauga, Ontario, Canada L5L1T1

east

800-233-8950

In PA call (717)327-9575, Dept. 125
Order Status Number: 327-9576
Customer Service Number: 327-1450
477 E. 3rd St., Williamsport, PA 17701

VISA MasterCard

CANADIAN ORDERS: All prices are subject to shipping, tax and currency fluctuations. Call for exact pricing in Canada. INTERNATIONAL ORDERS: All orders placed with U.S. offices for delivery outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum $5) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available to qualified Educational Institutions. APO & FPO: Add 3% (minimum $5) shipping and handling.

This Month in Micro

This month we have 10 complete, useful, exciting programs for you on a diverse group of topics. The longer ones are available on MicroDisk as well to save you time and effort.

Featured This Month

DVORAK Keyboard — Try out a new keyboard arrangement that can increase your typing speed dramatically. The keyboard now commonly used on computers was deliberately designed to avoid jamming slow typewriter keyboards. Technology eliminated the problem, but the awkward solution is still with us. However, a different layout is becoming more widely accepted, which results in productivity and typing speed skyrocketing. This demo program will allow you to convert your keyboard temporarily and see if you like the arrangement.

6809 vs. 68000 — While the 68000 based computer is far more expensive than the 6809, it can be 100 times more powerful, but, what are the real differences. A checkbook offers a good way to compare their abilities. This program contains the main subroutines to create a machine language program which runs on either kind of machine to allow comparison.

Flight Simulator II — Studying an accepted masterpiece of program design is one way to learn really fine programming skills. Flight Simulator II is just such an exciting state-of-the-art package. Looking into its details and the way it was created will give even experienced programmers more than a few pointers.

C-64 Graphics Dump — This "perfect" dump for the impressive C64 graphics works in either HiRes or multi-color mode, allows large size printouts, works with many printers and graphics packages, can vary color and intensity, and is very fast. This program is available on a MicroDisk.

Communication Between Computers — What do you do when you have several different computers and only one printer? Interface and merge it all into one efficient system.

HILISTER — Highlighting lines of text and programs can be very useful for emphasis or clarity when discussing material on the screen in business meetings, classrooms, seminars. This program also allows easy movement within a program or text.

Simple Numeric Sorting — This simple method lets long lists be arranged in order, without user supplied programs. It takes advantage of a built-in BASIC feature.

Applesoft Compression Program — With other programs, extra long listings often do not work, overflowing the Called Line Number Table. This program has several unusual features which surpass other Compression routines.

Useful Math Functions — Save time and mathematical aggrevation with a compilation of defined functions.

Commodore to Apple — Sort of a poor man's modem. Commodore cassette files can be sent to Apple disks for storage or interfacing with peripherals which don't work with Commodore. This works with data files, BASIC programs and memory ranges.

Circles for the C64 — In a HiRes environment, creating circles can be a problem. The code for this mathematical way of defining and plotting circles in a game or business type analysis is most helpful. The theory will generally work on any 6502 based computer with HiRes capabilities.

BASIC Hex Loader — This handy BASIC Utility will load Machine Language code in Hex, and a special version for the C64 will even generate the DATA statements.

MORE THAN JUST THE TIP

subscribe! to

The Transactor

the Tech/News Journal For Commodore Computers

...AND GET MORE FROM YOUR COMMODORE 64 AND VIC 20

"The Transactor is a ... constant resource." JIM BUTTERFIELD

"The Material is fabulous ... of the Transactor. Very impressive." ... the friend ... -LIZ

CHECK THESE FEATURES:

- Up-to-date: new ... and services.
- Insights and stra... talk ... respected exper... ke Jim Butterfield.
- Interesting bits o... to shar... among Commod... users.

SIMPLY THE BEST

Subscribe now a... you'll wonder how yo... anaged without it.

THE TRANSACTOR SUBSC... S DEPT
500 Steeles Avenue, Milton, C... 9T 3P7
Telephone: 876-4741
Year's subscription (6 issues) $1... 0
(Separate issues $2.95 each)
Back issues available.

Publisher/Editor-In-Chief
Robert M. Tripp

Associate Publisher
Cindy Kocher

Production Manager
Jennifer Collins

Technical Editor
Mark S. Morano

Technical Editor
Mike Rowe

Advertising Manager
William G. York

Dealer Sales Manager
Linda Hensdill

Circulation Manager
Linda Hensdill

Office Manager
Pauline Giard

Shipping Director
Marie Ann LeClair

Comptroller
Donna M. Tripp

Accounting
Louise Ryan

Contributing Editors
Cornelis Bongers
Phil Daley
David Malmberg
John Steiner
Jim Strasma
Paul Swanson
Richard C. Vile, Jr.
Loren Wright

MICRO is published monthly by:
MICRO, Chelmsford, MA 01824.
Second Class postage paid at:
Chelmsford, MA 01824 and additional mailing offices.
USPS Publication Number: 483470.
ISSN: 0271-9002.
Send subscriptions, change of address, USPS Form 3579, requests for back issues and all othe fulfillment questions to:
MICRO
P.O.Box 6502
Chelmsford, MA 01824
or call 617/256-3649.
Subscription Rates: (per year):
U.S. $24.00 or $42.00 for two years
Foreign surface mail: $27.00
Air mail: Europe $42.00
Mexico, Central America, Middle East, North Africa, Central Africa $48.00
South America, South Africa, Far East, Australia, New Zealand $72.00

Copyright © 1984 by MICRO.
All Rights Reserved.

MICRO™

for the Serious Computerist

JULY 1984

13 A Basic DVORAK Keyboard for the VIC-20 and C-64
Alfred J. Bruey
A "new" key arrangement is gaining acceptance, increasing typing speed and productivity enormously.

15 A Comparison of 6809 and 68000
Mike Rosing
The checkbook offers a simple, effective way to compare these two microprocessors.

19 Flight Simulator II: Microcomputer Simulation At Its Best
Chris Williams
By analyzing this design masterpiece, programmers may discover the elements needed to make their own software great.

22 Graphic Print for C-64
Michael J. Keryan
Create a full-page graphic printout from a Commodore 64 high resolution display.

30 Interface Clinic: Communication Between Different Computers
Ralph Tenny
Merge several computers into one efficient system, sharing a single printer.

34 HILISTER — A Study and Teaching Aid
J. Morris Prosser
Move easily within your programs and highlight parts of text or listings for emphasis, drama, clarity.

38 Super Simple Numeric Sort
Robert L. Martin
Arrange a list in numerical order without the need for a user supplied sorting program.

NO. 73

42 CMPRSS: Improved Applesoft Compression Program
Ian R. Humphreys
Compress large programs and retain comments without overflowing Called Line Number Table.

52 Useful Functions — Part II
Paul Garrison
Save time and mathematical aggrevation with a compilation of defined functions.

55 Commodore-To-Apple Cassette File Loader
Art Matheny
Transfer cassette files written on VIC-20 or C64 to an Apple disk for interfacing, etc.

65 BASIC Hex Loader
Robert M. Tripp
Handy BASIC utility to load Machine Language code in Hex.

66 Circles for the Commodore 64
Lester Cain
An interesting mathematical way to plot circles on the C64.

Product Reviews

11 Paint Magic — Easy to use graphics with joystick and keyboard.

11 TimeTrax — Time management system for personal or business life, including printed schedules.

11 Promenade Model C1 EPROM Programmer — Add-on programmer which handles 12 models of EPROM and at least 8 of EEPROM.

12 Spell Perfect — Machine language spelling checker for Letter Perfect or any standard text files.

12 The Complete Graphics System — 2 and 3 dimensional graphics including 108 colors.

Departments

2 Highlights
6 Editorial
7 Feedback
8 Spotlight: Sage
10 Lyte Bytes
11 Reviews
72 CoCo Bits
73 Microbes
74 Catalog
78 Books
79 Listing Conventions
80 Advertiser Index
80 Next Month in Micro

editorial

Dear Readers,

As we approach the midpoint of 1984, I find myself looking towards the future. In the field of computers so much happens so quickly that it is hard to imagine what will transpire in the remainder of this year, let alone five years hence. One way to approach the future is by examining the present, noting the trends and then projecting. At this time the world of the microcomputer continues to dish up new surprises. It seems every time you turn around a new computer is being launched. Although the appearance may differ from machine to machine they are all based on a few standard chips. At its inception, MICRO chose to focus on the 6502 chip. This chip has proven itself to be a well designed and dependable innovation. Although the heyday of the 6502 has passed, it is not dead. This is clearly evidenced by Apple releasing yet another 6502-based computer - the Apple IIc. Apple seems to also be aware of the need to move onward and did so with the introduction of the Macintosh. The 68000 brings the general populace in touch with 16-bit machines. (I will not go into the advantages of a 16-bit over an 8-bit because, if there weren't any, the 68000 would never have surfaced.) Presently the big name in chips seems to be Intel, not Motorola. The 8088, 8086 and other chips developed by Intel have become the backbones of micros made by IBM, Hewlett-Packard, and Digital, to name a few. These are not names to scoff at. As popular as 6502 based machines (Apple, Atari, Commodore, etc.) are, the bulk of sales is starting to shift to machines based on other chips. Unfortunately or fortunately, depending on your viewpoint, there are rumors that Intel is only going to be able to fill 25 percent of its orders. If this proves to be true then someone will have to pick up the slack. The question is who. Perhaps Motorola will seize the opportunity and cover the deficit, using their chips.

But, even if Intel completely dominates the market, the 6502 will carry on. People don't throw away computers because they become outdated. The fact that there are still many IBM mainframes using cards is a testimony to this. Why do people continue to use outdated computers? Certainly the monetary aspect can't be overlooked. Even with drastic reductions in the price of memory (the new HP Nomad has as many words of memory as the old IBM 360 series), and the lowering of the price of computers in general, they are still not cheap. For many it is a matter of loyalty. Others are content with the familiar and prefer the comfort of an old friend to the fear of the unknown. And there are those people who prefer to live in the past, not be bothered and are perfectly content, thank you very much. For these and other reasons there will be a need for 6502 machines, journals, software and support for many years to come.

But what about the future? Certainly one cannot ignore the 68000 or Intel's 80186. To pretend they aren't improvements on previous chips is folly. Rather than seek to delude ourselves I suggest we embrace new technology with open arms and open eyes. To blindly accept something simply because it has been billed as new and improved is foolish. I think the best approach is one of open skepticism. A willingness to explore new territory and seek new frontiers. After all, isn't that what the world of computers has always been about? Let's examine the innovations and carefully separate the wheat from the chaff. Bearing in mind past mistakes, we will always find room to improve and go forward. We have built better mousetraps; we have even built better "mouses"; why not now create men? Because, of mice and men, there is no end.

Mark S. Morano

Mark S. Morano
Technical Editor

On The Cover

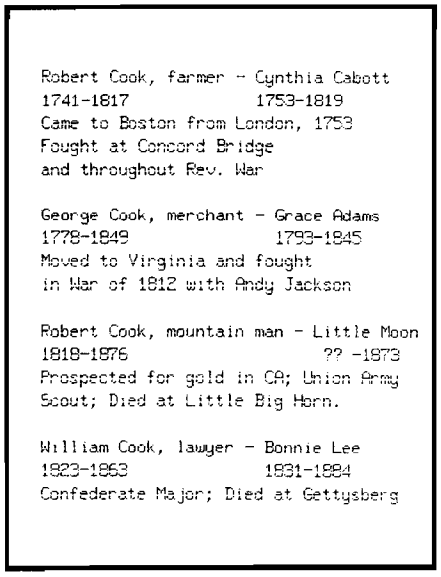
Robert Cook, farmer - Cynthia Cabott
1741-1817 1753-1819
Came to Boston from London, 1753
Fought at Concord Bridge
and throughout Rev. War
George Cook, merchant - Grace Adams
1778-1849 1793-1845
Moved to Virginia and fought
in War of 1812 with Andy Jackson
Robert Cook, mountain man - Little Moon
1818-1876 ?? -1873
Prospected for gold in CA; Union Army
Scout; Died at Little Big Horn.
William Cook, lawyer - Bonnie Lee
1823-1863 1831-1884
Confederate Major; Died at Gettysberg

On the bridge at Concord, Massachusetts, a colonial minuteman dreams of past and future glories of family and country. Data Bases, long thought of as tools for business and government, have many useful applications in personal life as well. Keeping family trees, health information, employment records are just a few uses which can make you paper-independent. Happy Independence Day!

feedback

Dear Ian,

(RE: Micro 67, Dec. 1983)

I have a question about your program 'C-64 Alarm Clock'. For some unknown reason, when I use 'GOSUB 9140' to reset the alarm, the computer displays 'SYNTAX ERROR IN 48'. It does not affect the operation of the clock, but I would like to know why this statement appears, since there is no statement 48 in this program. I have tried to list statement 48, however, nothing lists. Please reply as soon as possible. Thank you.

Kenneth K. Choy
San Francisco, CA

Dear Kenneth,

The situation you describe, getting a 'syntax error' after 'gosub 9140', seems to occur only occasionally. The simplest explanation is that the GOSUB command is intended to be used from within a program. If you type it into the keyboard directly, then BASIC will execute the subroutine ok. When it is finished, however, it will try to resume executing the program at the next statement after the GOSUB. Since there is no program running, it gets confused and gives an error message.

The error seems to be quite harmless, and does not affect anything. If you use the 'gosub 9140' statement within a program, you should not incur an error.

There is no line 48, of course, and that number is meaningless.

I hope you enjoy the alarm clock program, Kenneth, and that this odd error doesn't cause any problems.

Ian Adam
Vancouver, BC, Canada

To the editor,

Ref. Micro No.51 August 1982, page 97.

First things first. I truly enjoy your magazine. Similarly for Mr. Bongers articles.

In Mr. C. Bongers program on an improved method of garbage collection, MICRO No. 51 page 90, the program works as advertised. However, I found a slight problem when I attempted to use it with string arrays. The second paragraph on page 97 appears to be too brief. I tried using the string version of:

&CLEAR A:DIM A(20,20)

to initialize a string array to zero. This version:

&CLEAR A$:DIM A$(20,20)

didn't do anything until it was modified to force a cleanup as follows:

&CLEAR A$:FRE (1,K) : DIM A$(20,20)

From then on I was smiling.

James Fulton
Corona Del Mar, CA

MICRO™

MICRO

One Month Added to All Subscriptions

Because of our combined April/May issue, we've gotten some questions from readers wanting to know if we were going to be bimonthly, if they were going to loose an issue, if we were taking a vacation early, etc.

The answer is much simpler. When we redesigned MICRO to make it more readable,we needed some extra time between issues to gear up our production department (artistic temperament and all that). So we gained the needed time by combining two issues.

It was a one-time thing. We are not going to be bimonthly. More importantly, you will not lose an issue. If you subscribed for 12 issues, you will receive just that — and the combined issue counts as only one. All subscriptions will be extended one month.

While we're on the subject of subscriptions, please check your mailing labels to be sure all information is correct; tell us about problems right away.

At last!...A dual 6522 versatile interface adapter (VIA) board for the Commodore-64.

The 6522 VIA, long the preferred input/output chip for 6502 microcomputers, is now available for the C-64. 6522 programming techniques, covered in many available books, can now be applied to the C-64 for even the most sophisticated real-time control applications. Board allows full use of the IRQ interrupt. When combined with the C-64's memory capacity, it provides an extremely powerful yet cost-effective development system and controller in one package. Includes extensive application notes and programming examples.

Up to four boards can be connected together, providing sixteen 8-bit ports. Order Model 64IF22, $169 for one, postpaid USA. Each additional $149.

Complete reconstructed Assembly Language source code for the C-64's BASIC and KERNAL ROMs, all 16 K!

Extensively commented and cross-referenced. Far more than a mere "memory map" of useful locations, this book really does tell all. An incredible time-saver in effective C-64 programming and understanding. Order C-64 Source $29.95, postpaid USA.

SCHNEDLER SYSTEMS
1501 N. Ivanhoe, Dept. M7
Arlington, VA 22205
Telephone orders/information: (703) 237-4796
VISA **MASTERCARD**

Sage Microcomputer System

Distributor

Sage Computer
4905 Energy Way
Reno, NV 89502

Introduction

The SAGE II is a fast 32-bit computer using the p-System Operating System with a 68000 Interpreter to emulate the 'p-machine.' SAGE chose this operating system for a number of reasons. To develop their own Operating System would have been time consuming and costly, and once it was finished they would be incompatible with everyone else. Instead they opted for a highly portable system which would allow programs to be transferred from one machine to another with very little difficulty. Portability being the key, many programmers purchased SAGEs to use as developmental tools. The SAGE also had the added attraction of being very fast. With these points in mind, the majority of the SAGEs sold during the first year were bought by programmers and developers. Since that time the market and support of the SAGE has greatly expanded.

The Processor

The SAGE II uses an 8mhz, interrupt driven 68000 microprocessor. It has a 16-bit data bus and a 24-bit address bus, directly addressing 16 million bytes. There are more than 1000 executable instructions, the set containing 56 instruction types with 14 different addressing modes. With 17 general purpose registers, each 32 bits long, a 24-bit program counter and a 16-bit status register, the SAGE is a powerful machine. Using an 8 Mhz clock the MC68000 (without wait states) runs at 2 million instructions per second. There is a light on the processor which indicates when the bus is active, inactive or the processor is in process.

Memory

RAM memory for the SAGE II is configurable from 128K to 1024K bytes in 128K increments. On the Main processor board (CPU board) up to 512K bytes may be stored, with an additional 512K on the Winchester board. A self-test, DEBUGGER, and bootstraps are in the EPROM firmware.

Keyboard and Physical Description

Basically a standard Qwerty keyboard, the entire unit is connected with a telephone-like cord allowing the user to move the keyboard to his lap or any convenient position. The basic alphanumeric keys are laid out in the usual manner with a numeric pad to the right. Above this pad are four programmable function keys (their function changing from program to program). The SAGE II is contained in an aluminum case measuring 3.5" x 12.5" x 17". Weighing in at 15lb. 8 oz., it is easily moved.

Interfaces

SAGE decided to simplify I/O implementation by using I/O memory-mapped assignment. The connections provided are: Terminal - RS232-C, Modem - RS232-C, Printer - parallel, Group-A and B - dipswitch, and IEEE-488 -GPIB bus. A second RS232-C port is available. With the Winchester board 4 serial ports can be supported.

Documentation

The documentation we received included a Getting Started/Word Processing volume, a Technical Manual, and a p-System Operating System Manual. Each manual

was contained in a 3-ring hard-cover binder which fit into another hard-covered box. The documentation was clearly written, with indexes and table of contents that were very helpful. Most of the information was easily accessed and references were provided where appropriate.

Software

There are some fine software packages available for the SAGE II. These include some excellent business,spread-sheet and database products. As the SAGE II uses the p-System Operating System, it lends itself to easy transferral of software developed on other p-System machines. Given this portability of programs, I would expect a steady influx of software for this microcomputer.

Peripherals

The SAGE II supports single and dual disk drives, Winchester disk, dot matrix and daisy-wheel printers, monochrome and color monitors. The system came with a QUME monitor which is ergonomically designed (i.e., takes people into consideration). This was a very nice addition, being able to rotate and swivel the screen to avoid glare, and position the monitor to suit the user's preferences and body (tall, short, etc.).

Price

The SAGE II with one 640K floppy drive is listed at $3,200, with two 640K floppy drives it is listed at $3,900. If you choose to expand to 512K bytes of parity RAM (which is necessary for either the Sage Multi-User system or the Idris Operating System), it is an additional $500. The Qume CRT comes in a variety of flavors, prices ranging from $690 for the green QVT-102 to $1,310 for the amber QVT-211GX which has full graphics capabilities.

Conclusion

The SAGE II is a well designed and competent computer. SAGE is the only low-cost multi-user (2 users) and multi-tasking micro on the market. Allowing foreground and background activites to run concurrently, you can compile while using the word processor. Although this not the micro for everyone it is definitely one of the best 68000 micros currently available. For those who are interested in a more serious micro, particularly for developmental or business purposes this is definitely a machine worth considering.

MICRO

OS9
APPLICATION SOFTWARE

ACCOUNTS PAYABLE $299
GENERAL LEDGER with CASH JOURNAL $399
PAYROLL $499
ACCOUNTS RECEIVABLE $299
SMALL BUSINESS INVENTORY $299

COMPLETE DOCUMENTATION $19.95

OS9 & BASIC 09 ARE TRADEMARK OF MICROWARE, INC. & MOTOROLA CORP.

SPECIALTY ELECTRONICS

(405) 233-5564
2110 W. WILLOW – ENID, OK 73701

ISOBAR... most complete computer protection!

More features to prevent errors, false printout, disc skips! *Only ISOBAR has 3-way spike protection, noise suppression for RFI PLUS isolated filter banks!* Individual filter banks isolate each load from other loads minimizing data errors of *any* kind. MOV surge suppressors arrest both common mode and differential mode surges. L/C filter network rejects radio frequency noise at any amplitude. Torroidal coils for greatest efficiency! All-metal housing.

Order toll free 1-800-662-5021 IN ILLINOIS, CALL 1-312-642-6871

Indus-Tool, 325 W. Huron, Dept. M
Chicago, IL 60610
Send model #_____
Enclosed is $ _____ or charge on
☐ MasterCard or ☐ Visa Expires _____
Card no. _____
Name _____
Signature _____
Address _____
City _____ State ____ Zip ____

Model IBAR 4-6 (4 outlets, 6 ft. cord) Only $79.95

Model IBAR 2-6 (2 outlets, 6 ft. cord) Only $54.95

Model IBAR 8-15 (8 outlets, 15 ft. cord) Only $97.95

lyte bytes

Why Winchester failed his computer course?

_ _ _ _ _ _ _/_ _/_ _ _ _/_ _ _/_ _ _ _ _.

NCEMMUOIN

LXEPI

VICRSEURE

RPHEOP

EDPCOUESOD

GRMIOTLAH

CIKDOLRG

CAUPDETIL

ITUNENOMLITOEMCAC

RIBYAN

ILECDHAMXIE

CBYISOML

Last month we printed a puzzle, (see copy). The secret is now revealed -read the slashes and circles as ones and zeros, divide them into groups of seven, translate each group into its ASCII equivalent, then read the letters in reverse order; you get the following message -"welcome to lyte bytes."

This month to text your computer literacy we have a word scramble. To find the answer — first decipher each word and write it in the adjacent box; extract the letters that fall within the circles; take these letters and unscramble them to arrive at the final answer using the blank lines under the cartoon. We will of course provide the answer in next month's Lyte Bytes.

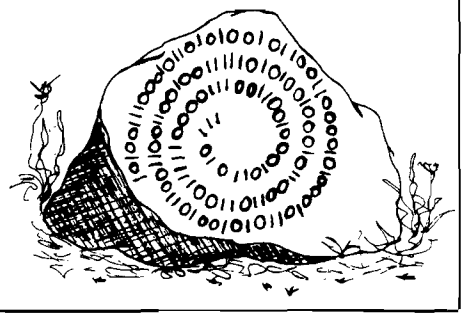

Product Name: **Paint Magic**
Equip. Req'd: Commodore 64 with disk drive, joystick and color monitor
Price: $50
Manufacturer: Datamost, Inc.
8943 Fullbright Avenue
Chatsworth, CA 91311

Description: A graphics program that creates pictures with the help of a joystick and the keyboard. You advance from circles and boxes with one color fills, to sketches with self-designed color patterns which can be transposed, exchanged and saved for later recall. Portions of the screen can be magnified for detailed work. Sample pictures are provided to show you what Paint Magic is capable of.

Pluses: Any screens you design can be saved and included in your own BASIC programs. Because of the numerous color and pattern choices you have amazing flexibility to experiment with.

Minuses: Only five colors can be used at a time. A joystick with eight positions is essential and being able to select diagonal lockout is a very useful feature.

Documentation: An attractive and simple tutorial provides the needed information

Skill level: Beginner and up

Reviewer: Mike Cherry

Product Name: **Time-Trax**
Equip. Req'd: Apple II, II or IIe, monitor (preferably Black and White), disk drive, blank diskette, 2 AA alakaline batteries
Price: $99.95
Manufacturer: Creative Peripherals Unlimited, Inc.
1606 S. Clementine
Anaheim, CA 92802

Description: An easy to use time management system, designed to help you keep track of events, scheduled meetings, etc., in your personal or business environment. One package can manage an infinite number of users. The program keeps a calendar of scheduled events for one year, and enables the user to print out a daily, weekly, or monthly schedule. It has a search of entries option, using keyword(s) and wildcards.

Pluses: Very simple to use, clean, clear and helpful menus. Hitting an escape (at most three times) will return you from anywhere in program to the main menu. Will not allow you to make an entry into the past. Has two kinds of cursors: blinking — displayed when you are to type information in; and non-blinking — displayed when you are to select an option. Retains data for the present month, and eleven months past and in the future, deleting any month that becomes 12 months old. Maximum of 311 entries per month or 9079 characters of text. Maximum of 99 entries per day. Good error messages. A clock is included (hardware and assembly instructions). This maintains the correct time and date, using two AA batteries as a backup. The clock itself makes this package worth the price. The clock can also be used in Applesoft BASIC or 6502 assembly language programs, a machine language program is included on the disk. Clear readable graphic display of calendar (month at a time).

Minuses: Time-Trax has a feature which reminds you of upcoming appointments and tells you when you have missed a scheduled event. A great idea, but one that is limited by the necessities of 1) your computer must be on, 2) it must be running Time-Trax, and 3) a menu or calendar must be displayed. If you haven't met these requirements your reminder becomes a missed event. Not very practical in practice, since most people will not choose to keep their computer always running and tie up their system with one program, i.e., Time-Trax. Rather, I suggest they should have made this a background instead of a foreground task.

Documentation: Thorough, easy to understand. Unlike much documentation, an index has been provided.

Skill level: Beginner and up.

Reviewer: Mark S. Morano

Product Name: **Promenade model C1 EPROM Programmer**
Equip. Req'd: Commodore 64 or VIC-20 Computer, Disk or Tape
Price: $99.50 plus $3 postage/handling
Manufacturer: JASON-RANHEIM
580 Parrott Street
San Jose, CA 95112

Description: The Promenade is a highly capable EPROM programmer which operates from the User Port of the VIC or C-64 computers. It can program at least 12 models of 5-volt only EPROM (Erasable Programmable Read Only Memory) ranging in size from 1K x 8 to 32K x 8 and 8 models of EEPROM (Electrically Erasable PROM). In addition to programming EPROMs and EEPROMs (and erasing EEPROMs) the unit will save assembly language object code (as will any programmer) and also will put BASIC object code into ROM. An auto-start loader is furnished which can make any ROM auto-start when plugged into the computer's expansion port. Promenade's own software will put several BASIC programs on an EPROM, along with a directory of those programs. Thus, working programs can be "cast in silicon" on EPROM and simply plugged in to change job assignments for a computer. This feature is being widely used in industry where the low cost of a VIC-20 makes it attractive to

dedicate a computer. The ease of BASIC programming and subsequent installation of the program in EPROM, allows major cost savings for computerized projects. Rapid turnaround of modified programs is possible with EEPROMs: the time for erasure and reprogramming an EEPROM can be as short as 2 minutes or less!

Pluses: This package outperforms most other add-on programmers, yet the cost is lower than any I've heard of. If you have the computer, all you need is mass storage, a Promenade and EPROMs to start generating programs which don't go away if the power fails. It is rugged, attractive, highly engineered and well made. Their immediate concern is to get the customer's problems solved as promptly as possible, even if this requires express mail delivery of a replacement unit.

Minuses: The major lack of this equipment is in documentation for programming EPROMs with assembly object code, and on how to manipulate assembly files with a debug monitor co-resident with the Promenade software. Everything works well together - it is just hard to learn how from the documentation. It is my personal prejudice that electrical schematics should be furnished with all electronic products, but the low cost of Promenade overcomes this feeling somewhat.

Documentation: A 16 page manual (but no schematic) is furnished. It covers saving BASIC programs to EPROM in meticulous detail. The manual is not well organized, but it is small enough that everything can be found rather easily. Documentation regarding use of Promenade for "normal" assembly-language programming is very sparse.

Skill level: In general, using EPROM programmers requires considerable knowledge about preparing assembly code for use in a read-only environment. However, this combination of equipment and documentation should allow inexperienced persons to save BASIC programs readily.

Reviewer: Ralph Tenny

Product Name: **Spell Perfect**
Equip. Req'd: Apple II w/48K and drive
Price: $89.95
Manufacturer: LJK Enterprises, Inc.
7852 Big Bend Blvd.
St. Louis, MO 63119

Description: A machine-language spelling checker program operating on Letter Perfect or any standard text files. It is compatible with most 80 column cards and has a file buffer of over 40,000 characters. Words are easily added to the dictionary from corrected documents and up to 255 dictionary disks are allowed - the program prompts for disk insertions.

Pluses: The well written manual is not needed for the most part being menu driven and having easily understood prompts. The program is fast (a 100 sector file took less than 2 minutes) and offers words to be corrected in context with the surrounding text. A "help" command is available to prompt you with similar sounding words from the dictionary or you can edit the word in place.

Minuses: The program doesn't recognize " ' " or " - " leading to problems with hyphenated or contracted words. A prompt to add word to dictionary instead of rerunning the program on the corrected file would be nice.

Documentation: The 72 page manual nicely complements the on-line prompting and answers all questions with specific examples.

Skill level: No particular computer knowledge necessary.

Reviewer: Phil Daley

Product Name: **The Complete Graphics System**
Equip. Req'd: Apple II, II, IIe, Color Monitor, disk drive, extra diskettes for backup copies and work disks
Price: *
Manufacturer: Penguin Software
830 4th Avenue
P.O. Box 311
Geneva, IL 60134

Description: As the title says, this is a complete graphics system. Easy enough for those who aren't programmers and sophisticated enough for those who are. You can create two and three dimensional graphics, use 108 blended colors, outline areas, fill them in, draw with lines, brushes (96 choices), use freehand drawing, employ preprogrammed boxes, arcs, circles, triangles, and ellipses. There is a program in which you can create your own shapes, store them in a table, and then draw on them whenever you choose. A variety of input devices are compatible: ordinary keyboard, joystick, trackball, touch tablet, paddles, Apple graphics tablet, a mouse, and Houston Instruments HiPad. (What's left?) An object can be magnified 2, 4, or 8 times its original size, rotated, shrunk, varied in intensity, and easily transferred to any drawing. Text can be added to graphics using another special program. As originally stated — this is a complete graphics system.

Pluses: The pluses are many. The fact that it can do all of the above is a plus; that it does them well merits special applause.

Minuses: Overall, there is no such thing as a perfect graphics package. There will always be flaws. As far as minuses go with this product they are truly insignificant, bordering on non-existent.

Documentation: The documentation is generally clearly written. There are some sections that could be more lucid, but with some rereading most everything can be figured out.

Skill level: Intermediate to advanced.

Reviewer: Mark S. Morano

A Basic DVORAK Keyboard for the VIC-20 and Commodore 64

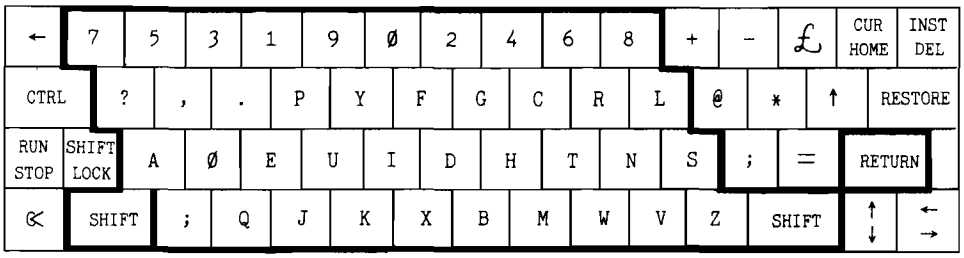

by Alfred J. Bruey

The current keyboard was designed to slow typists down. A new arrangement can increase productivity enormously

At the 1876 Centennial Exposition one exhibitor presented a strange gadget which is now known as the "typewriter." It did not receive as much attention as it should have because this new, practical discovery was overshadowed by the "telephone," another strange new invention.

One of the first typewriter designers, Christopher Sholes, found that if the keys were arranged in a reasonable order, they would jam because of their slow action. So he rearranged them so the keys that were often hit together would not get tangled with each other. His arrangement, which assigns the letters QWERTYUIOP to the top row of alphabetic keys, is still used today. I will refer to this arrangement as the QWERTY keyboard, for obvious reasons. If there is a QWERTY keyboard, there must, of course, be a non-QWERTY keyboard. Otherwise, what would I be writing about?

Actually, there are, or have been, many non-QWERTY keyboards. The one that I'll be discussing here, the Dvorak keyboard, was designed by August Dvorak in the 1930's. Dvorak wasn't the first to develop a non-QWERTY keyboard; in the last quarter of the nineteenth and first quarter of the twentieth century, there were a great variety of typewriter keyboard arrangements from which to choose. When I was collecting old typewriters a few years ago, before a lack of storage space put an end to that hobby, I found that probably the easiest-to-find non-QWERTY keyboard was found on the old Oliver typewriter whose model numbers went all the way to Number 9 before they were discontinued.

The DVORAK Keyboard

Figure 1 shows a drawing of the VIC-20 and C-64 keyboard with the commonly used keys changed to represent a simplified version of the Dvorak keyboard. Notice that no attempt was made to incorporate all the special characters. The arrangement in this figure follows that shown in an article (Dvorak Keyboard for Your Computer) by John Raines in the August, 1983 issue of MICRO Magazine. This article presented a 6502 machine language program for the Apple Computer, which allows the Dvorak arrangement to be used to input data to Apple programs.

The VIC DVORAK Program

The Dvorak keyboard program shown in Listing 1 is a demonstration program that you can run to see whether or not you like this "new" arrangement. All it does is put whatever you type on the screen.

The program logic is straightforward. A GET instruction is used to get characters, one at a time, from the keyboard buffer. Then the ASCII value of the character is obtained. A conversion table, entered with a DATA and READ statement, is used to convert the QWERTY characters to the equivalent Dvorak keyboard positions. Then the character is printed on the screen (in

Listing 1

```
10 DIM MT(47)
50 DATA 87,00,86,90,56,55,53,51,49,57,48,50,52,54,83,00
55 DATA 00,00,00,00,00,65,88,74,69,46,85,73,68,67,72,84
60 DATA 78,77,66,82,76,63,80,79,89,71,75,44,81,70,59
65 FOR I=1 TO 47:READ MT(I):NEXT I
100 GET K$:IF K$=""THEN 100
101 K=ASC(K$)
102 IF K=60 THEN K=44:UC=1:GOTO 115
103 IF K=62 THEN K=46:UC=1:GOTO 115
104 IF K=63 THEN K=47:UC=1:GOTO 115
105 IF K=91 THEN K=58:UC=1:GOTO 115
109 UC=0:IF K<>100 THEN UC=1:K=K-128
110 IF K$=CHR$(13) THEN PRINT CHR$(13);:GOTO 100
111 IF K$=CHR$(32) THEN PRINT CHR$(32);:GOTO 100
115 PRINT CHR$(MT(K-43)+128*UC);
120 GOTO 100
```

lines 110, 111, or 115). Then execution is returned to line 100 to GET the next character.

Using the Program

First press the SHIFT and COMMODORE keys to put the VIC into text mode. Next load the program (QWERTY LOAD translates to Dvorak NRAE) and the RUN it (RUN becomes PGB). Then you begin typing as though you had a Dvorak keyboard. When you are done using the program, press the RUN/STOP key to get out of the program and revert to the QWERTY keyboard.

Notice that only the characters outlined in the heavy black lines in Figure 1 are defined. You can use other characters, but you will probably get the message

```
?ILLEGAL QUANTITY ERROR IN 115
```

if you do.

Changing Your Keyboard

There are various ways to change your keyboard:

1. The easiest way is to put squares of masking tape on the keytops and write on the proper leters with a felt-tip pen. You might write the QWERTY symbols in one corner of the tape and the DVORAK in another.

2. You can change keycaps. This is not a trivial task and you should consider it only if you are making a permanent change.

3. Another temporary solution is to put the Dvorak character on tape on the front of the keycap, the way APL characters are often imprinted on keys. These characters can also be painted on the keyfronts for a permanent change.

Getting New Keyboard Arrangements Adopted

The major problem in trying to get a new keyboard arrangement adopted is that there are millions of people trained on the QWERTY keyboard. Another problem is that there are millions of QWERTY Keyboards in use. Tests performed since the 1940's have shown convincingly that it does not take long for the increased productivity possible with the Dvorak keyboard to recover the investment in re-training QWERTY typists on Dvorak keyboards. But many companies don't have the money to hire replacement help to keep up with the day-to-day work as their typists are being retrained. They also do not have the money to replace all their QWERTY hardware.

A simple solution to the hardware problem is in sight. The availability of computers with programmable keyboards makes it possible for users trained on two different keyboards to use the same computer (at different times, of course) by plugging in differently defined keyboards. By using this method, companies can gradually switch their employees to the Dvorak layout. A Dvorak keyboard is already available as an option for the IBM PC.

Program Extensions

As this program now stands, it is only useful as a demonstration of the Dvorak keyboard. You can't use this program to input data into a different program without some programming effort.

1. You can change this program to an input subroutine which you can attach to a more useful program. Then you can use the subroutine to enter data for the main program.

2. If you are going to use the Dvorak keyboard for your permanent keyboard arrangement, you will probably want to re-write this technique in machine language and use this program as a replacement for your computer's input routine. You can get help doing this from the MICRO article referenced earlier.

3. You might want to extend this system to handle the characters that I didn't include in my program.

4. You can add coding to print the characters on the printer as well as the screen, so you can have a record of your typing progress if you are using this program to learn the new keyboard.

MICRO™

Sure it's insured?

SAFEWARE™ Insurance provides full replacement of hardware, media and purchased software. As little as $35/yr covers:
• Fire • Theft • Power Surges
• Earthquake • Water Damage • Auto Accident

For information or immediate coverage call:

1-800-848-3469

In Ohio call (614) 262-0559

SAFEWARE™

SAFEWARE, THE INSURANCE AGENCY INC.

A Comparison:

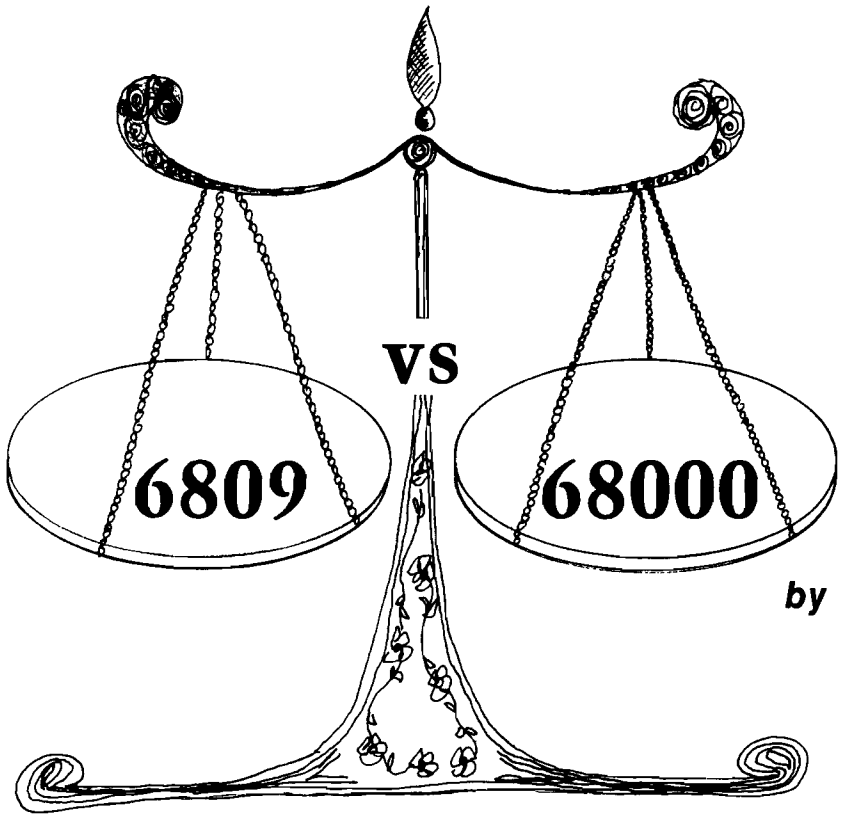

by Mike Rosing

The checkbook offers a simple but effective way to compare these two microprocessors

The 6809 microprocessor is found in several computers, including the Radio Shack color computer which is available just about anywhere. The 68000 microprocessor is also found in several computers. Some of these are APPLE's LISA and MACINTOSH computers and the SAGE II. While the 68000 based machines can cost 10 times the price of the 6809 based machines, they are easily 100 times more powerful.

To compare these two machines at the machine level requires a specific project; the check book is simple, but illustrative. This requires addition, subtraction, movement of values, the conversion of ASCII to binary. What follows is not a complete program. It does contain the main subroutines required to create a simple check book program in machine language on either the 6809 or 68000.

To avoid rounding problems the choice of integer arithmetic is preferred. The smallest unit of money is the penny, so all calculations are done in pennies.

Next we have to decide the maximum value with which we are going to deal. This value should be a power of two and so large that we will never reach it. Since 16 bits leaves us with $327.67 as a maximum value we take 32 bits as the size. This gives us $21,474,863.54 as a maximum value. Very few check books exceed this value (positive or negative).

Good machine code writing involves subroutines. Because the comparisons here are so simple, the subroutines may look silly. Remember that the purpose is comparison and not necessarily good code.

An implicit assumption in these subroutines is that some operating system is involved. Thus the user stack on the 6809 is presumed to be initialized. The 68000 is presumed to be in user mode and the stack pointer is initialized.

Movement

The first subroutine (MOVEATOB) is to move a quantity from point A to point B in memory. The 6809 code requires two load and two store instructions. These destroy the A and B registers so they are pushed on the stack before and recovered at the end of

the subroutine. The 68000 code can move 32 bits from memory to memory in one instruction without disturbing any other registers.

Addition

Next we need a subroutine to add numbers into an accumulator (see SUM). For the 6809 adding the least significant 16 bits is no problem. Since the carry can not be added to the D register, we have to go to byte addressing to sum the most significant bytes. Another way to do this is to create a loop count with the B register and use it as an offset. This runs slower than straight inline code.

The 68000 code can add 32 bit quantities in a single crack, so there is no need to worry about the carry bit. The ADD instruction is not as powerful as the MOVE instruction. It can only add with a data register. So we bring the 32 bit value into a data register and then sum this into the accumulator. Note that the MOVEM (move multiple registers) can be used with a single register as well as many registers.

ASCII to Binary

The simple example so far has assumed that the numbers are already in memory. Since most computers have keyboards which work in ASCII, we need a routine (GETNUM) to convert an ASCII string to a binary number which our subroutines can then add. Every operating system has its own method of getting characters from the keyboard. Here we assume that a subroutine can be written called GETBYTE which will return a byte from the keyboard into a register.

Once the string is pulled into memory and all the digits are in the range ASCII '0' to ASCII '9', the process of conversion can begin. Multiplying the result by 10 and adding in each byte of the string converts from human base 10 to computer base 2. A simple way to multiply 32 bits by 10 is to first multiply by 2 and save this in a temporary location. Then multiply by 4 (giving a final multiplication by 8) and add in the temporary value. Multiplication by 2 consists of a shift left.

For the 6809, the subroutine ROTL rotates the result area left one bit. Calling this 3 times with a MOVEATOB and the SUM subroutines completes the multiplication. Finally, a digit from the input string is masked off and added to the result. The addition requires propagating the carry

```
* MOVING 32 BIT VALUES CODE COMPARISON
*
*   6809 CODE
*  SUBROUTINE MOVEATOB MOVES A 32 BIT VALUE POINTED
*  TO BY X TO THE PLACE POINTED TO BY Y.
*
MOVEATOB: PSHU    D      SAVE D REGISTER
          LDD     ,X     GET 16 BITS
          STD     ,Y     SAVE 16 BITS
          LDD     2,X    NEXT 16 BITS
          STD     2,Y    SAVED
          PULU    D      RECOVER D REGISTER
          RTS            AND LEAVE
*
*  68000 CODE
*  SUBROUTINE MOVEATOB MOVES A 32 BIT VALUE POINTED
*  TO BY A0 TO THE PLACE POINTED TO BY A1.
*
MOVEATOB: MOVE.L  (A0),(A1)  MOVE 32 BITS
          RTS                AND LEAVE
*
-------------------------------------------------------
*
* SUMMING 32 BIT VALUES CODE COMPARISON
*
*  6809 CODE
*  SUM ADDS A 32 BIT NUMBER POINTED TO BY X TO AN
*  ACCUMULATOR POINTED TO BY Y.
*
SUM:      PSHU    D      SAVE REGISTER
          LDD     2,X    GET LEAST SIGN. BITS
          ADDD    2,Y    ADD TO ACCUMULATOR
          STD     2,Y    SAVE RESULT
          LDA     1,X    ONE BYTE UP
          ADCA    1,Y    ADD IN CARRY TO NEXT BYTE
          STA     1,Y    SAVE BYTE
          LDA     ,X     MOST SIGN. BYTE
          ADCA    ,Y     ADD TO ACCUMULATOR AND CARRY
          STA     ,Y     SAVE RESULT
          PULU    D      RESTORE REGISTER
          RTS            AND LEAVE
*
*  68000 CODE
*  SUM ADDS A 32 BIT NUMBER POINTED TO BY A0 TO AN
*  ACCUMULATOR POINTED TO BY A2
*
SUM:      MOVEM.L D0,-(SP)  SAVE A REGISTER
          MOVE.L  (A0),D0   GET NUMBER
          ADD.L   D0,(A2)   SUM INTO ACCUMULATOR
          MOVEM.L (SP)+,D0  RECOVER REGISTER
          RTS               AND LEAVE
*
-------------------------------------------------------
*
*  CONVERTING ASCII TO BINARY CODE
*
*  6809 CODE
*  GETNUM BRINGS AN ASCII STRING INTO MEMORY AND CONVERTS
*  IT TO A BINARY NUMBER. ALL ENTRIES ARE IN PENNIES.
*  ENTER WITH X POINTING TO PLACE FOR NUMBER TO GO.
```

```
*
GETNUM:   PSHU    D,X,Y     SAVE REGISTERS
          CLR     3,X       ZERO RESULT AREA
          CLR     2,X
          CLR     1,X
          CLR     ,X
          LEAY    INSTRING  POINT TO INPUT AREA
GNLOOP:   BSR     GETBYTE   GET BYTE FROM KEYBOARD
          CMPA    #13       WAS IT A CARRIAGE RETURN ?
          BEQ     KRUNCH    THEN PROCESS STRING
          CMPA    #'Ø'      WAS IT TOO SMALL ?
          BLT     GNLOOP    THE IGNORE IT
          CMPA    #'9'      WAS IT TOO BIG ?
          BGT     GNLOOP    THEN IGNORE IT
          STA     ,Y+       SAVE BYTE INTO STRING
          BRA     GNLOOP    AND GET NEXT CHARACTER
*
*  HAVE STRING IN MEMORY, NOW PROCESS IT.
*
KRUNCH:   CLR     ,Y        MARK END OF STRING
          CLR     COUNT     BYTE COUNT INTO STRING
*
*  MULTIPLY RESULT BY TEN.
*
CNVRT:    LEAY    TEMP      POINT TO TEMP AREA
          BSR     ROTL      RESULT TIMES 2
          BSR     MOVEATOB  PUT INTO TEMP
          BSR     ROTL      RESULT TIMES 4
          BSR     ROTL      RESULT TIMES 8
          EXG     X,Y       ADD RESULT
          BSR     SUM       TO TEMP AND SAVE
          EXG     X,Y       INTO RESULT
          BCS     TOOBIG    ERROR: NUMBER TOO BIG
*
*  ADD IN BYTE FROM STRING
*
          LEAY    INSTRING  GET NEXT
          LDA     COUNT     BYTE
          LDB     A,Y       FROM STRING
          BEQ     DONE      NO MORE TO DO
          CLRA              HIGH BYTE OF D CLEARED
          ANDB    #15       KEEP LOW NIBBLE ONLY
          ADDD    2,X       ADD IN RESULT
          STD     2,X       SAVE RESULT
          BCC     BMPCNT    NO CARRY TO PROPOGATE
          LDA     1,X       ADD IN
          ADCA    #Ø        CARRY BIT
          STA     1,X       TO EACH
          BCC     BMPCNT    BYTE IF
          LDA     ,X        NECESSARY
          ADCA    #Ø
          STA     ,X
*
*  BUMP TO NEXT BYTE IN STRING AND CHECK FOR DONE
*
BMPCNT:   INC     COUNT     BUMP STRING COUNTER
          LDA     COUNT     DONE WITH STRING ?
          TST     A,Y
          BNE     CNVRT     NOT YET
DONE:     PULU    D,X,Y     RECOVER REGISTERS
          RTS               AND LEAVE
*
*  ERROR HANDLER WILL BE MACHINE DEPENDENT
*
TOOBIG:   (SEND ERROR MESSAGE TO SCREEN)
*
*  DATA AREA
*
INSTRING: 2Ø BYTES
TEMP:      4 BYTES
COUNT:     1 BYTE
```

through all 32 bits of the result. The loop is repeated until all string digits have been converted or an error occurs.

Comparing the 68000 version of GETNUM to the 6809 version, we see that one instruction of the 68000 does the same as two calls to a 10 line subroutine of 6809 code. To shift 32 bits left once, takes ROTL for the 6809. To shift 32 bits left twice, takes only one line of code for the 68000. The number of registers on the 68000, reduces a lot of memory requirements. While the 6809 must continually swap pointers from register to memory, the 68000 keeps all values in registers, for this simple example at any rate.

Conclusion

These simple comparisons are intended to be educational. Experience with the 68000 sometimes makes writing code on the 6809 frustrating. The ability to address 16 megabytes of RAM on the 68000 versus 64 kilobytes on the 6809 makes one wonder if the term "micro" really applies anymore.

The reduced coding required for the 68000, increases programmer productivity and decreases the time for producing a final result. Obviously, there are many ways to solve each problem. The flexibility of the 68000 and the number of registers, makes this microprocessor the most powerful chip to date. While the 6809 makes a great home based computer, the power of the 68000 makes it far more useful in the business or scientific environment.

Bibliography

"MC6809 Preliminary Programming Manual", Motorola Inc., 1979

"Color Computer Assembly Language Programming", William Barden, Radio Shack

"16-Bit Microprocessor Users Manual", Motorola, Prentice-Hall, 1982

"Motorola Microprocessors Data Manual", Motorola, 1981, pgs. 4-298 to 4-329 and pgs. 4-661 to 4-710

Mr. Rosing received a B.S. Engineering Physics from Univ. of Colorado in 1976, and a Ph.D. in Nuclear Engineering from Univ. of Wisconsin in 1982. He is presently Chief Engineer for Network Telecommunications in Denver.

ATARI 48K * TRS C/C 32K
COMMODORE 64
747 FLIGHT SIMULATOR

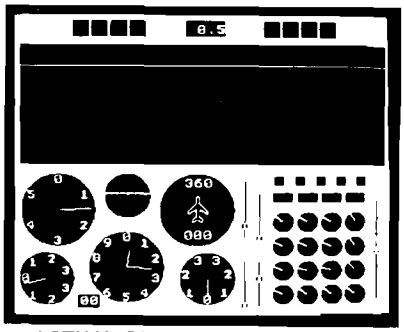

ACTUAL SCREEN PHOTOGRAPH

Superbly realistic instrumentation and pilot's view in lifelike simulation which includes emergencies such as engine fires and systems failures. This program uses high resolution graphics to the full to produce the most realistic flight-deck display yet seen on a home computer. There are 21 real dials and 25 other indicators. Your controls operate throttle, ailerons, elevators, flaps, slats, spoilers, landing gear, reverse thrust, brakes, etc. You see the runway in true perspective. Uses joysticks and includes options to start with take-off or random landing approach. A real simulation, not just another game! **Cassette only, $27.95 (add 6% in Calif.). Sole U.S. distributor for D.A.C.C. Ltd., England.**

F. Ashton
P.O. Box 7037
Chula Vista, CA 92012

Come See Us at Commodore Convention

Sat. & Sun,July 28-29
Hershey, Pennsylvania

The show is being run by the Mid-Atlantic Regional Commodore Association (MARCA) and there will be speakers, workshops, and exhibitors. For info. call Mindy at 717/486-3274.

It's an easy trip from all areas of the east, from CT to VA, and a lovely place with lots of family fun.

Come visit us at
Booth Number 101
try some of our latest software packages, and say "Hi" to the MICRO Staff.

```
*
*  SUBROUTINE TO ROTATE 4 BYTES LEFT ONCE
*  ENTER WITH X POINTING TO BYTES TO ROTATE
*
ROTL:     PSHU    D         SAVE REGISTER
          ANDCC   #Ø        CLEAR CARRY BIT
          LDB     #3        SET COUNTER
ROTLOOP:  LDA     B,X       GET BYTE
          ROLA                TIMES 2
          STA     B,X       SAVE BYTE
          DECB                DO 4 TIMES
          BPL     ROTLOOP
          PULU    D         RECOVER REGISTER
          RTS                 AND LEAVE
*
*  68ØØØ CODE
*  GETNUM BRINGS AND ASCII STRING INTO MEMORY AND
*  CONVERTS IT TO A BINARY NUMBER. ENTRIES ARE
*  ASSUMED TO BE IN PENNIES. ENTER WITH A3
*  POINTING TO THE PLACE FOR THE RESULT.
*
GETNUM:   MOVEM.L DØ-D2/AØ,-(SP)  SAVE REGISTERS
          LEA     INSTRING,AØ     POINT TO INPUT AREA
GNLOOP:   BSR     GETBYTE         GET KEYBOARD INPUT
          CMP.B   #13,DØ    WAS IT A CARRIAGE RETURN ?
          BEQ     KRUNCH     THEN PROCESS STRING
          CMP.B   #'Ø',DØ    WAS IT TOO SMALL ?
          BLT     GNLOOP     THEN IGNORE IT
          CMP.B   #'9',DØ    WAS IT TOO BIG ?
          BGT     GNLOOP     THEN IGNORE IT
          MOVE.B  DØ,(AØ)+ SAVE BYTE INTO STRING
          BRA     GNLOOP     AND GET NEXT BYTE
*
*  HAVE STRING IN MEMORY. NOW PROCESS INTO BINARY
*
KRUNCH:   CLR.B   (AØ)       MARK END OF STRING
          CLR.L   D1         CLEAR RESULT
          LEA     INSTRING,AØ     POINT TO TOP OF STRING
*
*  MULTIPLY RESULT BY TEN
*
CNVRT:    LSL.L   #1,D1      RESULT TIMES 2
          MOVE.L  D1,D2      SAVE THIS RESULT
          LSL.L   #2,D1      RESULT TIMES 4 MORE FOR 8
          ADD.L   D2,D1      ADD IN 2 FOR 1Ø TIMES
          BVS     TOOBIG     NUMBER TOO BIG
*
*  NOW ADD IN BYTE FROM STRING
*
          MOVE.B  (AØ)+,DØ GET BYTE FROM STRING
          AND.L   #15,DØ     MASK OFF ALL BUT LOW NIBBLE
          ADD.L   DØ,D1      ADD TO RESULT
          BVS     TOOBIG     TOO MANY DIGITS
          TST.B   (AØ)       DONE YET ?
          BNE     CNVRT      NOPE, KEEP ADDING BYTES
          MOVE.L  D1(A3)     SAVE RESULT MEMORY
          MOVEM.L (SP)+,DØ-D2/AØ   RECOVER REGISTERS
          RTS                AND LEAVE
*
*  SUBROUTINE TO SEND ERROR MESSAGE TO SCREEN
*
TOOBIG:   SEND ERROR MESSAGE TO SCREEN
*
*  DATA AREA
*
INSTRING: 2Ø BYTES
*
*
```

Flight Simulator II
Microcomputer Simulation At Its Best

by Chris Williams

By analyzing this design masterpiece, programmers may discover the elements needed to make their own software great

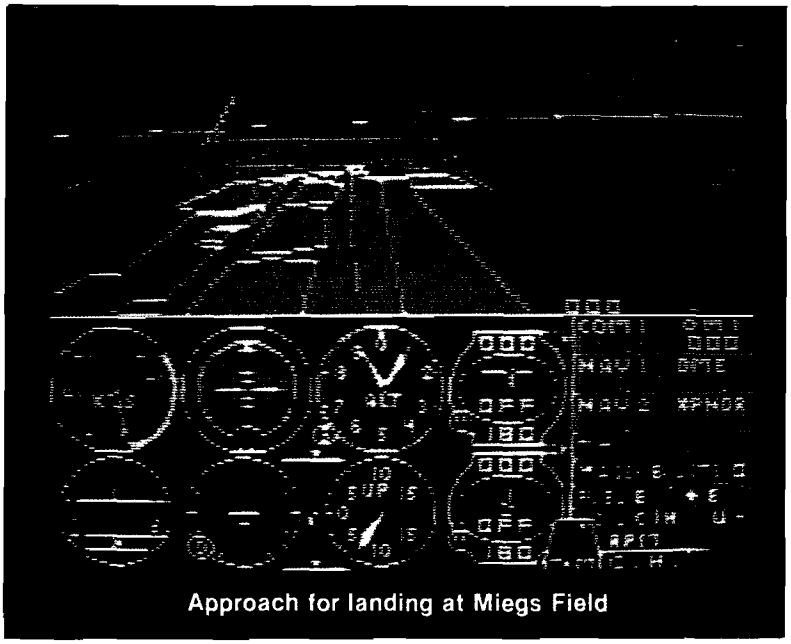

Approach for landing at Miegs Field

Until now, simulations designed for microcomputers have been unexciting, crude approximations of whatever real-life phenomenon they were trying to model. They were slow. They lacked detail. And all too often, the modeling equations employed were out-and-out wrong. But no longer. A company called SubLogic Corporation has seen fit to single-handedly advance the state-of-the-art in microcomputer simulation technology beyond its childhood stage into exciting, energetic adolescence.

SubLogic was the manufacturer of Flight Simulator, the first popular microcomputer flight simulation. It was designed to run on a 16K Apple II, and it did so -- more or less. Amid relatively little fanfare, they've now released a sequel designed for the newer crop of Apples that sport 64K. There are also versions out for other machines. They call it Flight Simulator II, but there all similarity between sequel and original ends.

Flight Simulator was revolutionary in its day. No one had done a flight simulation on a microcomputer before Bruce Artwick, co-founder of SubLogic, worked his magic. The final product ran reasonably well, but it was slow and the graphics lacked pizazz.

Not so with Flight Simulator II. The screen updates are faster and detailed scenery for four different parts of the U.S. are included with the package. Additionally, the company advertises the availablility of scenery disks for other areas of the U.S. It all makes for a degree of realism never before approached on a microcomputer.

Flight

The airplane modeled in Flight Simulator II is a Piper PA-28-181 Archer II; a single engine, 148 mph., non-retractable gear general aviation aircraft. In real-life, the Archer II performs very well while remaining easy to fly. It is, consequently, an excellent choice for the product.

The simulation flight controls are on the keyboard. SubLogic includes helpful cue-cards with the package that specify which keys do what. As a pilot, I found flying with keys instead of a control yoke and rudder pedals disconcerting at first, but I soon adjusted. At my request, other pilots tried it and agreed the adjustment came easy. A non-pilot would probably never notice.

The layout of the keyboard is fascinating and all computerists writing user-interactive routines could learn from it. The T,F,H,B diamond is used as the control yoke of the aircraft. It's perfect for one hand operation and easily learned.

But it's in the use of the G key that something innovative has been added. Whatever the value of the aileron

control variables (set by F and H), they are nulled to neutral with a single press of G. Without this, several key presses of either F or H would be necessary to return a given setting to zero. They gave this problem a lot of thought and came up with an excellent answer.

Some of the most interesting features of the product are in the navigation and communications radios. Here the simulation uses cntl-C and cntl-N followed by greater-than or less-than signs to simulate changing a frequency. This is a good choice as cntl keys are generally a bit awkward. Why is that good? Because nothing in flying is as awkward as changing radio frequencies in turbulence. Making it difficult on the simulation is entirely appropriate.

The Editor

The product includes a particularly valuable feature called "The Editor". At any time during flight, a touch of the ESC key sends you to The Editor, and from there you can change the current flight situation to be anything you wish.

The procedure is interesting and, again, programmers should take note. When you press the ESC key, a menu entitled "Simulation Control" is displayed. The menu is two pages long. Moving off the bottom of one page automatically sends you to the other. These two pages contain a list of simulation variables and their current values. By positioning the cursor at the proper variable line and entering a new value, the user can quickly change his situation without having to fly into it.

There are two valuable applications for this feature. First is the ability to set North and East coordinates which allows the user to instantly change from, say, the Chicago scenery area to the Boston-N.Y. scenery area without a time consuming crossing of the intervening distance between.

The second valuable application has to do with Critical Attitude Recovery. CAR is required by the FAA (Federal Aviation Administration) as an integral part of the instrument flight training curriculum for pilots attempting to add an instrument rating to their license. CAR is taught in an actual airplane, generally as follows. The student, wearing a hood to restrict his vision to the instrument panel, is told to close his eyes or cover them while the instructor takes control of the aircraft. The instructor then places the aircraft in an "unusual" or "critical" attitude. This is typically an extreme nose high or low configuration with a very steep bank included.

After a few seconds delay (to let the gee-forces confuse the student's equilibrium), the instructor tells the student to open his eyes and, using no outside visual references (i.e., instruments only), recover the aircraft to normal, straight-and-level flight.

The Editor allows a user to practice this procedure. Extreme values for the pitch, roll, and yaw variables can be entered at the Simulation Control menu and then, when the user exits Edit mode, he is faced with a critical attitude. Recovery technique is the same on the simulator as in real life so the exercise is excellent practice.

The Weather

Any pilot will tell you that the single most important factor in flying is the weather. Winds aloft, turbulence, and clouds often determine more about a flight than the pilot's wishes. Therefore, a simulation predicated on its accuracy in modeling real-life operation must have user variable weather. Naturally, Flight Simulator II does.

This is another area where the computerist can learn from what SubLogic has done. They've devoted attention to detail and implemented features to promote realism even where it makes the programming complex. Having this sort of professional attitude is probably more important than sheer technical skill in producing excellence in a program.

SubLogic handled the weather by allowing the user to define two layers of clouds and four of wind. Wind adjusts the airplane's ground speed for given airspeeds and clouds simply clear the screen to white when the airplane is at a blanketed altitude. With cloud bases set at about 500 feet, the airplane "breaks out" on an ILS (Instrument Landing System) instrument approach lined up nicely with the runway, making final descent and landing both easy and immensely satisfying.

Incidently, when the #1 Nav. radio is tuned to the ILS frequency, the glideslope needle on the indicator becomes active. The Localizer needle acts as it does for all the VOR navigational beacons. The pilots reading this will appreciate the level of detail SubLogic is covering there.

Turbulence is also permitted as a user-defined feature. Its effect is random motion of the instruments which makes the airplane harder to fly.

Lastly, the user can specify a given season. The effect of this is to change the time of day when night falls. Oh yes, there's a night mode, and it *is* hairy. Would you have expected anything less?

Seeing the World

The reason most pilots love to fly is nowhere near as esoteric and romantic as they'd have you believe. It's really very simple. The higher you are, the more pleasant things you can see. Flight Simulator II was clearly designed with that in mind. The original Flight Simulator was a forward-looking simulation that had nothing of consequence to see in its database. This product allows the user to look in all directions by using a special key sequence. Such is the attention to detail that when you look out the rear window of the cabin, the rudder is superimposed on the screen as a thick vertical line. And, of course, when you look out the side, the wingtip is prominent at the bottom of the screen.

There's another viewing mode included that is not realistic. It's called Radar Mode. In this mode, the user can get a top view of the world and an impression of where the airplane is with respect to landmarks. This is unavailable on a real airplane and therefore somewhat bizzare, but for users to whom flying is unfamiliar it probably is a valuable, perhaps even vital, feature.

Emergency Procedures

What do you do if the engine quits? That is the first question people new to single-engine flying ask. The answer (which I've found is always responded to with a chuckle) is to execute the emergency procedures all pilots are trained to perform. But there are also other emergencies in flying that a pilot can encounter. Flight Simulator II has a feature that will throw them all at a pilot randomly to see how he reacts. It's called the Reliability Factor. This is a number the user selects from the Editor's Simulation Control menu. Anything less than 100 percent here and things start to go wrong. The lower the number, the more they go wrong.

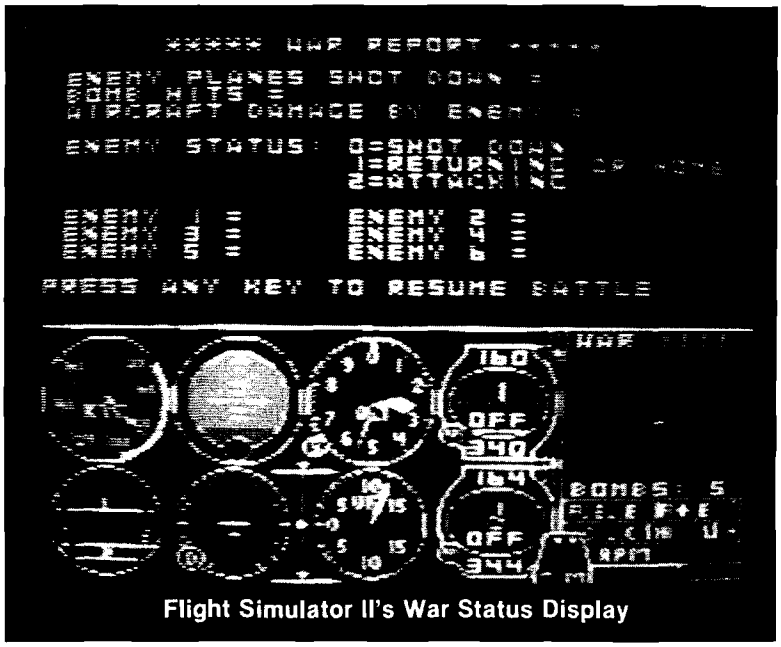

Flight Simulator II's War Status Display

This is an excellent feature. The malfunctions modeled are often subtle and a pilot's inattention to his instruments can result in a simple problem becoming fatal. It's a good training aid in that it really brings home to the user the importance of staying sharp and alert.

The Dogfight Game

They call it World War I Ace, and since today's general aviation airplanes are similar in performance to World War I fighters, I suppose it was inevitable. As an option of the Simulation Control menu, the user may select the dogfight game and fly against enemy fighter aircraft.

Actually, it's not bad. It's not simply a shoot 'em up. The user still has to fly his airplane properly and manuever into position in order to bomb ground targets or shoot down enemy fighters. If he fails to fly properly, the airplane will stall and crash, just as it would in the pure simulation mode.

Rules of the game are standard; you get points for shooting fighters down or bombing fuel depots, and you lose points for getting shot. Additionally, your plane degrades in performance each time it gets hit.

One rather interesting feature of the game is worth special mention because of its educational value to computerists. Unlike any actual World War I fighter, the one in this game has air-to-air radar. What this does is provide the user with information concerning targets where no information would otherwise have been available.

That is important because it demonstrates a flexibility on the part of SubLogic. They concentrated hard on realism throughout the product, but they didn't lose their ability to perceive the need for a feature that wasn't real. That's rare. I often see programmers who, once they learn to juggle assembly language routines, refuse to take advantage of those features of BASIC that simply cannot run any faster. That sort of locked-in attitude costs hours of programming time. One should guard against it.

Conclusions

This product is one of those that can be perceived as something special even before the marketplace has passed its judgement. As such, one feels compelled to examine it and determine what core characteristic makes it what it is and, further, what does it have in common with other software programs already acknowleged as masterpieces of design.

Through this sort of analysis, programmers can remove a bit of the uncertainty in software design. They can find certain prerequisite things their programs must have to excel. They can make the process more of a science and less of an art. So what is it about Flight Simulator II? What is it that makes it superb? Is it something that can be emulated?

My opinion is that the program was planned intricately, written intricately, and, most important, debugged intricately. That all comes down to one phrase - attention to detail. They covered *everything*. Frankly, most programs don't cover half of what they could — and therefore should. Programmers need to make a rule for themselves. This rule would say that on the day the "Finished!!" tag is hung on a program, an X is placed on the calendar for two weeks in the future. The programmer must continue testing and working on the program until that day. Just think of how many bugs would never find their way to market.

MICRO™

Approaching Los Angeles International Airport

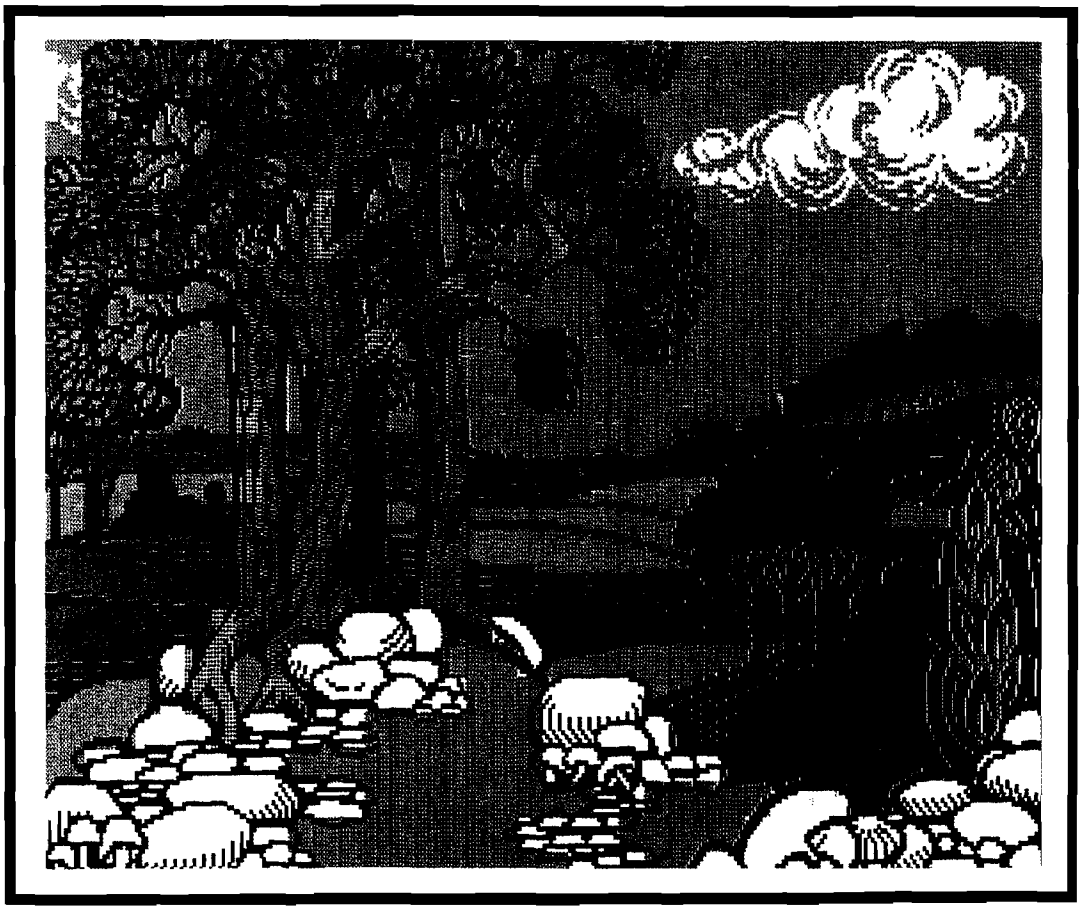

Graphic Print for Commodore 64

(Part 1)

by Michael J. Keryan

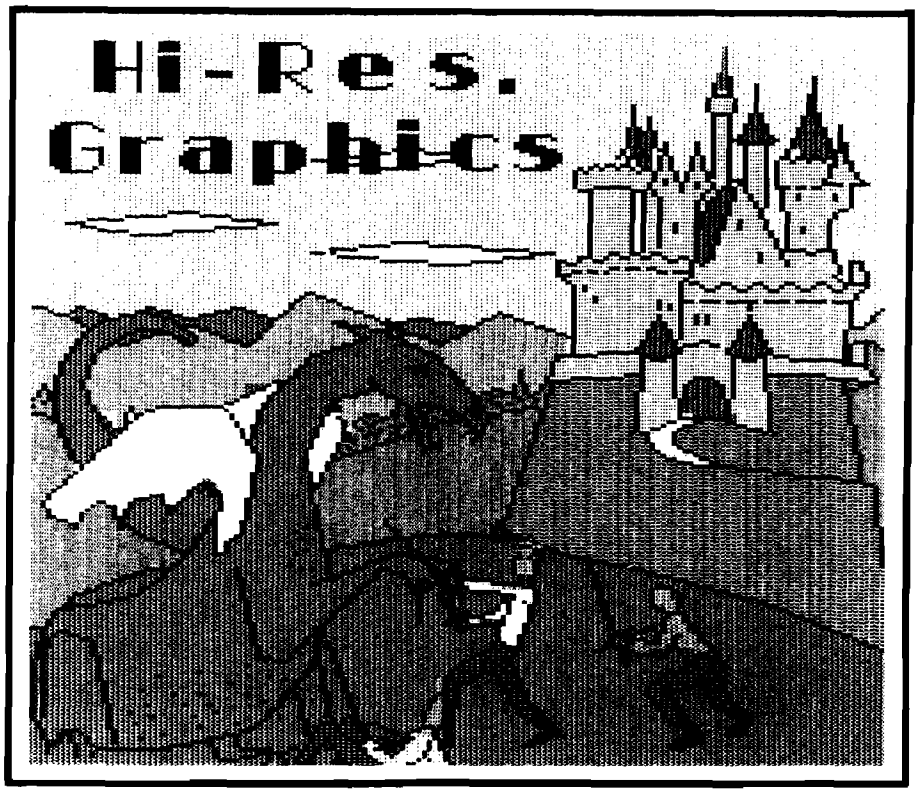

Editor's Note: This is part 1 of a three part series. Parts 2 and 3 will appear in subsequent issues.

Create a full-page printout from a Commdore 64 high resolution display

The Commodore 64 is capable of displaying some pretty impressive graphics. Take a look at a few of the games recently introduced, like Neutral Zone, Blue Max, or Pogo Joe. Most sophisticated games use a high-resolution bit-mapped display rather than the alphanumeric/graphic-symbol display that most of you use for your programs.

High-resolution bit-mapped graphics (and the multi-color variation) are described in the Commodore 64 Programmer's Reference Guide. The manual even shows you how to create a display using PEEKs and POKEs. However, since several thousand memory locations are involved, BASIC is extremely slow. Any practical use of high resolution graphics must use machine language routines. Since most people are not familiar with assembly or machine language programming, quite a few graphic aid and drawing programs for the Commodore 64 have been developed.

I was quite disappointed when I learned that pictures that were created on my Koala Pad could not be dumped to my printer. I also found that even though other graphic packages contained graphic dump routines, the resulting printouts were much less than perfect. Many routines give rather small drawings, one dot on the screen to one printed dot--this results in a picture a little smaller than 3 inches by 4 inches. Many graphic dump routines use the Commodore 1525 graphic mode which can be emulated by a number of interfaces with non-Commodore printers, but this technique is very slow. The most serious fault of all of the routines I've seen is their inability to recognize a color on the screen and translate it to a pattern that is approximately the same darkness of the color. Most graphic dumps print, at most, 3 or 4 varying shades of black dots, even though one of the colors represented is white.

Since a perfect graphic dump program wasn't available, I decided to write one. These were the objectives that I set for this program:

1. It will work in either standard HiRes or multi-color mode.
2. Printouts should be large, about the same size as the display on my Commodore 1701 color monitor (approx. 7" x 9"). This will fit nicely on a normal sheet of paper with one inch borders on all sides.

Figure 1. Graphics Bit-map Mode

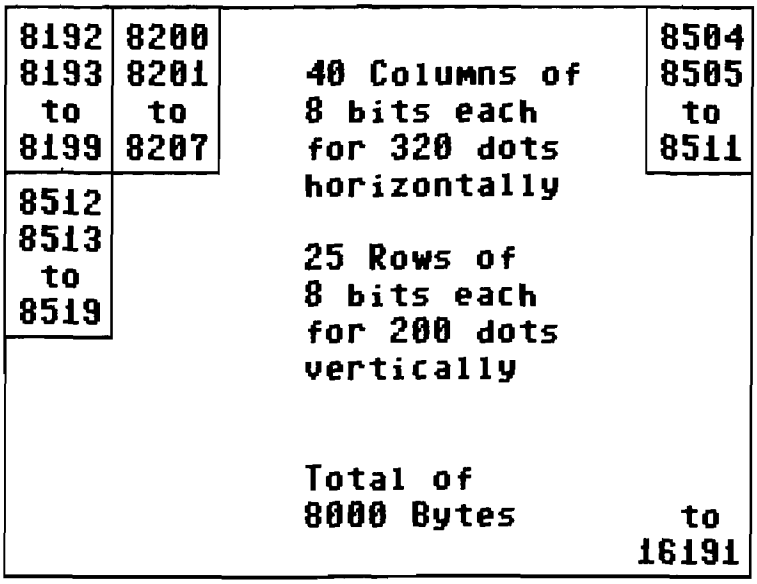

3. The dump routine should work on my printer as well as those of my friends. These include NEC 8023, Prowriter (C. Itoh), Epson MX-80 and FX-80, and Gemini (Star) printers. Sorry 1525 owners, you're on your own.

4. Fast--to get the needed speed to print a full page of graphics, the print commands should directly access the printhead (transparent interface operation).

5. A unique dot pattern should be used for each of the 16 colors, so that any two adjacent colors can be distinguished. Each pattern should vary in intensity roughly in proportion to the darkness of the color on the CRT. Needless to say, the program should be able to determine the color of each dot on the screen.

6. Printouts of any part of the screen or the whole screen should be possible.

7. Most important, the program should be able to access graphic displays made from a number of graphic aid and drawing programs.

All of these objectives have been met and the resulting Assembly language program, GDUMP, is shown in Listing 1. The program is not especially compact; in fact, it uses quite a bit of memory for lookup tables. However, it works as per the above objectives and is the best graphic screen dump program that I have seen for the Commodore 64.

High Resolution Bit Map

Before describing how the program works, a short review of Commodore 64 bit map graphics is helpful. The standard high resolution bit map screen of the 64 is divided into 320 dots horizontally and 200 dots vertically. Each dot corresponds to a bit in memory. Therefore, 320 x 200 = 64000 bits, or exactly 8000 bytes of memory is required to hold this bit map pattern of ones (bit is on) and zeros (bit is off). Let's assume our bit map memory starts at $2000 hexadecimal (or 8192 decimal). The order of the bytes in memory do not correspond to the manner in which the lines are scanned on the CRT--they are arranged in 8 byte blocks as shown in Figure 1.

Despite the fact that the bytes are arranged in memory a little strangely, you can see that the screen is made up of 320 bits across and 200 bits down. You can think of this as: when a bit is off (0) the corresponding dot will be off (black), and when a bit is on (1) the dot will be on (white). Many two-color screens are set up like this, but the HiRes screen (HIRES) is a little more complicated than this, as shown in Figure 2. For every 8 byte block of bit map memory (or every 8x8 dot square) there exists a corresponding one byte of screen memory.

Let's assume this 1K block of memory starts at $0400 (1024 decimal). The colors of the foreground and background are picked up in the screen byte. The way one byte can hold two colors is by breaking the 8 bit byte into two 4 bit nibbles. With 4 bits, each nibble can hold a number from 0 to 15, for one of the 16 colors. Therefore, for every 8x8 square of dots, the color displayed for any of these 64 dots can be found in the high nibble of the corresponding screen memory if the bit is on (1) and in the low nibble if the bit is off (0). Note that only two unique colors can be displayed in any 8x8 block of dots, but an adjacent block can have any two other (or the same) colors.

Figure 2. Memory - High-res Mode

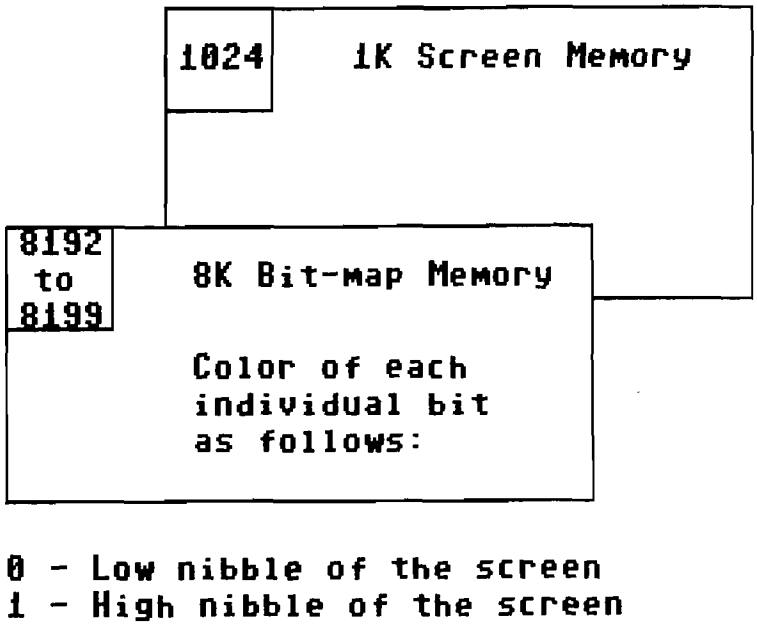

Figure 3. Memory - Multicolor Mode

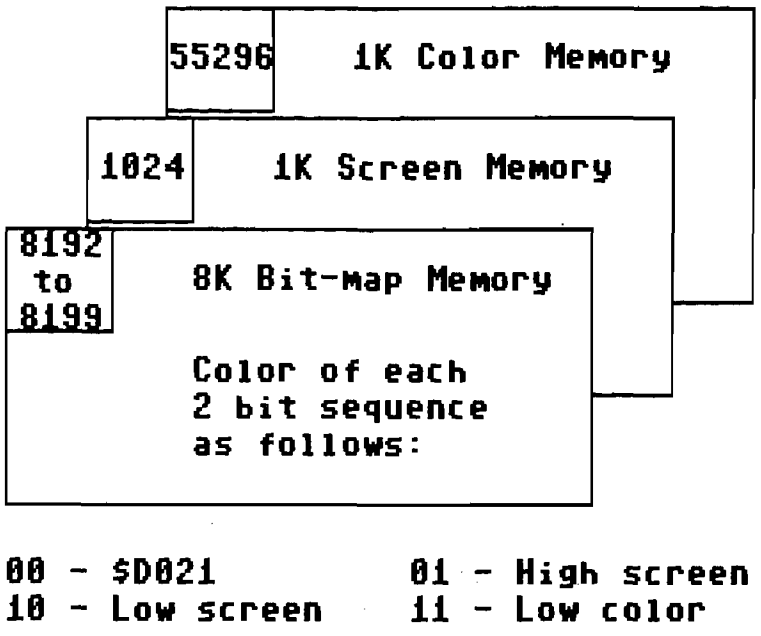

Multi-Color Bit Map Mode

If you thought the last section was difficult, you may as well skip this section right now. With the HIRES mode, there are two separate blocks of memory to worry about. In multi-color mode (MULTI) there are three blocks of memory, as shown in Figure 3. An additional 1K block of memory (usually starting at $D800 or 55296 decimal) is also used to store color information. In MULTI-color mode, the horizontal resolution is reduced to 160 dots, half of that as HIRES mode. Actually, there are still 320 dots on the screen, but the color can only change for every two dots. In every two-dot sequence of the bit-map memory, we can get four possible patterns of bits: 00, 01, 10, or 11. The pattern determines where the color for these two dots can be found. So in any 8x8 square of dots, a total of 4 colors are possible. Three of these colors can be different for every 8x8 square, but one color is common to all squares--the sequence of two zeros calls for the color in the background color register $D021.

To get an accurate graphic screen dump, we must first determine the location of each bit in an BK bit-map block, and determine the corresponding colors from either the upper or lower nibble of screen memory, the lower nibble of color memory, or from the background color register. Each color must be translated to a unique pattern for a dot-matrix printer, and these patterns must be sent to the printer. A method is also required to duplicate dot patterns for grids larger than the original 320x200 dot grid.

GDUMP

The assembler (Listing 1) is commented, so you should be able to follow along, if you are familiar with machine language. The program is assembled to begin at $5000. There were very few memory areas left to put this code, when you want it to be compatible with the files containing graphic data from various third party routines. I decided to stick it right in the middle of your BASIC workspace. All the important constants were brought near the beginning to allow easy changes. The minimum and maximum horizontal and vertical byte numbers are located at $5003-$5006. The upper left of the screen is 0,0; the lower right is 39,199. You can change these if you want only part of the screen printed (but you will also have to change N1-N4 and EN1-EN2 in GSETUP and ESETUP).

There are four modes of operation:

0. Mode 0 is for two-color HIRES printouts. Every bit equal to 1 prints a 2x2 black square.

1. Mode 1 inverts the dots of mode 0. Bits that are equal to 1 print a 2x2 white area; bits equal to 0 print black dots.

2. This is MULTIcolor mode in which colors are determined from one of four possibilities as in Figure 3.

3. This is HIRES color mode in which colors are determined from either high or low nibbles of the screen memory as in Figure 2.

The starting page number for the bit-map memory, screen memory, and color memory are stored in $5008-$500A. These can be changed from the defaults ($2000, $0400 and $D800) for non-standard screen configurations.

The program begins by jumping to a printer setup routine. For TYMAC CONNECTION interfaces, an extra sequence is required before any other sequences. This is equivalent to CHR$(27) "W"CHR$(00). It disables the width command in the interface and is necessary to disable printing a carriage return after 80 graphic bytes. The printer channel is opened with a secondary address which puts the interface into transparent mode (5 for CARDCO, 6 for CONNECTION). Next the correct codes are sent to change the printer spacing to 1/9 inch vertically, to eliminate blank spaces between lines. These sequences are different for NEC/C.ITOH and EPSON/GEMINI printers. Then a carriage return is sent to start the printer at a known state.

Three loops can be found in the code: LOOPH, LOOPV and LOOPN. LOOPH cycles through the 40 horizontal screen bytes. LOOPV cycles through the 200 vertical bytes. LOOPN cycles through the repeat counter REPT several times for each of the 200 lines. REPT is set up to 3 for NEC/C.ITOH and 2 for EPSON/GEMINI. This gives a total of 600 or 400 dots, respectively for the top to bottom CRT scan (left to right on the printer). For both types of printers, this gives a line length of about 7 inches. Actually LOOPH is cycled through twice, since two dots are printed for every horizontal dot on the screen. If you follow through the logic in the area of LOOPN, you will see that every byte sent to the printer (for the 8 dots on the printhead) is made up of two 4 bit nibbles, each derived from a two-bit horizontal dot sequence on the screen.

Subroutine CHKREV simply reverses the 8-bit pattern for EPSON type printers since the printhead is set up the opposite of NEC type printheads. This routine also replaces every $0D bit pattern with $0B. For an

Listing 1

```
                ; GRAPHIC SCREEN DUMP  V1.2
                ;   M. J. KERYAN    3-27-84
                ;
                ; TO BE USED WITH 'TYMAC CONNECTION'
                ; OR SIMILAR TYPE OF INTERFACE
                ; AND PRINTERS—
                ;   NEC 8Ø23, PROWRITER, C.ITOH 851Ø
                ;   OR EPSON WITH GRAFTRAX OR
                ;   EPSON COMPATIBLE PRINTER.
                ;

5ØØØ                        ORG $5ØØØ
                ;
5ØØØ 4C 39 5Ø   GDUMP       JMP GSTART
                ;
5ØØ3 FF           MINH      BYT $FF     ; HORIZ. MIN.-1
5ØØ4 27           MAXH      BYT 39      ; HORIZ. MAX.
5ØØ5 ØØ           MINV      BYT Ø       ; VERT. MIN.
5ØØ6 C8           MAXV      BYT 2ØØ     ; VERT. MAX.+1
5ØØ7 Ø3           REPT      BYT 3       ; REPEAT BYTES
5ØØ8 2Ø           BMPG      BYT $2Ø     ; BIT MAP PAGE #
5ØØ9 Ø4           SCPG      BYT $Ø4     ; SCREEN PAGE #
5ØØA D8           CLPG      BYT $D8     ; COLOR PAGE #
5ØØB ØØ           PTYPE     BYT $ØØ     ; PRINTER
                ; Ø = NEC/C.ITOH         ; TYPE —
                ; 1 = EPSON TYPE
5ØØC Ø6           SECADR    BYT $Ø6     ; SECONDARY
                ; (TRANSPARENT)          ; ADDR
5ØØD ØØ           INTERF    BYT $ØØ     ; INTERFACE
                ; Ø = CONNECTION         ; TYPE —
                ; 1 = OTHER
5ØØE Ø2           MODE      BYT $Ø2     ; MODE TYPE
                ;
                ; MODE Ø = NORMAL HIRES B/W
                ;      1 = INVERTED HIRES B/W
                ;      2 = MULTI-COLOR
                ;      3 = HIRES COLOR
                ;
5ØØF ØD           GSETUP    BYT $ØD     ;SET UP CARR RET
5Ø1Ø 2Ø           SP1       BYT $2Ø     ;AND 4 SPACES
5Ø11 2Ø           SP2       BYT $2Ø     ;FOLLOWED BY
5Ø12 2Ø           SP3       BYT $2Ø     ;THE NEC/C.ITOH
5Ø13 2Ø           SP4       BYT $2Ø     ;REQUIRED
5Ø14 1B           ESC       BYT $1B     ;GRAPHIC CONTROL
5Ø15 53           ES        BYT $53     ;SEQUENCE—
5Ø16 3Ø           N1        BYT $3Ø     ; ESC, S, N1, N2,
5Ø17 36           N2        BYT $36     ; N3, N4 WHERE
5Ø18 3Ø           N3        BYT $3Ø     ; N'S ARE 4 DIG.
5Ø19 3Ø           N4        BYT $3Ø     ; BYTE COUNT
                ;
5Ø1A ØD           ESETUP    BYT $ØD     ;SET UP CARR RET
5Ø1B 2Ø           ESP1      BYT $2Ø     ;AND 4 SPACES
5Ø1C 2Ø           ESP2      BYT $2Ø     ;FOLLOWED BY
5Ø1D 2Ø           ESP3      BYT $2Ø     ;THE EPSON
5Ø1E 2Ø           ESP4      BYT $2Ø     ;REQUIRED
5Ø1F 1B           EESC      BYT $1B     ;GRAPHIC CONTROL
5Ø2Ø 4B           EK        BYT $4B     ;SEQUENCE—
5Ø21 9Ø           EN1       BYT $9Ø     ; ESC, K, N1, N2
5Ø22 Ø1           EN2       BYT $Ø1     ;
                ;
5Ø23 1B           SPC       BYT $1B     ;LINE SPACING
5Ø24 54           TEE       BYT $54     ;OF 16/144 INCH
5Ø25 31           NN1       BYT $31     ;FOR C.ITOH/NEC
5Ø26 36           NN2       BYT $36
5Ø27 ØD           RET2      BYT $ØD
                ;
5Ø28 1B           ESPC      BYT $1B     ;LINE SPACING
5Ø29 41           EA        BYT $41     ;OF 8/72 INCH
5Ø2A Ø8           ENN1      BYT $Ø8     ;FOR EPSON TYPE
5Ø2B ØD           ERET2     BYT $ØD
                ;
ØØFD              PL        EQU $FD     ;MEMORY USED FOR
ØØFE              PH        EQU $FE     ;INDIRECT
                ;                        POINTERS
5Ø2C ØØ           DATA      BYT Ø       ;MEMORY REGISTERS
5Ø2D ØØ           VBYT      BYT Ø       ;USED IN THIS
5Ø2E ØØ           HBYT      BYT Ø       ;PROGRAM
5Ø2F ØØ           NBYT      BYT Ø
5Ø3Ø ØØ           TBYT      BYT Ø
5Ø31 ØØ           NIBL      BYT Ø
5Ø32 ØØ           DATAXX    BYT Ø
5Ø33 ØØ           DATAYY    BYT Ø
5Ø34 ØØ           DATATM    BYT Ø
5Ø35 ØØ           COLORB    BYT Ø
5Ø36 ØØ           SCREEN    BYT Ø
5Ø37 ØØ           ETEMP1    BYT Ø
5Ø38 ØØ           ETEMP2    BYT Ø
                ;
ØØ71              GFILE     EQU $71     ;PRINTER FILE #
                ;
FFCC              CLRCHN    EQU $FFCC   ;KERNAL ROUTINES
FFC3              CLOSE     EQU $FFC3
FFBA              SETLFS    EQU $FFBA
FFBD              SETNAM    EQU $FFBD
FFCØ              OPEN      EQU $FFCØ
FFC9              CHKOUT    EQU $FFC9
                ;
5Ø39 2Ø 21 52   GSTART    JSR SETUP   ;OPEN PORT, ETC.
5Ø3C AD Ø4 5Ø             LDA MAXH
5Ø3F 8D 2E 5Ø             STA HBYT    ;INIT. WIDTH
5Ø42 A9 ØØ                LDA #$ØØ
5Ø44 8D 31 5Ø             STA NIBL    ;FIRST NIBBLE
5Ø47 AD Ø5 5Ø   LOOPH     LDA MINV
5Ø4A 8D 2D 5Ø             STA VBYT    ;INIT. HEIGHT
5Ø4D AØ ØØ                LDY #$ØØ
5Ø4F AD ØB 5Ø   OUTNUM    LDA PTYPE     ;PRINTER TYPE
5Ø52 DØ ØD                BNE OUTN2
5Ø54 B9 ØF 5Ø   OUTN1     LDA GSETUP,Y  ;OUTPUT
5Ø57 2Ø CA F1             JSR $F1CA     ;GRAPHIC
5Ø5A C8                   INY           ;CONTROL CODES
5Ø5B CØ ØB                CPY #$ØB      ;FOR 1 LINE
5Ø5D DØ F5                BNE OUTN1     ;11 BITS
5Ø5F FØ ØB                BEQ LOOPV
5Ø61 B9 1A 5Ø   OUTN2     LDA ESETUP,Y  ;OUTPUT
5Ø64 2Ø CA F1             JSR $F1CA     ;GRAPHIC
5Ø67 C8                   INY           ;CONTROL CODES
5Ø68 CØ Ø9                CPY #$Ø9      ;FOR 1 LINE
5Ø6A DØ F5                BNE OUTN2     ;9 BYTES
5Ø6C AD Ø7 5Ø   LOOPV     LDA REPT
5Ø6F 8D 2F 5Ø             STA NBYT    ;INIT. COUNTER
5Ø72 A9 ØØ                LDA #$ØØ
5Ø74 8D 3Ø 5Ø             STA TBYT    ;RIGHT BYTE
5Ø77 2Ø B4 51             JSR DATACL
5Ø7A 8D 2C 5Ø             STA DATA
5Ø7D AD 2C 5Ø   LOOPN     LDA DATA
5Ø8Ø 29 Ø3                AND #$Ø3    ;ØØØØØØ11
5Ø82 2Ø ØB 51             JSR DATACO  ;CONVERT TO
5Ø85 29 ØF                AND #$ØF    ;4 BITS
5Ø87 8D 34 5Ø             STA DATATM  ;HOLD IT
5Ø8A AD 2C 5Ø             LDA DATA
```

```
508D 29 0C              AND #$0C   ;00001100
508F 4A                 LSR A
5090 4A                 LSR A
5091 20 0B 51           JSR DATACO ;4 MORE BITS
5094 0A                 ASL A
5095 0A                 ASL A
5096 0A                 ASL A
5097 0A                 ASL A
5098 0D 34 50           ORA DATATM ;COMBINE 8 BITS
509B 20 DB 50           JSR CHKREV ;CHECK IF REVERSE
509E 20 CA F1           JSR $F1CA  ;OUTPUT BYTE
50A1 CE 2F 50           DEC NBYT   ;END OF REPEAT?
50A4 F0 0B              BEQ NEND
50A6 AD 30 50           LDA TBYT
50A9 49 01              EOR #$01   ;TOGGLE BYTE #
50AB 8D 30 50           STA TBYT
50AE 18                 CLC
50AF 90 CC              BCC LOOPN  ;CONTINUE REPEAT
50B1 EE 2D 50   NEND    INC VBYT
50B4 AD 2D 50           LDA VBYT
50B7 CD 06 50           CMP MAXV   ;END OF VERT.?
50BA D0 B0              BNE LOOPV  ;CONTINUE VERT.
50BC AD 31 50           LDA NIBL
50BF 49 01              EOR #$01   ;TOGGLE NIBBLE
50C1 8D 31 50           STA NIBL
50C4 AD 31 50           LDA NIBL
50C7 D0 0F              BNE TOLPH
50C9 CE 2E 50           DEC HBYT
50CC AD 2E 50           LDA HBYT
50CF CD 03 50           CMP MINH
50D2 D0 04              BNE TOLPH
50D4 20 98 52           JSR SETDWN ;UNDO SETUP
50D7 60                 RTS
50D8 4C 47 50   TOLPH   JMP LOOPH  ;BRANCH TOO LONG
                ;
50DB 8D 37 50   CHKREV  STA ETEMP1
50DE 8D 38 50           STA ETEMP2
50E1 AD 0B 50           LDA PTYPE  ;IF PRINTER IS
50E4 F0 1B              BEQ PCR    ;EPSON, THEN
50E6 A9 00              LDA #$00   ;REVERSE DOT
50E8 8D 38 50           STA ETEMP2 ;ORDER
50EB A0 08              LDY #$08
50ED B9 F2 52   EP1     LDA TABBIT-1,Y
50F0 2D 37 50           AND ETEMP1
50F3 F0 09              BEQ EP2
50F5 B9 FA 52           LDA TABTIB-1,Y
50F8 0D 38 50           ORA ETEMP2
50FB 8D 38 50           STA ETEMP2
50FE 88         EP2     DEY
50FF D0 EC              BNE EP1
5101 AD 38 50   PCR     LDA ETEMP2 ;IF BIT CODE
5104 C9 0D              CMP #$0D   ;IS SAME AS
5106 D0 02              BNE PRET   ;CARR RETURN,
5108 A9 0B              LDA #$0B   ;CHANGE IT
510A 60         PRET    RTS
                ;
510B AA         DATACO  TAX        ;X = 2 BITS
510C AD 0E 50           LDA MODE
510F C9 02              CMP #$02   ;< 2?
5111 B0 0B              BCS D0     ;NO, GO ON
5113 BD DE 52   ZERONE  LDA HICOD,X   ;YES, 0 OR 1
5116 AE 0E 50           LDX MODE
5119 F0 02              BEQ D1
511B 49 0F              EOR #$0F   ;INVERT GRAPHICS
511D 60         D1      RTS
511E C9 03      D0      CMP #$03   ;MODE 3?
5120 F0 33              BEQ HIR0   ;YES, HIRES COLOR
5122 E0 00      MULTI   CPX #$00   ;TWO BITS = 00?
5124 D0 06              BNE ONE
5126 AD 21 D0           LDA $D021  ;COLOR IN $D021
5129 18                 CLC
512A 90 0F              BCC ONETWO
512C E0 03      ONE     CPX #$03   ;TWO BITS = 11?
512E F0 1F              BEQ THREE
5130 AD 36 50           LDA SCREEN ;TWO BITS = 10
5133 E0 02              CPX #$02
5135 F0 04              BEQ ONETWO
5137 4A         HINIB   LSR A
5138 4A                 LSR A
5139 4A                 LSR A      ;HIGH NIBBLE
513A 4A                 LSR A      ;CONTAINS COLOR
513B 29 0F      ONETWO  AND #$0F
513D AA                 TAX
513E BD BE 52           LDA TABCOL,X  ;GET SHADE #
5141 AA         GETCOD  TAX
5142 BD CE 52           LDA TABCOD,X  ;GET CODE
5145 AE 30 50           LDX TBYT
5148 F0 04              BEQ DATAE  ;ALTERNATE LOW
514A 4A                 LSR A      ;AND HIGH
514B 4A                 LSR A      ;NIBBLES OF
514C 4A                 LSR A      ;CODE
514D 4A                 LSR A
514E 60         DATAE   RTS
514F AD 35 50   THREE   LDA COLORB ;COLOR IN COLOR
5152 18                 CLC        ;MEMORY
5153 90 E6              BCC ONETWO
5155 E0 00      HIR0    CPX #$00   ;BITS 00
5157 D0 06              BNE HIR3
5159 AD 36 50           LDA SCREEN ;USE LOWER
515C 4C 3B 51           JMP ONETWO ;NIBBLE
515F E0 03      HIR3    CPX #$03   ;BITS 11
5161 D0 06              BNE HIR2
5163 AD 36 50           LDA SCREEN ;USE UPPER
5166 4C 37 51           JMP HINIB  ;NIBBLE
5169 E0 02      HIR2    CPX #$02   ;BITS 10
516B D0 1B              BNE HIR1
516D AD 36 50           LDA SCREEN ;GET UPPER
5170 20 37 51           JSR HINIB
5173 20 A3 51           JSR HIRC
5176 0A                 ASL A      ;DATA IN BITS
5177 0A                 ASL A      ;----**--
5178 8D 32 50           STA DATAXX
517B AD 36 50           LDA SCREEN
517E 20 3B 51           JSR ONETWO ;GET LOWER
5181 20 A3 51           JSR HIRC   ;------**
5184 0D 32 50           ORA DATAXX ;COMBINE
5187 60                 RTS
5188 AD 36 50   HIR1    LDA SCREEN ;BITS 01
518B 20 3B 51           JSR ONETWO ;GET UPPER
518E 20 A3 51           JSR HIRC
5191 0A                 ASL A      ;DATA BITS
5192 0A                 ASL A      ;----**--
5193 8D 32 50           STA DATAXX
5196 AD 36 50           LDA SCREEN
5199 20 37 51           JSR HINIB  ;GET LOWER
519C 20 A3 51           JSR HIRC   ;------**
519F 0D 32 50           ORA DATAXX ;COMBINE
51A2 60                 RTS
                ;
51A3 48         HIRC    PHA        ;THIS ROUTINE
51A4 29 03              AND #$03   ;AVERAGES THE
51A6 8D 33 50           STA DATAYY ;THE BITS
                ;
51A3 48         HIRC    PHA        ;THIS ROUTINE
51A4 29 03              AND #$03   ;AVERAGES THE
51A6 8D 33 50           STA DATAYY ;THE BITS
51A9 68                 PLA        ;------**
51AA 4A                 LSR A      ;AND
51AB 4A                 LSR A      ;----**--
51AC 29 03              AND #$03
```

```
51AE 18                 CLC
51AF 6D 33 5Ø           ADC DATAYY
51B2 4A                 LSR A       ;DIVIDE BY 2
51B3 6Ø                 RTS
                ;
51B4 AD 2D 5Ø   DATACL  LDA VBYT    ;GET MEMORY
51B7 4A                 LSR A
51B8 4A                 LSR A
51B9 4A                 LSR A
51BA AA                 TAX
51BB BD FC 54           LDA HCTAB,X
51BE 85 FE              STA PH
51CØ BD E3 54           LDA LCTAB,X
51C3 18                 CLC
51C4 6D 2E 5Ø           ADC HBYT
51C7 85 FD              STA PL
51C9 9Ø Ø2              BCC CL3
51CB E6 FE              INC PH
51CD A5 FE      CL3     LDA PH
51CF 48                 PHA
51DØ 18                 CLC
51D1 6D Ø9 5Ø           ADC SCPG
51D4 85 FE              STA PH
51D6 AØ ØØ              LDY #$ØØ
51D8 B1 FD              LDA (PL),Y
51DA 8D 36 5Ø           STA SCREEN ;SCREEN MEMORY
                ;
51DD 68                 PLA
51DE 18                 CLC
51DF 6D ØA 5Ø           ADC CLPG
51E2 85 FE              STA PH
51E4 B1 FD              LDA (PL),Y
51E6 8D 35 5Ø           STA COLORB ;COLOR MEMORY
                ;
51E9 AC 2E 5Ø           LDY HBYT
51EC AE 2D 5Ø           LDX VBYT
51EF BD Ø3 53           LDA LTAB,X
51F2 85 FD              STA PL
51F4 BD CB 53           LDA HTAB,X
51F7 85 FE              STA PH
51F9 B9 93 54           LDA LTABA,Y
51FC 18                 CLC
51FD 65 FD              ADC PL
51FF 85 FD              STA PL
52Ø1 9Ø Ø2              BCC CL1
52Ø3 E6 FE              INC PH
52Ø5 B9 BB 54   CL1     LDA HTABA,Y
52Ø8 18                 CLC
52Ø9 65 FE              ADC PH
52ØB 85 FE              STA PH
52ØD 18                 CLC
52ØE 6D Ø8 5Ø           ADC BMPG
5211 85 FE              STA PH
5213 AØ ØØ              LDY #$ØØ
5215 B1 FD              LDA (PL),Y
5217 AE 31 5Ø           LDX NIBL
521A FØ Ø4              BEQ CL2
521C 4A                 LSR A
521D 4A                 LSR A
521E 4A                 LSR A
521F 4A                 LSR A       ;ACCUM = BIT MAP
5220 6Ø         CL2     RTS         ;BYTE
                ;
5221 A9 71      SETUP   LDA #GFILE
5223 2Ø C3 FF           JSR CLOSE
5226 AD ØD 5Ø           LDA INTERF
5229 DØ 31              BNE SET2
522B A9 71              LDA #GFILE  ;FOR CONNECTION,
522D AØ ØØ              LDY #$ØØ    ;WIDTH MUST BE
522F A2 Ø4              LDX #$Ø4    ;SET TO ZERO TO
5231 2Ø BA FF           JSR SETLFS ;TO AVOID EXTRA
5234 A9 ØØ              LDA #$ØØ    ;CARR RETURNS
5236 2Ø BD FF           JSR SETNAM
5239 2Ø CØ FF           JSR OPEN
523C BØ 56              BCS GCLOSE
523E A2 71              LDX #GFILE
5240 2Ø C9 FF           JSR CHKOUT
5243 A9 1B              LDA #$1B
5245 2Ø CA F1           JSR $F1CA
5248 A9 57              LDA #$57
524A 2Ø CA F1           JSR $F1CA
524D A9 ØØ              LDA #$ØØ
524F 2Ø CA F1           JSR $F1CA
5252 A9 ØD              LDA #$ØD
5254 2Ø CA F1           JSR $F1CA
5257 A9 71              LDA #GFILE
5259 2Ø C3 FF           JSR CLOSE
525C A9 71      SET2    LDA #GFILE
525E AC ØC 5Ø           LDY SECADR
5261 A2 Ø4              LDX #$Ø4
5263 2Ø BA FF           JSR SETLFS
5266 A9 ØØ              LDA #$ØØ
5268 2Ø BD FF           JSR SETNAM
526B 2Ø CØ FF           JSR OPEN
526E BØ 24              BCS GCLOSE
5270 A2 71              LDX #GFILE
5272 2Ø C9 FF           JSR CHKOUT
5275 AØ ØØ              LDY #$ØØ
5277 AD ØB 5Ø           LDA PTYPE
527A DØ ØC              BNE OUTSP2
527C B9 23 5Ø   OUTSP   LDA SPC,Y
527F 2Ø CA F1           JSR $F1CA
5282 C8                 INY
5283 CØ Ø5              CPY #$Ø5
5285 DØ F5              BNE OUTSP
5287 6Ø                 RTS
5288 B9 28 5Ø   OUTSP2  LDA ESPC,Y
528B 2Ø CA F1           JSR $F1CA
528E C8                 INY
528F CØ Ø4              CPY #$Ø4
5291 DØ F5              BNE OUTSP2
5293 6Ø                 RTS
5294 2Ø 98 52   GCLOSE  JSR SETDWN
5297 6Ø                 RTS
                ;
5298 A9 ØD      SETDWN  LDA #$ØD    ;CARR RETURN
529A 2Ø CA F1           JSR $F1CA
529D A9 ØC              LDA #$ØC    ;FORM FEED
529F 2Ø CA F1           JSR $F1CA
52A2 A9 1B              LDA #$1B    ;LINE SPACING
52A4 2Ø CA F1           JSR $F1CA   ;BACK TO 1/6 IN.
52A7 AD ØB 5Ø           LDA PTYPE
52AA DØ Ø4              BNE EPCL
52AC A9 41              LDA #$41    ;ESC A FOR NEC/
52AE DØ Ø2              BNE LSPC    ; OR C. ITOH
52BØ A9 32      EPCL    LDA #$32    ;ESC 2 FOR
52B2 2Ø CA F1   LSPC    JSR $F1CA   ; EPSON
52B5 2Ø CC FF           JSR CLRCHN
52B8 A9 71              LDA #GFILE
52BA 2Ø C3 FF           JSR CLOSE
52BD 6Ø                 RTS
                ;
52BE ØF  TABCOL   BYT 15,Ø,11,3,1Ø,7,12,1
52C6 Ø8           BYT 8,14,5,13,9,2,6,4
52CE ØØ  TABCOD   BYT $ØØ,$2Ø,$Ø4,$28
52D2 ØA           BYT $ØA,$25,$4A,$A5
52D6 69           BYT $69,$87,$2D,$A7
52DA 6D           BYT $6D,$DB,$9F,$FF
52DE ØØ  HICOD    BYT $ØØ,$Ø3,$ØC,$ØF
52E2 28  AUTHOR   BYT '(C) M.KERYAN 1984'
```

unexplainable reason, my printer-interface would print two $0D patterns for every one sent, messing up the 600 byte counter. Instead of tracking down the reason for this, I eliminated any chance for this glitch to occur.

At the beginning of every line a carriage return is sent, followed by 4 spaces (to center the drawing), then a code is sent to set up the printer to accept the correct number of graphic characters (600 or 400 as explained above). These are the labeled GSETUP and ESETUP.

Subroutine DATACL returns the contents of three memory cells, based on the current horizontal and vertical coordinates: the SCREEN memory, the COLOR memory and the bit-map memory in the accumulator. To avoid confusing calculations and to speed things up a bit, lookup tables are used extensively in this routine.

Subroutine DATACO is entered with the lower two bits of the accumulator equal to two bits from the bit-map memory. When finished, this routine returns with a four bit matrix pattern that eventually gets sent as half of a byte to the printhead. This routine works differently for the four modes of operation. In modes 0 and 1, simple 4 bit patterns duplicate (or invert) the original 2 bit sequence. In modes 2 and 3, the correct colors are determined. Then unique patterns are found through lookup tables TABCOL and TABCOD. Note that each of the 16 colors are associated with two different 4 bit patterns--the high and low nibbles of TABCOD. These two different codes are alternately used when the same byte is repeated to avoid vertical lines on the printed.

After the picture is printed, SETDWN sends a carriage return and a form feed to the printer and then changes the line spacing back to 1/6 inch for normal printer operation.

GDUMP can be run by your BASIC programs by POKEing the required set-up parameters into the area in the beginning of the program, then SYS 20480. Next month we'll continue this series by adding another small machine language program and a BASIC program that will allow GDUMP to print pictures made from SIMONS' BASIC, ULTRABASIC-64, DOODLE, KOALA-PAINTER and TPUG's SLIDESHOW. For those of you who don't have an Assembler to enter GDUMP, MICRO will provide these programs on 1541 disks for $15 (US). Order MicroDisk No. MD-4.

MICRO™

```
52F3 80 40 20   TABBIT   BYT $80,$40,$20,$10,$08,$04,$02,$01
52FB 01 02 04   TABTIB   BYT $01,$02,$04,$08,$10,$20,$40,$80
5303 00 01 02   LTAB     BYT $00,$01,$02,$03,$04,$05,$06,$07
530B 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
5313 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
531B C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
5323 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
532B 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
5333 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
533B C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
5343 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
534B 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
5353 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
535B C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
5363 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
536B 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
5373 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
537B C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
5383 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
538B 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
5393 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
539B C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
53A3 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
53AB 40 41 42            BYT $40,$41,$42,$43,$44,$45,$46,$47
53B3 80 81 82            BYT $80,$81,$82,$83,$84,$85,$86,$87
53BB C0 C1 C2            BYT $C0,$C1,$C2,$C3,$C4,$C5,$C6,$C7
53C3 00 01 02            BYT $00,$01,$02,$03,$04,$05,$06,$07
53CB 00 00 00   HTAB     BYT $00,$00,$00,$00,$00,$00,$00,$00
53D3 01 01 01            BYT $01,$01,$01,$01,$01,$01,$01,$01
53DB 02 02 02            BYT $02,$02,$02,$02,$02,$02,$02,$02
53E3 03 03 03            BYT $03,$03,$03,$03,$03,$03,$03,$03
53EB 05 05 05            BYT $05,$05,$05,$05,$05,$05,$05,$05
53F3 06 06 06            BYT $06,$06,$06,$06,$06,$06,$06,$06
53FB 07 07 07            BYT $07,$07,$07,$07,$07,$07,$07,$07
5403 08 08 08            BYT $08,$08,$08,$08,$08,$08,$08,$08
540B 0A 0A 0A            BYT $0A,$0A,$0A,$0A,$0A,$0A,$0A,$0A
5413 0B 0B 0B            BYT $0B,$0B,$0B,$0B,$0B,$0B,$0B,$0B
541B 0C 0C 0C            BYT $0C,$0C,$0C,$0C,$0C,$0C,$0C,$0C
5423 0D 0D 0D            BYT $0D,$0D,$0D,$0D,$0D,$0D,$0D,$0D
542B 0F 0F 0F            BYT $0F,$0F,$0F,$0F,$0F,$0F,$0F,$0F
5433 10 10 10            BYT $10,$10,$10,$10,$10,$10,$10,$10
543B 11 11 11            BYT $11,$11,$11,$11,$11,$11,$11,$11
5443 12 12 12            BYT $12,$12,$12,$12,$12,$12,$12,$12
544B 14 14 14            BYT $14,$14,$14,$14,$14,$14,$14,$14
5453 15 15 15            BYT $15,$15,$15,$15,$15,$15,$15,$15
545B 16 16 16            BYT $16,$16,$16,$16,$16,$16,$16,$16
5463 17 17 17            BYT $17,$17,$17,$17,$17,$17,$17,$17
546B 19 19 19            BYT $19,$19,$19,$19,$19,$19,$19,$19
5473 1A 1A 1A            BYT $1A,$1A,$1A,$1A,$1A,$1A,$1A,$1A
547B 1B 1B 1B            BYT $1B,$1B,$1B,$1B,$1B,$1B,$1B,$1B
5483 1C 1C 1C            BYT $1C,$1C,$1C,$1C,$1C,$1C,$1C,$1C
548B 1E 1E 1E            BYT $1E,$1E,$1E,$1E,$1E,$1E,$1E,$1E
5493 00 08 10   LTABA    BYT $00,$08,$10,$18,$20,$28,$30,$38
549B 40 48 50            BYT $40,$48,$50,$58,$60,$68,$70,$78
54A3 80 88 90            BYT $80,$88,$90,$98,$A0,$A8,$B0,$B8
54AB C0 C8 D0            BYT $C0,$C8,$D0,$D8,$E0,$E8,$F0,$F8
54B3 00 08 10            BYT $00,$08,$10,$18,$20,$28,$30,$38
54BB 00 00 00   HTABA    BYT $00,$00,$00,$00,$00,$00,$00,$00
54C3 00 00 00            BYT $00,$00,$00,$00,$00,$00,$00,$00
54CB 00 00 00            BYT $00,$00,$00,$00,$00,$00,$00,$00
54D3 00 00 00            BYT $00,$00,$00,$00,$00,$00,$00,$00
54DB 01 01 01            BYT $01,$01,$01,$01,$01,$01,$01,$01
54E3 00 28 50   LCTAB    BYT $00,$28,$50,$78,$A0,$C8,$F0,$18
54EB 40 68 90            BYT $40,$68,$90,$B8,$E0,$08,$30,$58
54F3 80 A8 D0            BYT $80,$A8,$D0,$F8,$20,$48,$70,$98
54FB C0                  BYT $C0
54FC 00 00 00   HCTAB    BYT $00,$00,$00,$00,$00,$00,$00,$01
5504 01 01 01            BYT $01,$01,$01,$01,$01,$02,$02,$02
550C 02 02 02            BYT $02,$02,$02,$02,$03,$03,$03,$03
5514 03                  BYT $03
5515                     END
```

INTERFACE CLINIC: *Communication Between Different Computers*

How to merge several computers into one efficient system

by Ralph Tenny

A few columns ago I answered a letter query about communication between different computers. Here's another example: I have two Radio Shack Color Computers and one Commodore 64, but only one printer (EPSON MX-80). The 64K Color Computer is in use constantly, mostly as a word processor; the 32K (home brew) Color Computer is usually idle. Both computer systems (computer, disk, cassette and display) are plugged into separate power strips. Thus, each system is individually controllable. In order to drive the printer from the Color Computer using standard software, the EPSON switch SW2 needs to be set to 0000. For the Commodore, using a "The Connection" serial interface, the settings must be 0010. Thus, whenever I print from the other computer, I must move the printer power cord to the other power strip, open the printer case and move one switch, and connect the other drive cable. The C-64 printer interface has a 2K buffer, but the Color Computer interface has no buffer. All my writing is done using ELITE*WORD, and I often must wait for one file to print out before working on another.

Obviously, things would go better if I had a large printer buffer to capture several pages of data and print it while I work on another file. Figure 1 shows how to merge my existing computers into a single, more efficient system. The printer and the 32K CoCo will be powered from a third power strip which turns on when either or both the other systems are active. A special interface board for the CoCo will have a serial input from the 64K CoCo printer port and a parallel input from the C-64 system. A separate parallel output will drive the printer. Either computer will be able to direct output to the printer. If the printer is busy, the requesting computer will have to wait as usual. I expect that 28K of memory would be available in the 32K CoCo after allowing for display memory, stack and controller program workspace. 28K of buffer is enough for more than 15 pages of double-spaced text, which exceeds any need I have had so far.

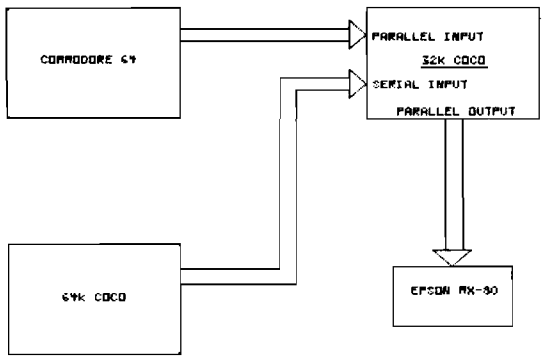

Figure 1. A special network connection will allow two computers to feed a third computer which will serve as a printer buffer.

Let me share some of my philosophy used in designing this system. Three primary considerations were involved: first, the new system should be compatible with commercial software running on both the 64K CoCo and the C-64. Primarily, that means no special printer drivers will be written for any commercial software. Second, the expansion will be modular. As I complete some part of the task, an improvement in system efficiency will result. Finally, no internal modifications will be made to either the 64K CoCo or the C-64. All these considerations are met by the (apparently) clumsy plan to configure the 32K CoCo interface to respond to either of the other computers as if it were a printer. That is, the input interfaces will handshake with the driver computers exactly as does the existing printer interface. Software options for straight-through printing or formatting by the 32K CoCo will be written.

At some future time, I may consider eliminating the "Connection" interface; most commercial software uses the Commodore serial port. To eliminate this interface would require hours of experimentation and study, designing an interface to convert from Commodore serial to RS-232 format, and there isn't time or need for that. The C-64 claims to have an RS-232 serial port available, but this requires a special output interface. Also, much commercial software for the C-64 does not support this port which is implemented by simulating a 6850 ACIA in software. Finally, the data transfer rate of the serial port is faster than the RS-232 transfer rate.

I am beginning to implement this printer buffer system as outlined above.

Due to various time pressures, the conversion will need to be made in several phases. Each phase will be reported in the column as the work is performed. A separate problem had to be solved first. The 32K CoCo must be capable of booting (starting up) unaided, so it must have an autostart ROM in the expansion (cartridge) port. I have an EPROM programmer for the C-64, along with 6502 development software which will handle the Commodore programming required. My 6809 development software has no way to send 6809 code to the C-64 programmer. The temporary link between the CoCo and the C-64 is presented this month; probably, the CoCo expansion interface will follow next month.

The simplest way to transfer data between dissimilar computers is to use a standard data rate and interface at the transmitting computer. If the software and hardware at the receiving computer is fast enough to capture the data as it comes, no handshake is needed. For this one-way data flow, the CoCo/C-64 interface can be a one-transistor level translator and inverter (Figure 2). R1 and D1 limit base drive to Q1, while Q1 and R2 drive PB7 of the Commodore User Port. The CoCo printer port incorporates a BUSY* signal, so a third wire is needed to feed back a high level ("not busy") to the serial in-line.

The program listing is a rudimentary data input program which services the interface of Figure 2. Figure 3 shows the flowchart for the program, which assembles incoming serial data into bytes and saves the data in sequential locations beginning at $2000. Since the C-64 has a timer available, complicated bit timing is not needed. Using a timer means that less experimentation is needed to get the timing correct. Instead of counting down a software loop, the CPU polls the CIA Interrupt Status bit to learn when the timer has finished.

For those who need the review, Figure 4 shows how the 8-bit serial asychronous data is formatted. A Start bit (TTL low level) is sent first, followed by eight data bits which may be either low or high. At least one Stop Bit (high level) is sent to complete the transmission of a single byte. Note that Radio Shack 1.0 BASIC sends only seven bits with one Stop bit; later

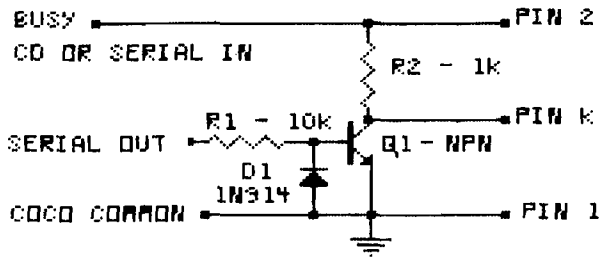

Figure 2. Two resistors, a diode and one transistor make up a data transmitter to send data from the Color Computer to the Commodore 64 (see text).

Announcing... TOTL. MONEYMINDER

FOR THE COMMODORE 64™

The home accounting package that will make your budget, not break it! ONLY $39.95

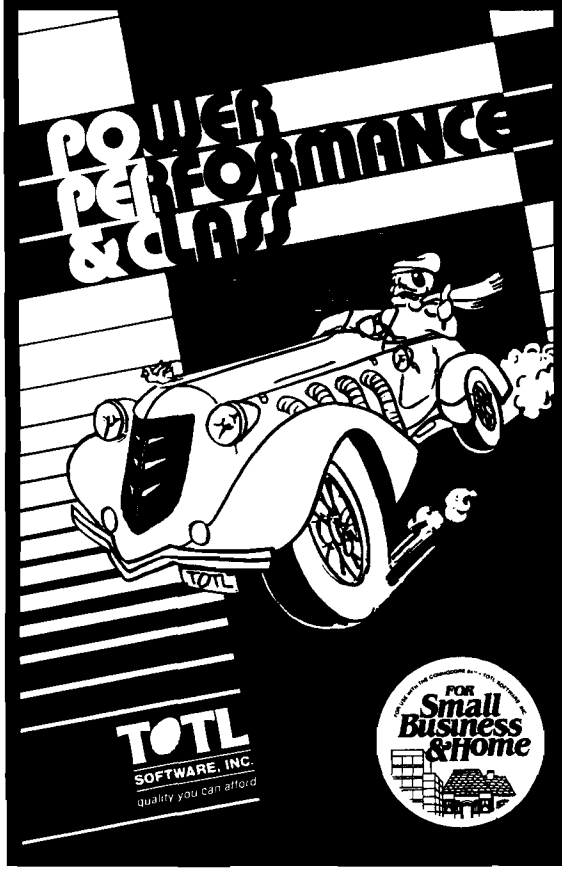

Money-Saving Bonus Paks of 64 Software

(BP-1)—(disk)
totl.text/ totl.speller/totl.label
reg. price $103 NOW **$79**

(BP-2)—(disk)
totl.business/ totl time manager/ totl.infomaster/totl.text
reg. price $228 NOW **$159**

(BP-3)—(disk)
totl.infomaster/ totl.text/totl.speller
reg. price $129 NOW **$99**

(BP-4)—(disk)
totl.text/ totl.speller/ research assistant
reg. price $118 NOW **$89**

(BP-5)—(tape)
totl.text/totl.label
reg. price $60 NOW **$49**

Commodore 64 and VIC 20 are trademarks of Commodore Business Machines Inc.

INFORMATION AND ORDER COUPON

	TAPE	DISK
TOTL.TEXT 2.0 (VIC + 8K)	☐ 24.95	☐ 28.95
TOTL.TEXT 2.5 (VIC + 16K)	☐ 34.95	☐ 38.95
TOTL.LABEL 2.1 (VIC + 16K)	☐ 19.95	☐ 23.95
TOTL TIME MGR. 2.1 (VIC + 8K)	☐ 29.95	☐ 33.95
RESEARCH ASST. 2.0 (VIC + 8K)	☐ 29.95	☐ 33.95
TOTL.BUSINESS 3.0 (VIC + 24K)		☐ 84.95
TOTL.TEXT 2.6 (C-64)	☐ 39.95	☐ 43.95
TOTL.SPELLER 3.6 (-C64)		☐ 34.95
TOTL.LABEL 2.6 (C-64)	☐ 19.95	☐ 23.95
TOTL TIME MGR. 2.6 (C-64)	☐ 34.95	☐ 38.95
RESEARCH ASST. 2.0 (C-64)	☐ 34.95	☐ 38.95
TOTL.INFOMASTER 3.6 (C-64)		☐ 49.95
TOTL.BUSINESS 3.6 (C-64)		☐ 94.95
TOTL.MONEYMINDER 3.6 (C-64)		☐ 39.95
BONUS PAK #_____		_____

Total _____
C.O.D. Charges/Sales Tax _____
Shipping & Handling $3.00
Amount Enclosed _____

Check, Money Order or C.O.D.* also accepted. *C.O.D. orders $2.00 additional (CA residents add 6½% sales tax)

FOR ORDERING ONLY—CALL OUR TOLL FREE NUMBERS
Continental U.S. 1-800-351-1555, California 1-800-351-1551
Hawaii and Alaska 415-943-7877

☐ SEND MORE INFORMATION (no charge for catalog)

Name _____
Street _____
City _____ State _____ Zip _____
Phone ( ) _____ ☐ MC ☐ VISA
Card # _____ Exp. Date _____

TOTL SOFTWARE, INC.

quality you can afford
1555 Third Avenue
Walnut Creek, CA 94596
415/943-7877

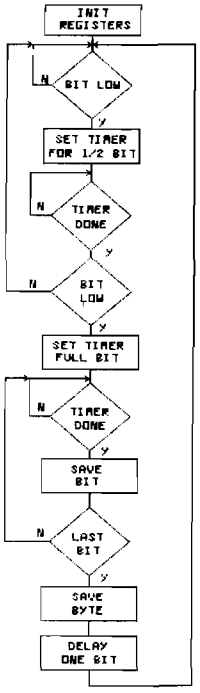

Figure 3. This flow chart describes the program listing for the Commodore to receive data from the Color Computer.



Figure 4. This diagram illustrates a typical binary data byte as transferred by the circuit of Figure 2.

versions send eight data bits and one Stop bit.

Refer to Figure 3 and Listing 2 for the following discussion. **NEW** initializes various locations and the program waits for Bit 7 to go low. **GET** performs a 6502 BIT test which sets the N Flag equal to Bit 7. Until the Start bit takes PB7 low, the BMI test forces the testing to continue. When the Start bit arrives, the half-bit delay is called to be sure the input is still low. This test provides noise rejection only. If the line is still low (valid start bit), INBIT calls a one-bit delay. This allows time for the first data bit to arrive and settle. Next, the incoming data is captured and a test for eight bits received is made. The loop is executed eight times, until **SAVX** becomes zero.

Incoming data appears on PB7. The **LDA BPORT** reads all eight bits, but Bit 7 is stripped off by shifting the bit into the Carry Bit. Then the Carry Bit is shifted into the location named WORD. After eight bits have been received, **DUMP** saves the assembled data byte into the next sequential buffer location and increments the pointer. When the Y Index "rolls over" from $FF to $00, the location **PAGE**, which is the high order byte of the buffer address, is incremented. This way, the transferred data can be as large as necessary up to $8000 (32768) bytes. *Special Note: The listing was assembled at $3000 to avoid destroying the Editor package at $C000. In normal use, this program is intended to reside at $C000, thus providing $8000 bytes of data buffer. Otherwise, only $1000 (4096) bytes of buffer is available with Listing 2.*

SKIP makes sure the CIA Interrupt Status bit is clear before a full-bit delay is called. After the delay, control returns to **FIX** to test for the next Start bit. The delay routine is called once (enter at HLFBIT) for a one-half bit delay, or twice (enter at FULBIT) for a one bit delay. The timer is started and the Timer A Interrupt Status Bit (Bit 0 in the CIA Interrupt Register) is repeatedly polled. When this bit goes high, the timer has timed out, so the RTS causes normal program operation to resume. There is a special caution regarding use of the CIA timers. Timer A can be operated in the free-running mode to allow generation of arbitrary waveforms for special purposes. The one-shot mode, as demonstrated here, should always be used for normal timing. This mode selection is shown controlled by the assignments for **TMRNIT** and **TMROFF**.

This program is intended to be loaded and operated under control of HESMON 64 or another debug monitor; the RESTORE key forces a stop. CoCo can send data using a simple BASIC program. Data integrity can be verified by using another BASIC program to checksum the data in CoCo

Listing 1

```
  5 REM DATA TRANSFER IN BINARY
10 FOR X=49152 TO 49168
20 H0=PEEK(X)
30 PRINT#-2,CHR$(H0);
40 NEXT
42 REM CHECKSUM COMPUTATION
45 AT=1:LM=65536
50 FOR X=49152 TO 49168
60 A=PEEK(X)
70 AT=AT+A
80 IF AT> LM THEN AT=AT-LM
90 NEXT X
100 PRINT''CHECKSUM = '',AT
```

Listing 2

```
                ; THIS PROGRAM IMPLEMENTS A TTL
                ; LEVEL SERIAL INPUT PORT ON THE
                ; COMMODORE 64 COMPUTER WHICH WILL
                ; INPUT AND STORE BINARY DATA
                ;
                ; EQUATES
DD00            APORT   EQU $DD00      ; CIA REGISTERS
DD01            BPORT   EQU APORT+1
DD02            ADDR    EQU APORT+2
DD03            BDDR    EQU APORT+3
DD04            TMRALO  EQU APORT+4
DD05            TMRAHI  EQU APORT+5
DD06            TMRBLO  EQU APORT+6
```

and the same program to checksum the data in C-64 memory. A more "automatic" data transfer would require far more programming, so this simpler approach is a good compromise.

The BASIC program, Listing 1, will transfer binary data between a CoCo and a C-64 and checksum the data at both ends. Lines 10-40 send the data across to the C-64 which receives the data with the program in Listing 2. Compute the CoCo memory checksum before or after sending data by typing "GOTO 45". Lines 45 100 of the same program, entered into the C-64, will compute the checksum after the transmission. Note that line 10 specifies addresses 49152-49168 [$C000-$C010], which happens to be the first 16 bytes of the expansion area [Disk BASIC for CoCo if you have a disk]. Obviously, this could have been any set of locations, as long as the C-64 buffer area is long enough. Note also that line 50 must specify the same addresses as line 10. The C-64 version must use the target addresses set up by the C-64 receive program.

I recommend the following sequence for data transfers using these programs:

1. Connect and test the interface.
2. If data is to be transferred for programming in an EPROM, use HESMON 64 to prepare the buffer area:

   F2000 2FFF FF

This command fills 4096 locations [a full 2732 EPROM] with $FF. Thus, if the code transferred is smaller than 4096 bytes, unused EPROM locations will remain undisturbed.

3. Set up the CoCo by entering the BASIC program. Compute the checksum now or later.
4. Start the receiving program in the C-64 [it will wait on data if the interface is connected] using:

   G3000

5. Type RUN on CoCo.
6. When CoCo prints "BREAK IN 40", hit RESTORE on the C-64.
7. Save the data using this HESMON command: [disk assumed]

   S"filename" 08 2000 2FFF

8. Return to BASIC [C-64] with the HESMON command XC; enter the checksum program and compute the checksum. In case other than HESMON is used, it may be necessary to load the data from disk with an offset to avoid conflicts with BASIC. If the checksum is OK, you are free to program the EPROM.

MICRO™

```
DD07            TMRBHI   EQU APORT+7
DD0D            CIA2IR   EQU APORT+$D
DD0E            TMRACR   EQU APORT+$E
DD0F            TMRBCR   EQU APORT+$F
                ;
                ; CONSTANTS
0009            TMRNIT   EQU $09       ; TIMER ON/ONE SHOT
0008            TMROFF   EQU $08       ; TIMER OFF
002C            BAUDLO   EQU $2C       ; TIMER VALUE FOR
0003            BAUDHI   EQU $03       ; 600 BAUD
                ;
                ; BUFFERS
007C            SAVA     EQU $7C
007E            SAVX     EQU $7E
007F            SAVY     EQU $7F
0080            POINTR   EQU $80       ; DATA BUFFER POINTER
0081            PAGE     EQU POINTR+1  ; BUFFER HI BYTE
0082            WORD     EQU POINTR+2  ; INPUT SCRATCH BYTE
                ;
3000                     ORG $3000
                ; MAIN PROGRAM
3000 A9 08      NEW      LDA #TMROFF   ; INSURE TIMER OFF
3002 8D 0E DD            STA TMRACR
3005 A9 00               LDA #$00      ; INIT DATA POINTER
3007 85 80               STA POINTR    ; LOW BYTE
3009 A8                  TAY           ; AND INDEX POINTER
300A A9 2C               LDA #BAUDLO   ; SET TIMER FOR
300C 8D 04 DD            STA TMRALO    ; HALF-BIT TIME
300F A9 03               LDA #BAUDHI
3011 8D 05 DD            STA TMRAHI
3014 A9 20               LDA #$20      ; INIT DATA POINTER
3016 85 81               STA PAGE      ; HI BYTE
3018 A9 08      FIX      LDA #08       ; INIT BIT COUNTER
301A 85 7E               STA SAVX
301C 78                  SEI           ; KILL C64 INTERRUPTS
301D A9 00               LDA #00       ; INIT INPUT
301F 85 82               STA WORD      ; SCRATCH PAD
                ;
                ; INPUT LOOP
3021 2C 01 DD   GET      BIT BPORT     ; TEST FOR START BIT
3024 30 FB               BMI GET       ; WAIT FOR IT
3026 20 53 30            JSR HLFBIT    ; FOUND IT
3029 2C 01 DD            BIT BPORT     ; WAIT ONE-HALF BIT
302C D0 F3               BNE GET       ; FALSE START BIT?
302E 20 50 30   INBIT    JSR FULBIT    ; SAMPLE NEXT BIT
3031 AD 01 DD            LDA BPORT     ; READ PORT
3034 0A                  ASL A         ; GET INPUT DATA BIT
3035 66 82               ROR WORD      ; ROTATE INTO BUFFER
3037 C6 7E               DEC SAVX      ; COUNT BIT AND
3039 F0 03               BEQ DUMP      ; TEST FOR LAS
303B 4C 2E 30            JMP INBIT     ; GET MORE
303E A5 82      DUMP     LDA WORD      ; SAVE ASSEMBLED
3040 91 80               STA (POINTR),Y     ; DATA
3042 C8                  INY           ; BUMP POINTER
3043 D0 02               BNE SKIP      ; PAGE BOUNDARY?
3045 E6 81               INC PAGE      ; INCREMENT PAGE BIT
3047 AD 0D DD   SKIP     LDA CIA2IR    ; CLEAR STATUS BIT
304A 20 50 30            JSR FULBIT    ; WAIT FOR STOP BIT
304D 4C 18 30            JMP FIX       ; AND CONTINUE
                ;
                ; POLLED TIMER DELAY
3050 20 53 30   FULBIT   JSR HLFBIT    ; TWICE FOR FULL BIT
3053 A9 09      HLFBIT   LDA #TMRNIT   ; START TIMER
3055 8D 0E DD            STA TMRACR
3058 AD 0D DD   TEST     LDA CIA2IR    ; WAIT FOR
305B 29 01               AND #$01      ; STATUS BIT
305D F0 F9               BEQ TEST
305F 60                  RTS           ; RETURN
3060                     END
```

HILISTER - A Study and Teaching Aid *(Part 1)*

Move easily within your programs and highlight parts of text or listings to add emphasis, drama or clarity

by J. Morris Prosser

HiLister is a machine language program which may be called from either Applesoft or the monitor to invert one line at a time on the screen display, thus "highlighting" that line. In addition, an Applesoft program, a block of disassembled memory locations, a disk catalog (either drive), a memory dump (in both hex and ASCII), or almost anything else may be listed to the screen, after which one can jump to the beginning or end of the listing, move forward or backward by screen "pages", scroll either up or down, or step up or down one line at a time. Lines may be highlighted in this mode also.

HiLister began as a simple line inverter, to highlight lines on the screen while teaching a beginner's programming class. The instructor sat at the keyboard and used a separate monitor to show the class what was happening. In order to point out a particular line for discussion, he had to get up and point to it on the monitor. HiLister made it possible for him to remain seated, pointing out the line by causing it to be printed in inverse characters.

At that point, it was possible to highlight only those lines already on the screen display, so I added a list function to allow an entire Applesoft program to be examined with the highlighter. When the list function is in effect, if the highlight is moved to the bottom of the screen and an attempt is made to move it further, the screen scrolls up one line, and the bottom line is again highlighted. A similar action occurs at the top of the screen. The additional functions of jumping to beginning or end, paging, scrolling, and stepping are icing on the cake.

Once the Applesoft list function was in operation, I found that the program was very helpful for studying program listings at any time, rather than being useful only in a teaching situation. It was at this point that I decided to add a list function for machine language disassembly listings.

It also appeared that some other functions might be useful, so I added a command to dump a block of memory to the screen in hex and ASCII and another to allow the listing of long catalogs from either drive. The final step was to add a method of listing other things I had perhaps overlooked.

HiLister is initialized by "BRUN HILISTER" or by "BLOAD HILISTER" and "CALL 3276 8". The initialization consists of setting the ampersand (&) and ctrl-Y vectors. The program is then accessed by entering ctrl-Y from the monitor (for the highlighter function only), or "&" from Applesoft (for all functions). "&LIST" causes the Applesoft program in memory to be listed in its entirety to both the screen and to a buffer area used by HiLister for the list function. Commas or hyphens and beginning and ending addresses may be used as in the standard Applesoft LIST command to obtain a partial listing.

To get a listing of a machine language program or other disassembled machine code, the command is an ampersand followed by a dollar sign and the start address (in hex) of the memory to be disassembled. Thus, "&$8000" would print 256 lines of disassembled code starting at $8000 (a partial listing of HiLister, for example). "&$8000L" would produce the same result. Addition of a plus sign

after the address (for example, &$8000) causes 512 lines of disassembled code to be listed. Note that "&$8000L" would produce only 256 lines of code, since the program looks for only one character following the address.

To obtain a memory dump, the command is "&$" followed by the range of memory to be dumped. For example, "&$8000.84FF" would dump the range $8000 to $84FF, just as in the normal monitor command.

Disk catalogs are listed by using the command "$C" for the default drive, or "&C1" or "&C2" to specify the drive.

To list anything else to the program buffer, use "&B" to initialize the output detour and the buffer, then list or print whatever is desired, then enter the HiLister program with "&E".

While the program is listing to the screen and buffer, ctrl-S and ctrl-C may be used to pause and end the listing, respectively, just as with the normal Applesoft LIST command. Note, however, that ctrl-C is not effective in a catalog listing.

If a program is too long to be completely listed to the buffer, the bell sounds and a message is displayed offering the options of using the part of the program already listed or leaving the HiLister program and re-entering it with only an elected part of the program to be listed. The buffer normally starts at $4000, so an Applesoft program of more than 57 sectors would overwrite it. The Applesoft program length is checked by HiLister, however, and if necessary the start of the buffer is moved up in memory. In this event, of course, the buffer size is decreased and it will not hold as long a listing.

Applesoft programs of this length or longer may be too long for complete listing. For very long programs it is better to load the program, delete those lines not required for study, and then invoke the list function of HiLister. This will provide for a larger buffer and make the maximum number of lines available for study. Note that an Applesoft program longer than 120 sectors will overwrite the HiLister program itself. In this case it is possible to load the Applesoft program, delete part of it, then BRUN HILISTER.

The assembly listing for HiLister is quite long and is liberally commented, so only a brief description of how the program works will be provided here (Listing 1).

Upon first running the program, the ampersand and ctrl-Y vectors are set up and control is returned to BASIC. Upon entry to the main program, the program determines whether the highlighter alone is requested, or one of the other options is desired. If a listing is required, the program sets the output vector (subroutine OUTSET) to cause all output to pass through the program, so that it may be listed to the buffer as well as to the screen. It also fills the buffer with carriage returns so there will be no extraneous material at the end of the listing. If an Applesoft listing, the program goes to a portion of code which replaces the standard Applesoft "LIST" routine. The standard routine could not be used, since it does not normally return to the caller and, in addition, some special formatting was required.

If a disassembly listing is requested, the program determines the start address for the listing, then checks to see whether 256 or 512 lines should be listed. This is done in subroutine "MEMLST," which also checks to see whether "DEF" is part of the address entered. The reason this is needed is that Applesoft would interpret this as the beginning of a "DEF FN" command, and so would replace it with the token for "DEF" ($B8). If this happens, the "DEF" address must be restored so the listing will start at the correct address. While this situation will seldom arise, I thought it should be covered.

MEMLST also checks to determine if a memory dump is desired rather than a disassembly listing. It does this by looking for a period between addresses.

When all is well, if a disassembly listing is requested, the program goes to "MONLIST," which replaces the monitor "LIST2" subroutine. It is called twice if 512 lines are to be listed.

If a memory dump is required, the program jumps to "DUMP," which performs a function similar to the "XAM" function in the monitor, with the added feature that the hex code is converted to ASCII and shown at the same time. Control (non-printing) characters are shown as blanks.

If a catalog listing has been requested, the program jumps to "CTLG," which first removes the pause from the DOS CATALOG routine, then calls it. When the catalog

Listing 1

```
0800            *   HILISTER1     (REV  04/16/84)
0800            *
0800            *      Written by
0800            *
0800            *   J. Morris Prosser
0800            *
0006            LINE     EQU $06       ;LINE NUMBER FOR HIGHLIGHTER
0007            TEMPY    EQU $07       ;TEMPORARY STORAGE FOR Y REGISTER
0009            TEMPX    EQU $09       ;TEMPORARY STORAGE FOR X REGISTER
0019            FLAG     EQU $19       ; FLAG FOR USE BY HIGHLIGHTER
001A            LSTFLG   EQU $1A       ; A/S LIST FLAG
001B            COUNT    EQU $1B       ; COUNTER
001C            PLUSFLG  EQU $1C       ;FLAG FOR EXTENDED MONITOR LIST
001D            CATFLG   EQU $1D       ; FLAG FOR CATALOG LISTING
001E            DIRFLG   EQU $1E       ;FLAG FOR STEP DIRECTION
0024            CH       EQU $24       ;CURSOR HORIZONTAL POSITION
0025            CV       EQU $25       ;CURSOR VERTICAL POSITION
0031            MODE     EQU $31       ;MODE OF MONITOR COMMAND
0036            CSWL     EQU $36       ;CHARACTER OUTPUT VECTOR
003A            PCL      EQU $3A       ;PROGRAM COUNTER
003C            A1L      EQU $3C       ; GENERAL PURPOSE COUNTER
003E            A2L      EQU $3E       ;GENERAL PURPOSE COUNTER
0040            A3L      EQU $40       ; GENERAL PURPOSE COUNTER
0042            A4L      EQU $42       ;GENERAL PURPOSE COUNTER
0050            LINNUM   EQU $50       ;GENERAL PURPOSE 16-BIT REGISTER
0085            FORPNT   EQU $85       ;GENERAL POINTER
009B            LOWTR    EQU $9B       ; GENERAL PURPOSE REGISTER
009D            DSCTMP   EQU $9D       ; TEMP STRING DESCRIPTOR
00B1            CHRGET   EQU $B1       ;GET CHAR.,INCREMENT POINTER
00B7            CHRGOT   EQU $B7       ;GET CHAR., NO INCREMENT
00F9            MEMFLG   EQU $F9       ;MONITOR LIST FLAG
00FA            BUFST    EQU $FA       ;  BEGINNING OF LIST BUFFER
```

Listing 1 *(continued)*

```
00FC            SCRST   EQU $FC       ; BEGINNING OF SCREEN BUFFER
00FE            LSTEND  EQU $FE       ;END OF LISTING
0200            IN      =   $200      ;Input buffer
03D0            BASIC   =   $3D0      ;Soft entry to BASIC
03EA            TELLDOS =   $3EA      ;DOS routine to get change in
03F5            AMP     =   $3F5      ;Ampersand vector
03F8            CTRLY   =   $3F8      ;Control-Y vector
4000            BUFLE   =   $4000     ;Buffer low end
C000            KBD     =   $C000     ;Keyboard input address
C010            KBDSTRB =   $C010     ;Keyboard strobe
D61A            FNDLIN  =   $D61A     ;Find mem. loc. of line in LINNUM
DA0C            LINGET  =   $DA0C     ;Get line no. from input buffer
DAFB            CRDO    =   $DAFB     ;Print carriage return
DB5C            OUTDO   =   $DB5C     ;Print character in accumulator
DEC9            SYNERR  =   $DEC9     ;Syntax error routine
ED24            LINPRT  =   $ED24     ;Print line number
F8D0            INSTDSP =   $F8D0     ;Print disassembled instruction
F940            PRNTYX  =   $F940     ;Print Y and X registers
F953            PCADJ   =   $F953     ;Adjust program counter
FBC1            BASCALC =   $FBC1     ;Calc. start addr. of screen line
FC22            VTAB    =   $FC22     ;Set cursor vertical position
FC58            HOME    =   $FC58     ;Clear screen - home cursor
FC9C            CLREOL  =   $FC9C     ;Clear to end of line
FCBA            NXTA1   =   $FCBA     ;Increment pointer A1L,A1H
FDDA            PRBYTE  =   $FDDA     ;Print accumulator as hex
                                       byte
FDED        63  COUT    =   $FDED     ;Print to output device
FDF0            COUT1   =   $FDF0     ;Print to screen
FE2C            MOVE    =   $FE2C     ;Move memory block
FF3A            BELL    =   $FF3A     ;Sound bell
FFA7            GETNUM  =   $FFA7     ;Get hex bytes from input buffer
FFC7            ZMODE   =   $FFC7     ;Set MODE for GETNUM
8000                    ORG $8000
8000                    NOG
8000            *
8000            * Set ampersand and ctrl-Y vectors
8000            *
8000 A9 4C      START   LDA #$4C
8002 8D F5 03           STA AMP
8005 8D F8 03           STA CTRLY
8008 A9 80              LDA /BEGIN
800A 8D F6 03           STA AMP+1
800D 8D F9 03           STA CTRLY+1
8010 A9 1B              LDA #BEGIN
8012 8D F7 03           STA AMP+2
8015 8D FA 03           STA CTRLY+2
8018 4C D0 03           JMP BASIC
801B A2 00      BEGIN   LDX #0        ;Clear flags
801D 86 1D              STX CATFLG
801F 86 1A              STX LSTFLG
8021 86 F9              STX MEMFLG
8023 86 1C              STX PLUSFLG
8025 86 1E              STX DIRFLG
8027 C9 00      HILITER CMP #0        ;Other command
8029 F0 03              BFL HILITER1  ;No - HILITER
802B 4C CF 80           JMP LISTER
802E            *
802E A2 00      HILITER1 LDX #0       ;Set FLAG and LINE to zero
8030 86 19              STX FLAG
8032 86 06              STX LINE
8034 F0 5B              BFL NXTLN     ;Branch always
8036 2C 00 C0   KEYCHK  BIT KBD       ;Check keyboard
8039 10 FB              BPL KEYCHK    ;Key not pressed
803B AD 00 C0           LDA KBD       ;Key pressed - get it
803E 2C 10 C0           BIT KBDSTRB   ;Reset keyboard strobe
8041 C9 9B              CMP #$9B      ;Is it 'ESC'
8043 D0 05              BTR NOTESC    ;No - branch
8045 85 19              STA FLAG      ;Yes - set FLAG
8047 4C 91 80           JMP NXTLN     ;Remove highlight and exit
804A C9 88      NOTESC  CMP #$88      ;Is it left arrow
```

listing is complete, the program restores the pause to DOS.

When listing is completed, the program pages back one screenful and sets the address at that point as the start of the screen buffer and as the address of the end of the listing. It then reprints this screen, sounds the bell, and prints a "LISTING COMPLETED" message.

The operation of the jumps to beginning and end of the listing is fairly obvious - simply a matter of setting the start of the screen buffer to the start of the listing buffer or the end address of the listing, as mentioned above.

The paging and scrolling are based on checking the buffer for the next previous or next following carriage return. For paging, 23 returns are counted before the next screen is printed, while for scrolling the screen is reprinted after each return is found, and then the next one is searched for.

Stepping one line at a time is accomplished by use of the space bar. The program checks to see whether the last movement called for was forward or backward (by looking at DIRFLG), then calls UPDO or DOWNDO, as appropriate. Default is UPDO, to scroll forward one line.

Commands available for manipulating the listing are:

B - jump to the beginning of the listing

E - jump to the end of the listing

+ or ; - page forward (previous bottom line becomes top line)

- or = - page back (previous top line becomes bottom line)

Right arrow - scroll up (stops on any keypress)

Left arrow - scroll down (stops on any keypress)

Space bar - step forward or backward one line.

& - calls highlighter

ESC - returns to BASIC

If the highlighter was requested, the top line of the screen is changed to the inverse of what it was; that is, normal characters become inverse, inverse characters become normal, and

flashing characters are unchanged. The program then looks for keyboard input. If a right arrow is pressed, the top line is restored and the next line is inverted. Further presses of the right arrow key cause the highlighting line to move on down the screen in this manner. The left arrow works the same way, except that it moves the "highlight" up the screen.

If the highlighter was called from any list routine, then when the highlighted line is at the bottom of the screen, further right arrows make the screen scroll up one line. Left arrows work in an analogous fashion when the highlighted line is at the top of the screen. The "ESC" key causes the currently highlighted line to be restored and the program returns to the caller.

One problem occurs with the highlighter if your listing includes lower case letters, in that the Apple II cannot show lower case letters in inverse. I thought the best thing to do in this event was to convert the lower case to upper case before highlighting. Naturally, when the highlighting is removed the material remains in all upper case. If the list function is in effect, the lower case will be restored as soon as the screen is reprinted for any reason, such as scrolling, paging, or stepping. Another way of handling this situation would be to show all characters except lower case in inverse, leaving the lower case characters normal. If you would like to try this option, get into the monitor with CALL-151, then type "809C:B0 16 EA EA" and press RETURN - after having BLOADed HILISTER, of course.

While the highlighter is in operation, all keys except "ESC" and the right and left arrows are ignored.

The assembly listing for the highlighter portion of the program is included here as Listing 1. This is a stand-alone program as shown, so it can be put to use immediately after keying it in. It should be saved as HiLister1. If you are entering the code without using an assembler, the command is:
BSAVE HILISTER1, A$8000, L$D0.

Part 2 of this article will present a listing of the remainder of the program, and will include instructions for adding it on. Some of the code in the first part of the listing appears redundant, but it is necessary for interfacing to the other parts of the program.

MICRO™

Listing 1 *(continued)*

```
804C D0 1F              BTR NOTLFT      ;No - branch
804E A6 06              LDX LINE        ;Yes - get LINE
8050 CA                 DEX             ;and decrement it
8051 10 14              BPL LFT1        ;Not top of screen
8053 E8                 INX             ;Top of screen
8054 A5 1A              LDA LSTFLG      ;List in effect
8056 05 F9              ORA MEMFLG
8058 05 1D              ORA CATFLG
805A F0 0B              BFL LFT1        ;No - branch
805C 85 19              STA FLAG        ;Yes
805E 20 91 80           JSR NXTLN       ;Restore top line
8061 20 83 83           JSR DOWNDO      ;Scroll down one line
8064 4C 91 80           JMP NXTLN       ;Invert it
8067 86 09      LFT1    STX TEMPX
8069 A2 00              LDX #0
806B F0 23              BFL INVERT      ;Put in highlight
806D C9 95      NOTLFT  CMP #$95        ;Is it right arrow
806F D0 C5              BTR KEYCHK      ;No - get next keypress
8071 A6 06              LDX LINE        ;Get line number
8073 E8                 INX             ;and increment it
8074 E0 18              CPX #24         ;Bottom line
8076 D0 14              BTR RT1         ;No - branch
8078 CA                 DEX             ;Yes
8079 A5 1A              LDA LSTFLG      ;List in effect
807B 05 F9              ORA MEMFLG
807D 05 1D              ORA CATFLG
807F F0 0B              BFL RT1         ;No - branch
8081 85 19              STA FLAG        ;Yes
8083 20 91 80           JSR NXTLN       ;Restore line
8086 20 65 83           JSR UPDO        ;Scroll up one line
8089 4C 91 80           JMP NXTLN       ;Invert it
808C 86 09      RT1     STX TEMPX       ;Save line number
808E A2 00              LDX #0
8090 CA         INVERT  DEX
8091 A5 06      NXTLN   LDA LINE        ;Get line number
8093 20 C1 FB           JSR BASCALC     ;Find address of left end
8096 A0 27              LDY #39         ;Start at end of line
8098 B1 28      GETCH   LDA ($28),Y     ;Get character
809A C9 E0              CMP #$E0        ;Is it lower case
809C 90 02              BLT NOTLC       ;No - check further
809E 29 DF              AND #$DF        ;Yes - make it upper case
80A0 C9 A0      NOTLC   CMP #$A0        ;Is it normal
80A2 90 04              BLT INV         ;No - check further
80A4 29 3F              AND #$3F        ;Yes - invert it
80A6 B0 0C              BGE DISP        ;and display it
80A8 C9 40      INV     CMP #$40        ;Is it flashing
80AA B0 0A              BGE NXTCH       ;Yes - don't change it
80AC 69 80              ADC #$80        ;Must be inverse - make it normal
80AE C9 A0              CMP #$A0        ;Normal now
80B0 B0 02              BGE DISP        ;Yes - display it
80B2 69 40              ADC #$40        ;No - make it so
80B4 91 28      DISP    STA ($28),Y     ;And print it
80B6 88         NXTCH   DEY             ;Get next character
80B7 10 DF              BPL GETCH       ;Not done yet
80B9 A5 19              LDA FLAG        ;Is FLAG set
80BB F0 05              BFL CONT        ;No - check X
80BD A2 00              LDX #0          ;Yes - clear it
80BF 86 19              STX FLAG
80C1 60                 RTS             ;Done
80C2 8A         CONT    TXA             ;X=0
80C3 D0 03              BTR CONT1       ;No - branch
80C5 4C 36 80           JMP KEYCHK      ;Yes - get next command
80C8 A5 09      CONT1   LDA TEMPX       ;Invert next line
80CA 85 06              STA LINE
80CC E8                 INX
80CD F0 C2              BFL NXTLN       ;Branch always
80CF            *
80CF D8         LISTER  RTS
80D0                    END
```

Super Simple Numeric Sort

by Robert L. Martin WB2KTG

Arrange a list in numerical order without a user supplied sorting program

Everyone, at some time, has had to take a list of numbers and arrange them in numerical order. The effort involved in accomplishing this task can, of course, be minimized by the use of a computer and a sorting program. Explained in this article is a sorting technique which doesn't require a user supplied program, but instead uses a built-in BASIC feature-automatic program statement sequencing.

All BASIC interpreters will allow non-sequential program statement entry. That is, the line numbers of statements need not be entered in any specific order. The BASIC interpreter will automatically LIST them in ascending order.

To arrange a list of numbers in ascending order, input each number followed by a period, asterisk, or some other non-numeric character. For non-integer values the decimal point will serve as the non-numeric character.

The Basic interpreter assumes that any digits input preceding a non-numeric character are line numbers. All alphanumeric characters entered following the first non-numeric character are assumed to be BASIC program statements. As long as no attempt is made to RUN the program, no error message will be given.

The example shown is the actual printed output from my Sharp PC-1500 pocket computer and CE-150 printer/plotter.

The use of this technique was discovered at work when I was given a list of 140 repair orders to sequence. Each repair order number was four digits long. Fortunately, I had my PC-1500 with me, along with a bit of imagination. I hope this example of using a computer's "hidden" talents will result in other non-standard techniques being developed to save the time and patience of the human interface.

MICRO

Sample Printout From Sharp PC-1500/CE-150

29	29.
36.5	36.5
414	414.
13.2	13.2
5	5.
1019	1019.
7.25987	7.25987

a]List of Numbers

b]Numbers as Input to the Computer (note Decimal Points).

```
   5:.
   7:.25987
  13:.2
  29:.
  36:.5
 414:.
1019:.
```

c]Output of Computer in Response to a "LLIST" command.

FLOPPY DISKS SALE *$1.19 ea.
Economy Model or Cadillac Quality

LORAN CERTIFIED PERSONAL COMPUTER DISK ***We have the lowest prices!*** LORAN CERTIFIED PERSONAL COMPUTER DISK

***ECONOMY DISKS**

Good quality 5¼" single sided **double** density with hub rings.

Bulk Pac	100 Qty.	$1.19 ea.	Total Price	$119.00
	10 Qty.	1.39 ea.	Total Price	13.90

CADILLAC QUALITY

• Each disk certified • Free replacement lifetime warranty • Automatic dust remover

For those who want cadillac quality we have the Loran Floppy Disk. Used by professionals because they can rely on Loran Disks to store important data and programs without fear of loss! Each Loran disk is 100% certified (an exclusive process) plus each disk carries an exclusive FREE REPLACEMENT LIFETIME WARRANTY. With Loran disks you can have the peace of mind without the frustration of program loss after hours spent in program development.

100% CERTIFICATION TEST

Some floppy disk manufacturers only sample test on a batch basis the disks they sell, and then claim they are certified. Each Loran disk is individually checked so you will never experience data or program loss during your lifetime!

FREE REPLACEMENT LIFETIME WARRANTY

We are so sure of Loran Disks that we give you a free replacement warranty against failure to perform due to faulty materials or workmanship for as long as you own your Loran disk.

AUTOMATIC DUST REMOVER

Just like a record needle, disk drive heads must travel hundreds of miles over disk surfaces. Unlike other floppy disks the Loran smooth surface finish saves disk drive head wear during the life of the disk. (A rough surface will grind your disk drive head like sandpaper). The lint free automatic CLEANING LINER makes sure the disk-killers (dust & dirt) are being constantly cleaned while the disk is being operated. PLUS the Loran Disk has the highest probability rate of any other disk in the industry for storing and retaining data without loss for the life of the disk.

Loran is definitely the Cadillac disk in the world

Just to prove it even further, we are offering these super LOW INTRODUCTORY PRICES

List $4.99 ea. INTRODUCTORY SALE PRICE $2.99 ea. (Box of 10 only) Total price $29.90

$3.33 ea. (3 quantity) Total price $9.99

All disks come with hub rings and sleeves in an attractive package.

LORAN Floppy Disk

DISK DRIVE CLEANER $19.95

Everyone needs a disk drive doctor

FACTS

- 60% of all drive downtime is directly related to poorly maintained drives.
- Drives should be cleaned each week regardless of use.
- Drives are sensitive to smoke, dust and all micro particles.
- Systematic operator performed maintenance is the best way of ensuring error free use of your computer system.

The Cheetah disk drive cleaner can be used with single or double sided 5¼" disk drives. The Cheetah is an easy to use fast method of maintaining efficient floppy diskette drive operation.

The Cheetah cleaner comes with 2 disks and is packed in a protective plastic folder to prevent contamination.

List $29.95 / Sale $19.95

Add $10.00 for shipping, handling and insurance. Illinois residents please add 6% tax. Add $20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. Visa - MasterCard - C.O.D.

PROTECTO ENTERPRIZES (WE LOVE OUR CUSTOMERS!)

BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

EXECUTIVE LETTER QUALITY

DAISY WHEEL PRINTER SALE $379.00

COMSTAR 13"

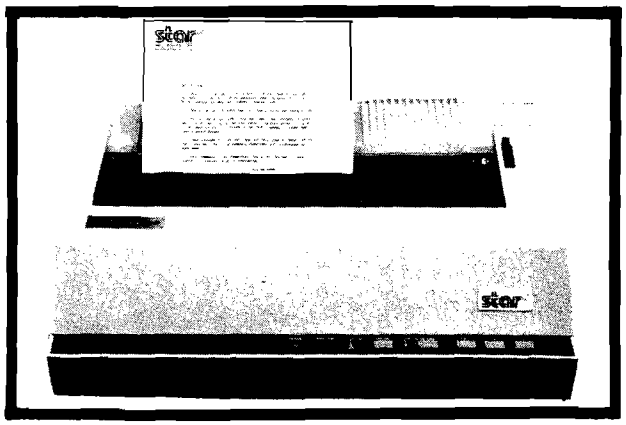

computer printer

COMSTAR 13" "DAISY WHEEL" POWER TYPE PRINTER is typewriter friendly. It uses a simple drop in cassette ribbon. Just turn on the COMSTAR 13" for Crip executive quality correspondence at 18 CPS with a daisy wheel that prints 96 power type flawless characters, bi-directional. Designed for personal and business applications. COMSTAR 13" carriage accepts paper from letter to legal size, continuous computer paper or single sheets, you can set right and left margins, vertical and horizontal tabs. (Serial and parallel interface). LIST PRICE $599.00 **SALE PRICE $379.00**

OLYMPIA "DAISY WHEEL" COMBINATION

PRINTER/TYPEWRITER SALE $489.00

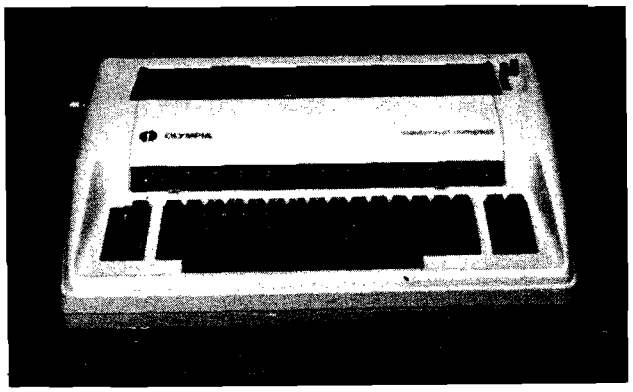

Olympia (WORLD'S FINEST)

THE **Olympia COMPUTER PRINTER ELECTRONIC TYPEWRITER** is the ultimate for Home, Office, and Word Processing. You get **the best Electronic Typewriter made** and used by the world's largest corporations (better than IBM Selectric) plus a **Superb Executive Correspondence Computer Printer!!** (Two machines in one!) Just flick the switch for the option you want to use. The extra large carriage allows 14⅛" printer paper width. It has cassette ribbon lift off correction. Baud rates, Jumper selectable 75 through 19,200 (parallel interface)
LIST $799.00 **SALE $489.00**

• 15 DAY FREE TRIAL — 90 DAY FREE REPLACEMENT GUARANTEE

Add $17.50 for shipping and handling!!

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. VISA — MASTER CARD ACCEPTED. We ship C.O.D.

PROTECTO ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

SANYO MONITOR SALE!!

9" Data Monitor

- 80 Columns × 24 lines
- Green text display
- Easy to read - no eye strain
- Up front brightness control
- High resolution graphics
- Quick start - no preheating
- Regulated power supply
- Attractive metal cabinet
- UL and FCC approved

- ***15 Day Free Trial - 90 Day Immediate Replacement Warranty***

9" Screen - Green Text Display	**$ 69.00**
12" Screen - Green Text Display (anti-reflective screen)	**$ 99.00**
12" Screen - Amber Text Display (anti-reflective screen)	**$ 99.00**
12" Screen-Super 1000 Line Amber Text Display	**$129.00**
14" Screen - Color Monitor (national brand)	**$249.00**

Display Monitors From Sanyo

With the need for computing power growing every day, Sanyo has stepped in to meet the demand with a whole new line of low cost, high quality data monitors. Designed for commercial and personal computer use. All models come with an array of features, including up-front brightness and contrast controls. The capacity 5 × 7 dot characters as the input is 24 lines of characters with up to 80 characters per line.

Equally important, all are built with Sanyo's commitment to technological excellence. In the world of Audio/Video, Sanyo is synonymous with reliability and performance. And Sanyo quality is reflected in our reputation. Unlike some suppliers, Sanyo designs, manufactures and tests virtually all the parts that go into our products, from cameras to stereos. That's an assurance not everybody can give you!

SANYO

Official Video Products of the Los Angeles 1984 Olympics

• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS

Add $10.00 for shipping, handling and insurance. Illinois residents please add 6% tax. Add $20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. Visa - MasterCard - C.O.D.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

CMPRSS — *Improved Applesoft Compression Program*

Compress large programs easily and retain comments without overflowing Called Line Number Table

by Ian R. Humphreys

```
                ;**APPLESOFT SUBROUTINES**
                ;
D61A            FNDLIN   EQU $D61A     ;Find start of
Ø8ØØ                                   ;givn Applesft ln
D697            STXTPT   EQU $D697     ;Init TXTPTR for
Ø8ØØ                                   ;pass of program
DAØC            LINGET   EQU $DAØC     ;Convrt dec to hex
DAFB            CRDO     EQU $DAFB     ;Output carriage
Ø8ØØ                                   ;return to screen
DB3A            STROUT   EQU $DB3A     ;Output a text
Ø8ØØ                                   ;string to screen
ED24            LINPRT   EQU $ED24     ;Print a hex line
Ø8ØØ                                   ;# in decimal
ØØB7            CHRGOT   EQU $ØØB7     ;Get curr byte
Ø8ØØ                                   ;w/o inc TXTPTR
ØØB1            CHRGET   EQU $ØØB1     ;Inc TXTPTR and
Ø8ØØ                                   ;get next byte

                ;
                ;**ZERO PAGE LOCATIONS**
                ;
ØØØ7            MAXX     EQU $ØØØ7     ;Loop ctrl for
Ø8ØØ                        ;transfLINBUF to new prog
ØØØ5            OLDBEG   EQU $ØØØ5     ;Ptr to last EOS
Ø8ØØ                                   ;in orig prog
nØØ4            LASTX    EQU $ØØØ4     ;Ptr to last EOS
Ø8ØØ                                   ;in LINBUF
ØØØ3            NEWPTR+1 EQU $ØØØ3
ØØØ2            NEWPTR   EQU $ØØØ2     ;Ptr to curr posn
Ø8ØØ                                   ;in compr prog
ØØØ1            IFFLAG   EQU $ØØØ1     ;Flag set when IF
Ø8ØØ                                   ;found in line
ØØØØ            ERRORS   EQU $ØØØØ     ;Flag for errors
Ø8ØØ                                   ;during PASS #1
ØØØA            LSTEOS   EQU $ØØØA     ;Last EOS token
Ø8ØØ                                   ;$ØØ or $FF
ØØØ9            OLDEOP+1 EQU $ØØØ9
ØØØ8            OLDEOP   EQU $ØØØ8     ;Value of EPROG
Ø8ØØ
```

Editor's Note: This program improves on programs previously done by: Barton M. Bauers (MICRO 52:89); Peter J.G. Meyer (MICRO 55:26).

Requirements:
Apple II or Apple II Plus; 48K and Applesoft BASIC in ROM

I had just finished writing a large, well-commented Applesoft program which was part of a major System I was working on. Unfortunately, when I came to test it, there was not enough room for its several large arrays and various string variables, and the program would not run. Coincidentally, on that same day, I purchased the September 1982 edition of MICRO magazine and was excited to see that it contained an article by Barton M. Bauers, giving a source listing of a machine language routine which compressed Applesoft programs. I eagerly hurried home, read the article and proceeded to key it into my Apple. I tested it on several small programs first and found that it seemed to work as described, so I set about running COMPRESS on my large program. Much to my dismay, COMPRESS aborted with ERROR #3 which meant that the Called Line Number Table had overflowed and so I couldn't use it! Not only does Barton Bauers' program

impose a limit of 256 called line numbers, but it doesn't even check for duplicates, so for anything but a very small program the table soon fills up and overflows. One of the major reasons for wanting to compress the Applesoft code cannot be accommodated! Also, Mr. Bauers' program contains an error. Applesoft allows a statement of the form:

```
1ØØ NEXT I,J,K
```

Mr. Bauers' COMPRESS reduces this to:

```
1ØØ NEXT
```

instead of:

```
1ØØ NEXT :NEXT :NEXT
```

introducing a logic error into your Applesoft program!

Not being able to COMPRESS my large program, I resorted to removing all the REMs manually and finally, after several hours work, my program was small enough to run. Unfortunately, my source version has suffered as it now lacked comments and was consequently difficult to read. I resolved that I would redesign and rewrite the compression routine and I hereunder present my results. I have called my routine CMPRSS because it will compress an Applesoft program even more than COMPRESS does; it also uses less RAM space.

What CMPRSS does

CMPRSS compresses an Applesoft program by:

(a) Concatenating as many statements as possible onto one line, thus eliminating many of the unreferenced line numbers

(b) Removing the text of REM statements and where possible the REM itself (in some instances even when a REM line is referenced)*

(c) Removing LETs

(d) Removing the variable names from NEXT statements (correctly!)

(e) Truncating variable names to a maximum of two characters*

* *Additional features not performed by COMPRESS.*

```
                                    ;at beg of PASS#2
0051        LINNUM+1 EQU $0051
0050        LINNUM   EQU $0050      ;Line num returnd
0800                                ;by LINGET
0067        TXTTAB   EQU $0067      ;Ptr to start of
0800                                ;Applesoft prog
006E        EARS+1   EQU $006E
006D        EARS     EQU $006D      ;Ptr to end of
0800                                ;array space
006C        ARS+1    EQU $006C
006B        ARS      EQU $006B      ;Ptr to start of
0800                                ;array space
006A        LOMEM+1  EQU $006A
0069        LOMEM    EQU $0069      ;Lomem pointer
0068        TXTTAB+1 EQU $0068
0074        HIMEM+1  EQU $0074
0073        HIMEM    EQU $0073      ;Himem pointer
009C        LSTLIN+1 EQU $009C
009B        LSTLIN   EQU $009B      ;Ptr to start of
0800           ;line found by FNDLIN
00AF        EPROG    EQU $00AF      ;Ptr to end of
0800                                ;Applesoft prog
00B9        TXTPTR+1 EQU $00B9
00B8        TXTPTR   EQU $00B8      ;Ptr to current
0800                                ;byte of program
00FD        LN2+1    EQU $00FD
00FC        LN2      EQU $00FC      ;Hex line number
0800                                ;of undefnd line
00FB        LN1+1    EQU $00FB
00FA        LN1      EQU $00FA      ;Hex line number
0800                                ;containing error
00F9        TOKEN    EQU $F9
0800                                ;GOSUB,THEN token
00B8        OLDPTR   EQU $00B8      ;Ptr to curr posn
0800                                ;in old program
00FC        TEMP     EQU $00FC      ;Holds EOS byte
0800           ;until put into LSTEOS

---

             ;
             ;**OTHER LOCATIONS**
             ;
03D0         DOSWS    EQU $03D0      ;DOS warmst vector
03F5         BJP      EQU $03F5      ;& vector
9500         LINBUF   EQU $9500      ;Base address of
0800                                ;cmprssd ln buffer

---

             ;
             ;**CONSTANTS**
             ;
0000         ENDLIN   EQU $00        ;Non-referenced
0800                                ;line token
0022         QUOTE    EQU $22        ;ASCII quote
002C         COMMA    EQU $2C        ;ASCII comma
0030         ZERO     EQU $30        ;ASCII zero
0039         NINE     EQU $39        ;ASCII '9'
003A         COLON    EQU $3A        ;ASCII ':'
0041         LETTRA   EQU $41        ;ASCII 'A'
005A         LETTRZ   EQU $5A        ;ASCII 'Z'
0082         NXTTOK   EQU $82        ;NEXT token
00AA         LETTOK   EQU $AA        ;LET token
00AB         GOTOTK   EQU $AB        ;GOTO token
00B0         GOSBTK   EQU $B0        ;GOSUB token
00AD         IFTOK    EQU $AD        ;IF token
00B2         REMTOK   EQU $B2        ;REM token
00C4         THENTK   EQU $C4        ;THEN token
00FF         REFLIN   EQU $FF        ;Referenced line
0800                                ;token
0800                                ;
```

```
9000                    ORG $9000
9000 A9 13      START   LDA #< BEGIN   ;Establish &
9002 8D F6 03           STA BJP1       ; vector
9005 A9 90              LDA #> BEGIN
9007 8D F7 03           STA BJP2
900A A9 00              LDA #< START   ;Reset HIMEM to
900C 85 73              STA HIMEM      ; protect CMPRSS
900E A9 90              LDA #> START
9010 85 74              STA HIMEM+1
9012 60                 RTS
9013 20 FB DA   BEGIN   JSR CRDO       ;Output CR to screen
9016 A9 62              LDA #< PASS1A  ;Print PASS #1
9018 A0 94              LDY #> PASS1A  ;message
901A 20 3A DB           JSR STROUT
901D A2 00              LDX #$00       ;Init error mess
901F 86 00              STX ERRORS
9021 20 97 D6           JSR STXTPT     ;Init TXTPTR
9024 20 B1 00   NXTLIN  JSR CHRGET     ;Get next byte
9027 A0 01              LDY #$01
9029 B1 B8              LDA (TXTPTR),Y  ;End-of-prog?
902B D0 27              BNE SAVLIN     ;No-so branch
902D 20 FB DA           JSR CRDO
9030 A9 6D              LDA #< PASS1B   ;Print End Pass1
9032 A0 94              LDY #> PASS1B
9034 20 3A DB           JSR STROUT
9037 20 FB DA           JSR CRDO       ;CR to screen
903A A5 00              LDA ERRORS     ;Any errors-Pass1
903C F0 10              BEQ PASS2      ;No-so Pass2
903E 20 FB DA           JSR CRDO
9041 A9 7C              LDA #< ERRMES   ;Print Not Com-
9043 A0 94              LDY #> ERRMES   ;pressed message
9045 20 3A DB           JSR STROUT
9048 20 03 91           JSR RESTOR     ;Remove $FF tokens
904B 4C D0 03           JMP DOSWS      ;BASIC via DOS
904E 20 22 91   PASS2   JSR SECOND     ;Perform Pass2
9051 4C D0 03           JMP DOSWS      ;BASIC via DOS
9054 C8         SAVLIN  INY            ;Save Line#
9055 B1 B8              LDA (TXTPTR),Y
9057 85 FA              STA LN1
9059 C8                 INY
905A B1 B8              LDA (TXTPTR),Y
905C 85 FB              STA LN1+1
905E A5 B8              LDA TXTPTR
9060 18                 CLC
9061 69 03              ADC #$03       ;Inc TXTPTR to
9063 85 B8              STA TXTPTR     ;first byte in
9065 90 02              BCC SCANLN     ;text of prog ln
9067 E6 B9              INC TXTPTR+1
9069 20 B1 00   SCANLN  JSR CHRGET     ;Search for End
906C C9 00              CMP #ENDLIN    ;of Line Token
906E F0 B4              BEQ NXTLIN     ;Unref and refnd
9070 C9 FF              CMP #REFLIN
9072 F0 B0              BEQ NXTLIN
9074 C9 C4              CMP #THENTK    ;THEN token?
9076 D0 0F              BNE NEXT       ;No-so branch
9078 A0 01              LDY #$01
907A B1 B8              LDA (TXTPTR),Y
907C 38                 SEC
907D E9 30              SBC #$30
907F C9 0A              CMP #$0A
9081 B0 E6              BCS SCANLN
9083 A9 C4              LDA #THENTK    ;Restore THEN
9085 D0 08              BNE STORE      ;token in accum
9087 C9 AB      NEXT    CMP #GOTOTK    ;GOTO token?
9089 F0 04              BEQ STORE      ;Yes-so branch
908B C9 B0              CMP #GOSBTK    ;GOSUB token?
908D D0 DA              BNE SCANLN     ;No-so branch
908F 85 F9      STORE   STA TOKEN      ;Save token
9091 20 B1 00   READLN  JSR CHRGET     ;Inc Ptrto ln#
```

How CMPRSS works

CMPRSS operates in two passes of your Applesoft program. The first pass consists of scanning the program for referenced line numbers which are found in the following Applesoft statement types:

```
GOTO
GOSUB
IF...THEN
ON...GOTO
ON...GOSUB
```

CMPRSS does not check the following commands for referenced line numbers:

LIST RUN DEL

These statements are not commonly used and can be adjusted manually after running CMPRSS if they should occur.

In this first pass, each time a line number is referenced, somehow it must be recorded so that when the Applesoft program is compressed during Pass #2, referenced line numbers will not be removed. Mr. Bauers' COMPRESS uses a Called Line Number Table which severely limits the number of referenced lines you can have in your program, especially as it does not check for duplicates. I have decided to use a method of recording a line number as being referenced which imposes no restriction upon the amount. It involves flagging the referenced lines within the Applesoft program itself. For example, take the following simple program:

```
10 INPUT J
20 IF J=0 THEN 50
30 PRINT J
40 GOTO 10
50 END
```

Each Applesoft program line is represented in memory as follows:
(a) Two bytes in lo-byte, hi-byte order which point to the beginning of the next Applesoft line in memory. This 2-byte address is in hexadecimal.
(b) Two bytes in lo-byte, hi-byte order representing the line number (in hexadecimal) of the Applesoft line.
(c) Following the initial 4 bytes of the line is the 'text' of the Applesoft line itself. All reserved words (commands) are represented in a single byte by a 'token'. For example, INPUT is

represented by the token $84 (adopting the usual convention of preceding a hexadecimal number with $). All tokens can be recognized as bytes with their high bit set (i.e., $80 or greater). Applesoft tokens range from $80 (END) to $EA (MID$). All the rest of the text line (which is not represented by an Applesoft token) is represented character by character by each character's ASCII code (including line numbers in GOTOs etc.). All spaces are eliminated by the Interpreter except those within quoted strings.

(d) The end of the Applesoft line is marked by a $00 byte. The hexadecimal representation of our sample program in memory thus would be as follows, starting at address $800:

```
$800 00 08 08 0A 00 84 4A 00
$808 14 08 14 00 AD 4A D0 30
$810 14 35 30 00 1B 08 1E 00
$818 BA 4A 00 23 08 28 00 AB
$820 31 30 00 29 08 32 00 80
$828 00 00 00
```

The end of the entire Applesoft program is marked by a sequence of three $00 bytes.

Because the end of each Applesoft line is marked by a $00 byte, there is also a $00 byte immediately preceding each following line. Note that there is also a $00 byte preceding the first line which usually begins at $801 in memory.

The method I have devised of flagging a referenced line is to set the $00 byte immediately preceding the referenced line to $FF (note that in a normal Applesoft program no byte is ever set to $FF so therre can be no confusion).

After Pass #1 through the sample program, it will look like this:

```
$800 FF 08 08 0A 00 84 4A 00
$808 14 08 14 00 AD 4A D0 30
$810 C4 35 30 00 1B 08 1E 00
$818 B4 4A 00 23 08 28 00 AB
$820 31 30 FF 29 08 32 00 80
$828 00 00 00
```

During Pass #1, while CMPRSS is flagging all referenced lines with $FF tokens, it occurred to me that the routine might as well check that these line numbers actually exist and so I have incorporated Peter Meyer's GOTO/GOSUB checker from the December 1982 edition of MICRO. The

```
9094 20 0C DA           JSR LINGET    ;Read ln# and st
9097 A5 50              LDA LINNUM
9099 A4 51              LDY LINNUM+1
909B 85 FC              STA LN2       ;Save LINNUM in
909D 84 FD              STY LN2+1     ;LN2
909F 20 1A D6           JSR FNDLIN    ;Look for ln#
90A2 B0 35              BCS CHKCOM    ;Found-so branch
90A4 E6 00              INC ERRORS    ;Inc err count
90A6 20 FB DA  NOLINE   JSR CRDO
90A9 A5 FB              LDA LN1+1
90AB A6 FA              LDX LN1
90AD 20 24 ED           JSR LINPRT    ;Print ln# w err
90B0 A5 F9              LDA TOKEN
90B2 C9 C4              CMP #THENTK   ;THEN token?
90B4 D0 07              BNE NEXT1     ;No-so branch
90B6 A9 59              LDA #<THEN    ;Print THEN on
90B8 A0 94              LDY #>THEN    ; screen
90BA 4C CC 90           JMP PRINT
90BD C9 B0     NEXT1    CMP #GOSBTK   ;GOSUB token?
90BF F0 07              BEQ NEXT2     ;Yes-so branch
90C1 A9 46              LDA #<GOTO    ;Must have GOTO
90C3 A0 94              LDY #>GOTO    ;so print GOTO
90C5 4C CC 90           JMP PRINT     ;on screen
90C8 A9 4F     NEXT2    LDA #<GOSUB   ;Print GOSUB
90CA A0 94              LDY #>GOSUB
90CC 20 3A DB  PRINT    JSR STROUT    ;Print undefd
90CF A5 FD              LDA LN2+1     ;line #
90D1 A6 FC              LDX LN2
90D3 20 24 ED           JSR LINPRT
90D6 4C DE 90           JMP CHK1
90D9 A2 FF     CHKCOM   LDX #REFLIN   ;Put $FF in prog
90DB 20 F0 90           JSR WRTBYT    ;to flag ref ln
90DE 20 B7 00  CHK1     JSR CHRGOT    ;Re-get curbyte
90E1 C9 2C              CMP #COMMA    ;Comma?
90E3 F0 AC              BEQ READLN    ;Yes-so branch
90E5 A5 B8              LDA TXTPTR    ;Dec TXTPTR in
90E7 D0 02              BNE NEXT3     ;prep for CHRGET
90E9 C6 B9              DEC TXTPTR+1
90EB C6 B8     NEXT3    DEC TXTPTR
90ED 4C 69 90           JMP SCANLN
90F0 18        WRTBYT   CLC           ;Put $00 or $FF
90F1 A5 9B              LDA LSTLIN    ;in byte preceed
90F3 69 FF              ADC #$FF      ;a partic Apple
90F5 85 9B              STA LSTLIN    ;soft line
90F7 A5 9C              LDA LSTLIN+1
90F9 69 FF              ADC #$FF
90FB 85 9C              STA LSTLIN+1
90FD 8A                 TXA           ;X-reg contains
90FE A0 00              LDY #$00      ;$00 or $FF
9100 91 9B              STA (LSTLIN),Y
9102 60                 RTS
9103 A5 67     RESTOR   LDA TXTTAB    ;All $00 to $FF
9105 85 9B              STA LSTLIN    ;Init LSTLIN to
9107 A5 68              LDA TXTTAB+1  ;start of prog
9109 85 9C              STA LSTLIN+1
910B A2 00     REST1    LDX #ENDLIN
910D 20 F0 90           JSR WRTBYT    ;Put $00 before
9110 A0 01              LDY #$01      ;current line
9112 B1 9B              LDA (LSTLIN),Y  ;Load lo-byte
9114 AA                 TAX           ;of next line ptr trans
9115 C8                 INY           ;to X-Register
9116 B1 9B              LDA (LSTLIN),Y  ;load hi-byte
9118 85 9C              STA LSTLIN+1  ;Update LSTLIN
911A 86 9B              STX LSTLIN
911C 88                 DEY
911D B1 9B              LDA (LSTLIN),Y  ;End of Prog?
911F D0 EA              BNE REST1     ;No-so loop
9121 60                 RTS
9122 20 FB DA  SECOND   JSR CRDO      ;Start of PASS2
```

```
9125 A9 8F            LDA #< PASS2A  ;Print PASS2 mes
9127 AØ 94            LDY #> PASS2A
9129 2Ø 3A DB         JSR STROUT
912C 2Ø FB DA         JSR CRDO
912F A9 FF            LDA #REFLIN    ;Init variables
9131 85 Ø4            STA LASTX
9133 A5 67            LDA TXTTAB
9135 85 9B            STA LSTLIN
9137 85 Ø2            STA NEWPTR
9139 85 B8            STA OLDPTR
913B A5 68            LDA TXTTAB+1
913D 85 9C            STA LSTLIN+1
913F 85 Ø3            STA NEWPTR+1
9141 85 B9            STA OLDPTR+1
9143 A5 AF            LDA EPROG
9145 85 Ø8            STA OLDEOP
9147 A5 BØ            LDA EPROG+1
9149 85 Ø9            STA OLDEOP+1
914B A9 ØØ            LDA #ENDLIN
914D 85 ØA            STA LSTEOS
914F 85 Ø1            STA IFFLAG
9151 2Ø Ø5 94         JSR DECOLD
9154 2Ø F7 93         JSR DECNEW
9157 2Ø C5 93         JSR GETLIN     ;Get 1st ln#
915A 2Ø 39 93         JSR NEWLIN     ;Init LINBUF
915D 2Ø 22 94 GETBYT  JSR GETOLD     ;Get next byte
9160 C9 FF            CMP #REFLIN    ;EOLine Ref
9162 FØ Ø4            BEQ GB1        ;Yes-so branch
9164 C9 ØØ            CMP #ENDLIN    ;EOLine Unref
9166 DØ 17            BNE GB2        ;No-so branch
9168 85 ØA    GB1     STA LSTEOS     ;Recall last End
916A 85 FC            STA TEMP       ;of Statmt Token
916C 2Ø DØ 91         JSR EOL        ;Deal with EOL
916F 9Ø EC    GB1A    BCC GETBYT
9171 2Ø 6E 93         JSR EOP        ;Deal w EOProg
9174 A9 9A            LDA #< PASS2B  ;Print END PASS2
9176 AØ 94            LDY #> PASS2B
9178 2Ø 3A DB         JSR STROUT
917B 2Ø FB DA         JSR CRDO
917E 6Ø               RTS
917F C9 3A    GB2     CMP #COLON     ;Colon?
9181 DØ Ø6            BNE GB3        ;No-so branch
9183 2Ø Ø2 92         JSR EOS        ;Deal w EOStmt
9186 4C 5D 91         JMP GETBYT     ;Get next byte
9189 C9 AA    GB3     CMP #LETTOK    ;LET token?
918B FØ DØ            BEQ GETBYT     ;Yes - ignore
918D C9 B2            CMP #REMTOK    ;REM token?
918F DØ Ø6            BNE GB4        ;No-so branch
9191 2Ø 1D 92         JSR REMARK     ;Deal with REM
9194 4C 6F 91         JMP GB1A       ;Check EOP
9197 C9 82    GB4     CMP #NXTTOK    ;NEXT token?
9199 DØ Ø6            BNE GB5        ;No-so branch
919B 2Ø 59 92         JSR NEXTX      ;Deal w NEXT
919E 4C 5D 91         JMP GETBYT
91A1 C9 22    GB5     CMP #QUOTE     ;Is it a quote?
91A3 DØ Ø6            BNE GB6        ;No-so branch
91A5 2Ø 85 92         JSR STRING     ;Deal with quote
91A8 4C 5D 91         JMP GETBYT
91AB 2Ø 2A 94 GB6     JSR LETTER     ;Is it a letter?
91AE BØ Ø6            BCS GB7        ;No-so branch
91BØ 2Ø A6 92         JSR VARIBL     ;Yes-must be var
91B3 4C 5D 91         JMP GETBYT
91B6 C9 AD    GB7     CMP #IFTOK     ;IF token?
91B8 DØ Ø8            BNE GB8        ;No-not special
91BA A4 Ø1            LDY IFFLAG     ;If IFFLAG isn't
91BC DØ Ø4            BNE GB8        ;Ø then leave
91BE A4 Ø4            LDY LASTX      ;Remem beg of IF
91CØ 84 Ø1            STY IFFLAG
91C2 2Ø 1B 94 GB8     JSR PUTBUF     ;Byte in LINBUF
91C5 9Ø 96            BCC GETBYT     ;LINBUF not full
```

process of Pass #1 goes something like this:

(a) Locate a GOTO, GOSUB or THEN token.

(b) Call the Applesoft Interpreter routine LINGET to get the 'decimalized' line number and convert it to hexadecimal.

(c) Call the Applesoft Interpreter routine FNDLIN to locate the line number in the Applesoft program.

(d) If it is found, store $FF in the byte immediately preceding the line; otherwise print an error message on the screen and set the error flag.

(e) Repeat until the end of the Applesoft program is reached.

Other Applesoft Interpreter routines used are:

CHRGET	increment TXTPTR, the text pointer and load the next byte of the Applesoft program into the Accumulator.
CHRGOT	same as CHRGET but does not increment TXTPTR.
STXTPT	initialize TXTPTR to the byte immediately preceding the start of the Applesoft program in preparation for scanning through it.
CRDO	output a carriage return to the screen
STROUT	prints a text string to the screen (used for messages).
LINPRT	prints a two-byte hexadecimal number as a decimal number to the screen.

By using these routines, I was able to considerably reduce the amount of memory occupied by CMPRSS; it occupies 3 pages of memory less than COMPRESS and, in addition, it also checks for unreferenced line numbers.

If any unreferenced line numbers are encountered during Pass #1, the Applesoft program will not be compressed. CMPRSS cannot just return control to Applesoft however, because the Applesoft program will be sprinkled with $FF tokens. Before returning control to the Interpreter, a routine called RESTOR is executed which replaces all $FF bytes with $00 bytes. Return is then made via the DOS warm start vector at $3D0.

If no unreferenced line numbers are encountered, CMPRSS enters Pass #2 which is the compression phase. Our sample program, after compression will look like this:

```
1Ø INPUT J : IF J = Ø THEN 5Ø
3Ø PRINT J : GOTO 1Ø
5Ø END
```

which in memory will look like:

```
$8ØØ ØØ 1Ø Ø8 ØA ØØ 84 4A 3A
$8Ø8 AD 4A DØ 3Ø C4 35 3Ø ØØ
$81Ø 1B Ø8 1E ØØ BA 4A 3A AB
$818 31 3Ø ØØ 21 Ø8 32 ØØ 8Ø
$82Ø ØØ ØØ ØØ
```

All $FFs have been replaced by $00 again. This program has been compressed by 8 bytes or 20% of the original size. Programs containing REMs and long variable names show much more spectacular reductions after compression.

Techniques used by CMPRSS for Compression

(a) Concatenation of statements and removal of line numbers.

As many statements as possible are concatenated onto each line (to a maximum of 255 characters per line). This often results in longer lines than can ever be keyed in manually through the keyboard. Referenced lines cannot be concatenated, so the process stops when an $FF token is encountered. Also, if an IF statement occurs in the Applesoft line, then the next line cannot be concatenated on the end or it will alter the logic flow of the program. E.g.,

```
1ØØ IF A = B THEN A = A + 1
11Ø B = B + 1
```

cannot be compressed as:

```
1ØØ IF A = B THEN A = A + 1 :
                    B = B + 1
```

because in the original program, B = B + 1 is always performed regardless of the values of A and B, whereas in the "compressed" version B = B + 1 is only executed when A = B. This is of paramount importance. Take the following example from Mr. Bauers' article:

```
(1) 1Ø GOTO 5Ø
    2Ø J = 5
    5Ø END
```

```
91C7 2Ø AE 93          JSR BAKTRK    ;LINBUF full so
91CA 2Ø 39 93          JSR NEWLIN    ;backtrk, start
91CD 4C 5D 91          JMP GETBYT    ;new ln,nxt byte
91DØ C9 FF      EOL    CMP #REFLIN   ;Deal w EOL
91D2 DØ 15             BNE EOL2      ;Ref line - No
91D4 A9 ØØ      EOLX   LDA #ENDLIN   ;Yes Replace $FF
91D6 2Ø 1B 94          JSR PUTBUF    ;w $ØØ in LINBUF
91D9 2Ø 9B 93          JSR TRNBUF    ;Transfer LINBUF
91DC                                  ;to new program
91DC 2Ø C5 93   EOLØ   JSR GETLIN    ;Get nxt Ap ln#
91DF BØ Ø4             BCS EOL1      ;Branch if EOP
91E1 2Ø 39 93          JSR NEWLIN    ;Newln in LINBUF
91E4 18                CLC           ;Flag not EOP
91E5 2Ø D5 92   EOL1   JSR RESOLD    ;Rset OLDBEG ptr
91E8 6Ø                RTS
91E9 A5 Ø1      EOL2   LDA IFFLAG    ;Force EOL?
91EB DØ E7             BNE EOLX      ;Yes-so branch
91ED A9 3A             LDA #COLON    ;Colon-mark EOS
91EF 86 Ø4             STX LASTX     ;Updte LASTX ptr
91F1 2Ø 1B 94          JSR PUTBUF    ;Colon in LINBUF
91F4 9Ø Ø5             BCC EOL4      ;Not full-branch
91F6 CA         EOL3   DEX
91F7 A9 FF             LDA #REFLIN   ;Force EOL
91F9 DØ D5             BNE EOL       ;Always branch
91FB 2Ø C5 93   EOL4   JSR GETLIN    ;Get new ln#
91FE BØ F6             BCS EOL3      ;EOP - branch
92ØØ 9Ø E3             BCC EOL1      ;Not EOP-branch
9202 86 Ø4      EOS    STX LASTX     ;Deal w EOS
9204 2Ø 1B 94          JSR PUTBUF    ;Updte LASTX ptr
9207 9Ø ØC             BCC EOS1      ;LINBUF not full
9209 CA                DEX
92ØA A9 ØØ             LDA #ENDLIN   ;terminate ln
92ØC 2Ø 1B 94          JSR PUTBUF    ;$ØØ in LINBUF
92ØF 2Ø 9B 93          JSR TRNBUF
9212 2Ø 39 93          JSR NEWLIN    ;Start a new line
9215                                  ;in LINBUF
9215 2Ø D5 92   EOS1   JSR RESOLD    ;Reset OLDBEG ptr
9218 A9 ØØ             LDA #ENDLIN
921A 85 ØA             STA LSTEOS    ;Set last EOS to
921C 6Ø                RTS           ;$ØØ
921D 2Ø 22 94   REMARK JSR GETOLD    ;Deal with REM
9220 C9 FF             CMP #REFLIN   ;1st loop reading
9222 FØ Ø8             BEQ REM1      ;bytes until EOL
9224 C9 ØØ             CMP #ENDLIN   ;($ØØ or $FF) is
9226 DØ F5             BNE REMARK    ;reached
9228 AØ ØØ             LDY #$ØØ      ;Set Y-reg to re-
922A                                  ;member that
922A FØ Ø2             BEQ REM2      ;$ØØ was EOL
922C AØ Ø1      REM1   LDY #$Ø1      ;or $FF was EOL
922E 85 FC      REM2   STA TEMP      ;Temp store EOL
9230 EØ Ø4             CPX #$Ø4      ;Is REM on sep ln?
9232 FØ Ø4             BEQ REM3      ;Yes, so branch
9234 CA                DEX           ;No, so drop REM
9235 4C DØ 91          JMP EOL
9238 A5 ØA      REM3   LDA LSTEOS    ;Is Rem referencd
923A DØ Ø7             BNE REM4      ;Yes, so branch
923C CØ ØØ             CPY #$ØØ      ;Is nxt ln ref?
923E FØ 11             BEQ REM5      ;No, so branch
9240 4C DC 91          JMP EOLØ      ;Drop Rem line
9243 CØ ØØ      REM4   CPY #$ØØ      ;Is nxt ln ref?
9245 FØ ØA             BEQ REM5      ;No, so branch
9247 A9 B2             LDA #REMTOK   ;Retain REM, put
9249 2Ø 1B 94          JSR PUTBUF    ;token in LINBUF
924C A9 FF             LDA #REFLIN   ;Force EOL
924E 4C DØ 91          JMP EOL
9251 A5 ØA      REM5   LDA LSTEOS    ;Carry LSTEOS
9253 85 FC             STA TEMP      ;to next line
9255 2Ø C5 93          JSR GETLIN    ;Get nxt ln #
9258 6Ø                RTS
```

```
9259 20 1B 94   NEXTX   JSR PUTBUF    ;Deal w NEXT stm
925C 90 07              BCC NEXTA     ;NEXT token in
925E 20 AE 93           JSR BAKTRK    ;LINBUF, branch
9261                    ;if not full else backtrack
9261                    ;to previous EOS
9261 20 39 93           JSR NEWLIN
9264 60                 RTS
9265 20 22 94   NEXTA   JSR GETOLD
9268 C9 FF              CMP #REFLIN
926A F0 15              BEQ NEXTB
926C C9 00              CMP #ENDLIN
926E F0 11              BEQ NEXTB
9270 C9 3A              CMP #COLON    ;EOS yet?
9272 F0 0D              BEQ NEXTB     ;Yes, so branch
9274 C9 2C              CMP #COMMA    ;More than one
9276                                  ;var in NEXT?
9276 D0 ED              BNE NEXTA     ;No, so branch
9278 A9 3A              LDA #COLON    ;Write a : NEXT
927A 20 1B 94           JSR PUTBUF    ;for each comma
927D A9 82              LDA #NXTTOK   ;Load NEXT into
927F D0 D8              BNE NEXTX     ;Accum, always BR
9281 20 05 94   NEXTB   JSR DECOLD    ;Backstep OLDPTR
9284 60                 RTS           ;and return
9285 20 1B 94   STRING  JSR PUTBUF    ;Deal w Quoted Str
9288 90 07              BCC COPYST    ;Put quote in LIN
928A                                  ;BUF, BR not full
928A 20 AE 93   SBAK    JSR BAKTRK    ;Full, so backtrak
928D 20 39 93           JSR NEWLIN    ;to end of prev
9290 60                 RTS           ;stm, start new
9291                                  ;line in LINBUF
9291 20 22 94   COPYST  JSR GETOLD
9294 20 1B 94           JSR PUTBUF
9297 B0 F1              BCS SBAK      ;If LINBUF full BR
9299 CA                 DEX
929A A9 22              LDA #QUOTE    ;Is char just
929C DD 00 95           CMP LINBUF,X  ;placed a quote
929F F0 03              BEQ CLQUOT    ;Yes,so branch
92A1 E8                 INX           ;Restore X-reg
92A2 D0 ED              BNE COPYST    ;Always branch
92A4 E8         CLQUOT  INX           ;Restore X-reg
92A5 60                 RTS
92A6 20 1B 94   VARIBL  JSR PUTBUF    ;Truncate var
92A9                    ;name to maximum 2 chars
92A9 90 07              BCC VAR1      ;LINBUF not full BR
92AB 20 AE 93   VBAK    JSR BAKTRK
92AE 20 39 93           JSR NEWLIN
92B1 60                 RTS
92B2 20 22 94   VAR1    JSR GETOLD    ;Get next byte
92B5 20 2A 94           JSR LETTER    ;Is it a letter?
92B8 90 05              BCC VAR2      ;Yes, so branch
92BA 20 38 94           JSR NUMBER    ;Is it a number?
92BD B0 12              BCS VAR4      ;No, so branch
92BF 20 1B 94   VAR2    JSR PUTBUF    ;Put 2nd char in
92C2 B0 E7              BCS VBAK      ;LINBUF,if full BR
92C4 20 22 94   VAR3    JSR GETOLD
92C7 20 2A 94           JSR LETTER
92CA 90 F8              BCC VAR3
92CC 20 38 94           JSR NUMBER
92CF 90 F3              BCC VAR3
92D1 20 05 94   VAR4    JSR DECOLD    ;Dec OLDPTR and
92D4 60                 RTS           ;return
92D5 A4 01      RESOLD  LDY IFFLAG    ;Reset OLDBEG
92D7 D0 08              BNE RS1       ;ptr except in
92D9 A5 B8              LDA OLDPTR    ;mid of an IF
92DB 85 05              STA OLDBEG
92DD A5 B9              LDA OLDPTR+1
92DF 85 06              STA OLDBEG+1
92E1 60         RS1     RTS
```

His COMPRESS would leave this program as it is, because although line #20 is not referenced, he says that concatenating it onto line #10:

```
(ii) 10 GOTO 50 : J = 5
     50 END
```

would cause the J = 5 statement never to be executed. This is true, but in fact, if you carefully examine the original program, (i), you will see that it will not even be executed in the original! So the program at (ii) is perfectly acceptable because it behaves identically to the original. It is perhaps preferable to (i) because it emphasizes the "dead code". As soon as you see the J = 5 appended to the GOTO statement, you can see that there is something wrong. If there is no "dead code" in your program, then all lines following a terminal statement such as GOTO, RETURN, STOP or END will always be referenced and there is no need for CMPRSS to take any special action.

(b) Removal of REMs

It is important, especially in a large program, to liberally sprinkle the program with meaningful REMarks - it makes the program listing much easier to follow. But REM statements are included in a program for documentation purposes only and serve no useful purpose during execution. In fact, the text of a REM occupies many valuable bytes of memory and often is assigned a line number of its own so that, apart from the text of the REM (one byte per character), an additional four bytes for the line number and link bytes, one byte for the REM token and one byte for the end-of-statement token are wasted. If the REM statement occupies a line of its own, then CMPRSS will remove it entirely if it is not referenced. If it is referenced but the following line is not referenced, the REM line is also removed as shown below:

```
50 GOSUB 1000
...
...
1000 REM THIS IS A SUBROUTINE
1010 A = 10
...
...
1090 RETURN
```

If line #1010 is not referenced, it does not matter whether it has line #1010 or line #1000, so the REM will be completely removed and the unreferenced line, A = 10, will be given the line number of the referenced REM. E.g.,

```
1000 A = 10
```

This does not alter the performance of the program and saves 6 bytes more than Mr. Bauers' COMPRESS which would compress the same statements as:

```
1000 REM
1010 A = 10
```

The only time that a REM token has to remain in the program is when it is a referenced REM and the following line is also referenced. E.g.,

```
15 GOSUB 500
...
...
500 REM THIS IS A REM
510 INPUT X,Y
520 IF X = 0 OR Y = 0 THEN 510
530 RETURN
```

This would compress to:

```
15 GOSUB 500
...
...
500 REM
510 INPUT X,Y : IF X = 0 OR
                Y = 0 THEN 510
530 RETURN
```

If the REM is at the end of a multistatement line, it is always removed completely and, if possible, other lines will be concatenated in its place. E.g.,

```
100 X1 = X : REM SAVE X-COORDINATE
110 Y1 = Y : REM SAVE Y-COORDINATE
120 INPUT X,Y
```

would compress as:

```
100 X1 = X : Y1 = Y : INPUT X,Y
```

a very spectacular compression of the original 68 bytes into 21 bytes! This is 70% compression.

(c) Removal of LETs

Because the two statements, LET A = B and A = B mean exactly the same thing, CMPRSS removes the unnecessary LET token, saving one byte.

```
92E2 20 FB DA   SUMARY   JSR CRDO       ;Print result of
92E5 A9 A6               LDA #< MESS1    ;cmpress to scrn
92E7 A0 94               LDY #> MESS1    ;prnt orig lngth
92E9 20 3A DB            JSR STROUT
92EC 38                  SEC
92ED A5 08               LDA OLDEOP
92EF E5 67               SBC TXTTAB
92F1 AA                  TAX
92F2 A5 09               LDA OLDEOP+1
92F4 E5 68               SBC TXTTAB+1
92F6 20 24 ED            JSR LINPRT
92F9 20 2E 93            JSR PRT1A
92FC A9 C0               LDA #< MESS2    ;prnt lngth of
92FE A0 94               LDY #> MESS2    ;compressd prog
9300 20 3A DB            JSR STROUT
9303 38                  SEC
9304 A5 AF               LDA EPROG
9306 E5 67               SBC TXTTAB
9308 AA                  TAX
9309 A5 B0               LDA EPROG+1
930B E5 68               SBC TXTTAB+1
930D 20 24 ED            JSR LINPRT
9310 20 2E 93            JSR PRT1A
9313 A9 D7               LDA #< MESS3    ;prnt # of bytes
9315 A0 94               LDY #> MESS3    ;compressed
9317 20 3A DB            JSR STROUT
931A 38                  SEC
931B A5 08               LDA OLDEOP
931D E5 AF               SBC EPROG
931F AA                  TAX
9320 A5 09               LDA OLDEOP+1
9322 E5 B0               SBC EPROG+1
9324 20 24 ED            JSR LINPRT
9327 20 2E 93            JSR PRT1A
932A 20 FB DA            JSR CRDO
932D 60                  RTS
932E A9 E7      PRT1A    LDA #< MESS1A   ;prnt the word
9330 A0 94               LDY #> MESS1A   ;bytes after the
9332 20 3A DB            JSR STROUT      ;above 3 messge
9335 20 FB DA            JSR CRDO
9338 60                  RTS
9339 A9 00      NEWLIN   LDA #ENDLIN     ;Start a new ln
933B 85 01               STA IFFLAG      ;in LINBUF, 1st
933D                     ;reset OLDBEG and IFFLAG
933D 20 D5 92            JSR RESOLD
9340 20 5F 93            JSR WRTLNK      ;Write the link
9343 A5 02               LDA NEWPTR      ;bytes at beg
9345                     ;of last compressed line
9345 85 9B               STA LSTLIN      ;Remember positn
9347 A5 03               LDA NEWPTR+1    ;of strt of new
9349 85 9C               STA LSTLIN+1    ;ln just being
934B                                      ;commenced
934B 20 F7 93            JSR DECNEW      ;reset NEWPTR
934E A2 02               LDX #$02        ;Write nxt ln #
9350 A5 FA               LDA LN1         ;at start of LINBUF
9352 9D 00 95            STA LINBUF,X
9355 E8                  INX
9356 86 04               STX LASTX       ;Init LASTX for
9358 A5 FB               LDA LN1+1       ;new line
935A 9D 00 95            STA LINBUF,X
935D E8                  INX
935E 60                  RTS
935F A0 00      WRTLNK   LDY #$00        ;Write link bytes
9361 20 E9 93            JSR INCNEW      ;at start of last
9364 A5 02               LDA NEWPTR      ;compressed line
9366 91 9B               STA (LSTLIN),Y
9368 C8                  INY
9369 A5 03               LDA NEWPTR+1
936B 91 9B               STA (LSTLIN),Y
```

```
936D 60                RTS
936E 20 5F 93  EOP     JSR WRTLNK     ;Deal with EOP
9371 20 97 D6          JSR STXTPT     ;Put $00 before
9374 A9 00             LDA #$00       ;1st byte of new
9376 A8                TAY            ;prog in case a
9377 91 B8             STA (TXTPTR),Y ;Write two
9379 91 02             STA (NEWPTR),Y ;extra $00
937B 20 E9 93          JSR INCNEW     ;bytes to new
937E 91 02             STA (NEWPTR),Y ;prog (3 in a
9380 20 E9 93          JSR INCNEW     ;row is EOP)
9383 A5 02             LDA NEWPTR
9385 85 AF             STA EPROG      ;Set new EOP ptr
9387 85 69             STA LOMEM      ;Set new LOMEM
9389 85 6B             STA ARS        ;Set new strt of
938B                                  ;array space
938B 85 6D             STA EARS       ;Set new end of
938D A5 03             LDA NEWPTR+1   ;array space
938F 85 B0             STA EPROG+1
9391 85 6A             STA LOMEM1
9393 85 6C             STA ARS+1
9395 85 6E             STA EARS+1
9397 20 E2 92          JSR SUMARY     ;Print results
939A 60                RTS            ;of compression
939B CA        TRNBUF  DEX            ;Transfer LINBUF
939C                   ;to New Program Area
939C 86 07             STX MAXX       ;Store max loop
939E A2 00             LDX #$00       ;Reset X-reg for
93A0                                  ;transfer loop
93A0 BD 00 95  LOOP1   LDA LINBUF,X   ;Load next byte
93A3                                    ;from LINBUF
93A3 20 13 94          JSR PUTNEW     ;Trans to new
93A6 E8                INX            ;program area
93A7 E4 07             CPX MAXX       ;Loop complete?
93A9 F0 F5             BEQ LOOP1      ;No, so do again
93AB 90 F3             BCC LOOP1      ;No, so do again
93AD 60                RTS
93AE A6 01     BAKTRK  LDX IFFLAG     ;Backtrk to prev
93B0                   ;EOS or start of IF statemt
93B0 D0 02             BNE BK1
93B2 A6 04             LDX LASTX      ;Reset X-reg to
93B4 A9 00     BK1     LDA #ENDLIN    ;prev EOS
93B6 20 1B 94          JSR PUTBUF
93B9 A5 05             LDA OLDBEG
93BB 85 B8             STA OLDPTR
93BD A5 06             LDA OLDBEG+1
93BF 85 B9             STA OLDPTR+1
93C1 20 9B 93          JSR TRNBUF
93C4 60                RTS
93C5 A0 02     GETLIN  LDY #$02       ;Get ln # of
93C7 B1 B8             LDA (OLDPTR),Y  ;curr old ln
n3C9 F0 1C             BEQ GET1       ;If hibyte of link-
93CB C8                INY            ;byte pair is zero
93CC                                  ;then this is EOP
93CC B1 B8             LDA (OLDPTR),Y  ;Get lobyte
93CE 85 FA             STA LN1        ;remember it
93D0 C8                INY            ;Update last
93D1                                  ;EOS byte
93D1 B1 B8             LDA (OLDPTR),Y ;Get hibyte
93D3 85 FB             STA LN+1       ;remember it
93D5 A5 FC             LDA TEMP       ;Update last
93D7                                  ;EOS byte
93D7 85 0A             STA LSTEOS     ;Get OLDPTR just
93D9 20 F0 93          JSR INCOLD     ;before 1st byte
93DC 20 F0 93          JSR INCOLD     ;of actual Apple
93DF 20 F0 93          JSR INCOLD     ;soft line
93E2 20 F0 93          JSR INCOLD
93E5 18                CLC            ;Flag not EOP
93E6 60                RTS
93E7 38        GET1    SEC            ;Flag EOP
```

(d) Removal of Variable Names from NEXT Statements

Not only does the removal of the variable name(s) associated with a NEXT token save memory, but it also enables the Applesoft interpreter to execute the FOR..NEXT loop(s) faster, because it obviates the need for it to check that the variable name refers to the currently active FOR. CMPRSS correctly performs this removal even in the instance where more than one FOR..NEXT loop terminates on the same statement:

```
100 NEXT I1, I2
```

CMPRSS will transform this into:

```
100 NEXT : NEXT
```

saving one byte for each character of each variable name removed.

(e) Truncation of Variable Names To a Maximum of 2 Characters

No longer is it necessary for you to name all your variables with meaningless names like A$, C1%, Q2 etc. to save space. You can give your variables longer, more meaningful names like AMOUNT, NAME$ etc. and retain these in the listable 'source' version for ease of understanding what the program is doing. But the Applesoft interpreter only recognizes the first 2 characters of a variable name, so variables AMOUNT and AMT would be identical as far as Applesoft is concerned. It will only recognize the AM. CMPRSS uses this fact to reduce your program as much as possible. AMOUNT becomes AM and NAME$ becomes NA$. The compressed version is hard to read, but you should never list the compressed version. It will certainly operate the same as the original, but much more efficiently. You should always keep two versions of your program, the original, readable version and the compressed one.

Executing CMPRSS

1. Type BRUN CMPRSS (RETURN). This will load CMPRSS at $9000 and reset HIMEM to protect itself. It also installs the '&' vector to enable CMPRSS to be easily run.
2. If your Applesoft program is already in memory, type & (RETURN) and your program will be compressed; otherwise key in or LOAD your Applesoft program from disk and then type & (RETURN). Compression takes a mere 5 seconds or so for the largest program.

It is important to note that you should always SAVE the "uncompressed" version BEFORE you run CMPRSS, or the valuable REMs and meaningful variable names will be lost forever.

If there are no non-existent line numbers, the display on the screen will look something like:

```
*** PASS 1 ***
*** END PASS 1 ***


*** PASS 2 ***


OLD PROGRAM LENGTH:  16224 BYTES
NEW PROGRAM LENGTH:   9528 BYTES
PROGRAM COMPRESSED BY: 6696 BYTES

*** END PASS 2 ***
```

If, however, non-existent line numbers have been encountered during Pass #1, they will be reported and your program will not be compressed. The display, in this case, will look something like this:

```
*** PASS 1 ***
8560 GOSUB4170
9000 GOTO3010
9050 THEN9095
***END PASS 1 ***


*** NOT COMPRESSED ***
```

The line numbers of the offending statements are 8560, 9000 and 9050. The non-existent lines are 4170, 3010 and 9095.

The program resides just below DOS from $9000 to $94FF and the space from $9500 to $95FF is used for the Compressed Line Buffer where the current compressed line is assembled before being written back into the Applesoft program.

Once CMPRSS is installed, your Applesoft programs may be LOADed, changed, SAVEd and CMPRSSed by merely keying & (RETURN). You can even run them and, provided that they never alter HIMEM, POKE any values into memory locations $9000 to $94FF, or alter the & vector, CMPRSS will remain unharmed and may be used again and again. If, however, you need the 1.5K bytes which CMPRSS occupies because you are running a very large program, you can reset HIMEM to just below DOS ($9600) and then, next time CMPRSS is required, you will have to BRUN it from disk again.

MICRO

```
93E8 60          RTS
93E9 E6 02  INCNEW  INC NEWPTR    ;Incr NEWPTR
93EB D0 02          BNE IN1
93ED E6 03          INC NEWPTR+1
93EF 60     IN1     RTS
93F0 E6 B8  INCOLD  INC OLDPTR    ;Incr OLDPTR
93F2 D0 02          BNE IN2
93F4 E6 B9          INC OLDPTR+1
93F6 60     IN2     RTS
93F7 18     DECNEW  CLC           ;Decr NEWPTR
93F8 A5 02          LDA NEWPTR
93FA 69 FF          ADC #$FF
93FC 85 02          STA NEWPTR
93FE A5 03          LDA NEWPTR+1
9400 85 03          ADC #$FF
9402 69 FF          STA NEWPTR+1
9404 60             RTS
9405 18     DECOLD  CLC           ;Decr OLDPTR
9406 A5 B8          LDA OLDPTR
9408 69 FF          ADC #$FF
940A 85 B8          STA OLDPTR
940C A5 B9          LDA OLDPTR+1
940E 69 FF          ADC #$FF
9410 85 B9          STA OLDPTR+1
9412 60             RTS
9413 20 E9 93 PUTNEW  JSR INCNEW  ;Store Accum in
9416 A0 00          LDY #$00      ;new prog area
9418 91 02          STA (NEWPTR),Y
941A 60             RTS
941B 9D 00 95 PUTBUF  STA LINBUF,X ;Put Accum into
941E E8             INX           ;LINBUF
941F E0 FD          CPX #$FD      ;Set if LINBUF
9421 60             RTS           ;is full
9422 20 F0 93 GETOLD  JSR INCOLD  ;Get a byte from
9425                              ;the old prog
9425 A0 00  GOTOLD  LDY #$00
9427 B1 B8          LDA (OLDPTR),Y
9429 60             RTS
942A C9 41  LETTER  CMP #LETTRA   ;Is byte a lettr
942C 90 06          BCC NOLETR    ;If < 'A' then
942E C9 5A          CMP #LETTRZ   ;not a letter
9430 90 04          BCC ISLETR    ;If < 'Z',is ltr
9432 F0 02          BEQ ISLETR    ;If = 'Z',is ltr
9434 38     NOLETR  SEC           ;Set carry,not a letter
9435 60             RTS
9436 18     ISLETR  CLC           ;Clear carry, is letter
9437 60             RTS
9438 C9 30  NUMBER  CMP #ZERO     ;Is byte number?
943A 90 06          BCC NONUMB    ;If < '0',not #
943C C9 39          CMP #NINE
943E F0 04          BEQ ISNUMB    ;If = '9',is #
9440 90 02          BCC ISNUMB    ;If < '9',is #
9442 38     NONUMB  SEC           ;Set carry,not a number
9443 60             RTS
9444 18     ISNUMB  CLC           ;Clear carry, is number
9445 60             RTS
9446 20 20 20 GOTO    ASC '   GOTO  '
944F 20 20 20 GOSUB   ASC '   GOSUB '
9458 20 20 20 THEN    ASC '   THEN '
9460 2A 2A 2A PASS1A  ASC '*** PASS 1 '
946B 2A 2A 2A PASS1B  ASC '*** END PASS1 '
9479 2A 2A 2A ERRMES  ASC '*** NOT COMPRESSED '
948C 2A 2A 2A PASS2A  ASC '*** PASS 2 '
9497 2A 2A 2A PASS2B  ASC '*** END PASS 2 '
94A6 4F 4C 44 MESS1   ASC 'OLD PROGRAM LENGTH:   '
94BC 4E 45 57 MESS2   ASC 'NEW PROGRAM LENGTH:  '
94D1 50 52 4F MESS3   ASC 'PROGRAM COMPRESSED BY '
94E7 20 20 42 MESS1A  ASC '  BYTES '
94EF          END
```

USEFUL FUNCTIONS Part 2

Save time and mathematical aggrevation with a compilation of defined functions in a very friendly program

by Paul Garrison

EDITOR'S NOTE

In last month's issue we printed a program that allowed you to easily access various defined functions. This saved time and aggravation when working with complicated mathematical formulas. As a continuation of this approach, we present the second of three programs which will put a host of valuable formulas and functions at your fingertips. Again we invite you to send in any defined functions you may be using that are not mentioned. The submissions we receive will be collected and published in a future issue.

PROGRAM #2

This program includes the formulas for trigonometric ratios, two formulas dealing with matters related to aviation (the effect of wind on ground speed and density altitude), the formulas for converting temperatures from Fahrenheit to Celsius and vice versa, plus the formulas that comprise Ohm's Law and determine the resistance factor of electrical wires, and finally the formula that determines future values based on compound interest, present value and the time span to be examined. The structure of the program is identical to the one described above.

```
1 REM FUNCTIONS (DELETE THOSE NOT USED IN A PROGRAM)
2 PI=3.14159
3 RAD=57.2958
47 DEF FNHYP(X,Y)=SQR(X↑2+Y↑2):                          REM FIND
HYPOTENUSE
48 DEF FNHX(H,Y)=SQR(H↑2-Y↑2):                           REM FIND SIDE
X,HORIZONAL
49 DEF FNVY(H,X)=SQR(H↑2-X↑2):                           REM FIND SIDE
Y,VERTICAL
5Ø DEF FNANGL(A)=9Ø-A:                                   REM FIND ANGLE A OR B
51 DEF FNX(H,A)=H*COS(A*(PI/18Ø)):                       REM FIND SIDE X
BY H
& A
52 DEF FNY(H,A)=H*SIN(A*(PI/18Ø)):                       REM FIND SIDE Y
BY H
& A
53 DEF FNB(X,Y)=(ATN(X/Y))*(18Ø/PI):                     REM FIND A OR B BY
X
& Y
6Ø DEF FNWC(WV,WD,MC,MV)=-1*WV*COS((WD-MC-MV)/RAD):       REM WIND
COMPONENT,AI CRAFT
61 DEF FNDENALT(PA,F)=(145426*(1-(((288.15-
PA*.ØØ1981)/288.15)↑5.2563/((273.15+F)/288.15))↑.235))
```

```
62                                                    REM DENSITY ALTITUDE
63 DEF FNFC(F)=(F-32)/1.8:                            REM DEG.F. TO DEG.C.
64 DEF FNCF(C)=(C*1.8)+32:                            REM DEG.C. TO DEG.F.
65 DEF FNVA(V,A)=V/A:                                 REM OHM=VOLT/AMPERE
66 DEF FNVO(V,O)=V/O:                                 REM AMP=VOLT/OHM
67 DEF FNAO(A,O)=A*O:                                 REM VOLT=AMP*OHM
68 DEF FNWR(M,L)=1Ø.4*L/M:                            REM WIRE RESISTENCE
69 DEF FNCP(PV,I,CP)=PV*(1+(I/1ØØ))↑CP:                 REM COMPOUND INTEREST1ØØ REM (PRO-
GRAM TITLE, AUTHOR)
11Ø REM (TYPE OF BASIC USED)
12Ø GOTO 2ØØ
13Ø ?"--------------------------------------------------------------------------------":RETURN
14Ø HOME:VTAB(1Ø):RETURN
15Ø ?:INPUT "Press > RETURN<  (Q to quit)   ",R$
155 IF R$="Q" THEN 16Ø ELSE RETURN
16Ø GOSUB 14Ø:GOSUB 13Ø:?TAB(33)"End.":GOSUB 13Ø:END
19Ø                                                   REM TESTING FUNCTIONS
2ØØ GOSUB 14Ø:?"Menu:":GOSUB 13Ø:?"Aviation functions:":GOSUB 13Ø
21Ø ?1,"Wind component"
22Ø ?2,"Density altitude"
222 ?3,"Convert degrees F. to degrees C."
224 ?4,"Convert degrees C. to degrees F.":GOSUB 13Ø
23Ø ?"Ratios for right triangles:":GOSUB 13Ø
24Ø ?5,"Find hypotenuse"
25Ø ?6,"Find horizontal side (X)"
26Ø ?7,"Find vertical side (Y)"
27Ø ?8,"Find angles A and B"
28Ø ?9,"Find two sides (X & Y) by hypotenuse & angle"
29Ø ?1Ø,"Find angles A and B by X and Y":GOSUB 13Ø
291 ?"Electrical:":GOSUB 13Ø
292 ?11,"Find ohms"
293 ?12,"Find amperes"
294 ?13,"Find volts"
295 ?14,"Find wire resistence":GOSUB 13Ø
296 ?15,"Compound interest":GOSUB 13Ø
3ØØ ?16,"Exit program":GOSUB 13Ø
31Ø INPUT "Which?          ",WHICH:GOSUB 14Ø
32Ø ON WHICH GOTO 4ØØ,5ØØ,6ØØ,7ØØ,2ØØØ,2Ø5Ø,21ØØ,215Ø,219Ø,228Ø,24ØØ,25ØØ,26ØØ,27ØØ,28ØØ,16Ø
4ØØ ?"Find wind component (effect on aircraft in flight)":GOSUB 13Ø
41Ø INPUT "Wind direction?                    ",WD
42Ø INPUT "Wind velocity? (knots)             ",WV
43Ø INPUT "Magnetic course?                   ",MC
44Ø INPUT "Magnetic variation?  (E= - / W= +)  ",MV
45Ø X=FNWC(WV,WD,MC,MV):GOSUB 13Ø
46Ø ?"The wind component factor is          ";X:GOSUB 15Ø:GOTO 2ØØ
5ØØ ?"Find the density altitude":GOSUB 13Ø
51Ø INPUT "Pressure altitude?                  ",PA
52Ø INPUT "Temperature? (degrees centigrade)   ",F
53Ø X=FNDENALT(PA,F):GOSUB 13Ø
54Ø ?"The density altitude is ";X;" feet.":GOSUB 15Ø:GOTO 2ØØ
6ØØ ?"Convert degrees F. to degrees C.":GOSUB 13Ø
61Ø INPUT "Degrees F.?                        ",F
62Ø X=FNFC(F):GOSUB 13Ø
63Ø ?F;" degrees F. equal ";X;" degrees C":GOSUB 15Ø:GOTO 2ØØ
7ØØ ?"Convert degrees C. to degrees F.":GOSUB 13Ø
71Ø INPUT "Degrees C.?                        ",C
72Ø X=FNCF(C):GOSUB 13Ø
73Ø ?C;" degrees C. equal ";X;" degrees F.":GOSUB 15Ø:GOTO 2ØØ
2ØØØ ?"Find the length of the hypotenuse of a right triangle":GOSUB 13Ø
2Ø1Ø INPUT "Enter the horizontal length (X)    ",X
```

```
2020 INPUT "Enter the vertical length   (Y)       ",Y
2030 X=FNHYP(X,Y):GOSUB 130
2040 ?"The length of the hypotenuse is       ";X:GOSUB 150:GOTO 200
2050 ?"Find the length of the horizontal side (X) of a right triangle":GOSUB 130
2060 INPUT "Enter the vertical length   (Y)       ",Y
2070 INPUT "Enter the diagonal length (hypotenuse)",H
2080 X=FNHX(H,Y):GOSUB 130
2090 ?"The horizontal length is              ";X:GOSUB 150:GOTO 200
2100 ?"Find the length of the vertical side (Y) of a right triangle":GOSUB 130
2110 INPUT "Enter the horizontal length (X)       ",X
2120 INPUT "Enter the diagonal length (hypotenuse)",H
2130 XX=FNVY(H,X):GOSUB 130
2140 ?"The vertical length is                ";XX:GOSUB 150:GOTO 200
2150 ?"Find the angle opposite side X or Y in a right triangle":GOSUB 130
2160 INPUT "Enter degrees of one angle            ",A
2170 X=FNANGL(A):GOSUB 130
2180 ?"The other angle is ";X;" degrees":GOSUB 150:GOTO 200
2190 ?"Find the two other sides by hypotenuse and the angle"
2195 ?"between the hypotenuse and the horizontal side":GOSUB 130
2200 INPUT "Enter length of hypotenuse            ",H
2210 INPUT "Enter the degrees of the angle        ",A
2220 X=FNX(H,A):GOSUB 130
2225 XX=FNY(H,A)
2230 ?"The horizontal length is               ";X
2275 ?"The vertical side is                   ";XX:GOSUB 150:GOTO 200
2280 ?"Find the degrees of two angles by sides X and Y":GOSUB 130
2290 INPUT "Enter horizontal side (X)             ",X
2300 INPUT "Enter vertical side   (Y)             ",Y
2310 XX=FNB(X,Y):GOSUB 130
2320 ?"Angle A (opposite X) is ";XX;" degrees":BB=90-XX
2330 ?"Angle B (opposite Y) is ";BB;" degrees":GOSUB 150:GOTO 200
2400 ?"Find ohms by volts and amperes":GOSUB 130
2410 INPUT "Volts?                                ",V
2420 INPUT "Amperes?                              ",A
2430 X=FNVA(V,A):GOSUB 130
2440 ?X;" ohms":GOSUB 150:GOTO 200
2500 ?"Find amperes by volts and ohms":GOSUB 130
2510 INPUT "Volts?                                ",V
2520 INPUT "Ohms?                                 ",O
2530 X=FNVO(V,O):GOSUB 130
2540 ?X;" amperes":GOSUB 150:GOTO 200
2600 ?"Find volts by amperes and ohms":GOSUB 130
2610 INPUT "Amperes?                              ",A
2620 INPUT "Ohms?                                 ",O
2630 X=FNAO(O,A):GOSUB 130
2640 ?X;" volts":GOSUB 150:GOTO 200
2700 ?"Find wire resistence by length and mils":GOSUB 130
2710 INPUT "Length of wire (inches)               ",L
2720 INPUT "Diameter of wire (mils)               ",M
2730 X=FNWR(M,L):GOSUB 130
2740 ?"Resistence is ";X;" ohms":GOSUB 150:GOTO 200
2800 ?"Find future value based on interest and compounding periods":GOSUB 130
2810 INPUT "Present value?                              $",PV
2820 INPUT "Annual interest rate?                       %",I
2830 INPUT "Compounding periods (day/month/year)(D/M/Y) ",CP$
2840 IF CP$="D" THEN I=I/365.25
2850 IF CP$="M" THEN I=I/12
2860 INPUT "Period of how many years?                   ",CP
2870 IF CP$="D" THEN CP=CP*365.25
2875 IF CP$="M" THEN CP=CP*12
2880 X=FNCP(PV,I,CP):GOSUB 130
2890 ?"The future value is $";X:GOSUB 150:GOTO 200
```

Commodore to Apple Cassette File Loader

by Art Matheny

Your Apple can read cassette files written by a Commodore VIC-20 or C64 computer with this assembly language program . The file is written into a sequential text file on the Apple's disk. Three types of files are discussed--data files, BASIC programs, and memory ranges.

Requires: Apple II with disk drive and optional printer, Commodore VIC-20 or C64 with C2N cassette drive.

I have a Commodore VIC-20 and a C64 as well as my trusty old Apple II. Of course I have a disk drive for the Apple, but for mass storage with the Commodores I use a C2N cassette tape drive ("Datassette") which works amazingly well. This article shows how the Apple can read cassette files written by either Commodore computer. The method described here can be used to transfer various kinds of data. For example, since I do not presently have an interface to connect my printer to my Commodores, I am using this utility to move BASIC programs to my Apple, where I can make hardcopy listings. It also saves a lot of retyping when I want to convert a Commodore BASIC program to Applesoft. Sorry, though, this program only goes one way. I have not yet taught the Apple to write cassette files that Commodore computers can read, but, with the information given here, I think such a program would not be very difficult to do.

The assembler listing of the main program is shown in Listing 1.

Listing 1

```
                ;COMMODORE-TO-APPLE CASSETTE FILE LOADER
                ;
                ;BY ART MATHENY
                ;
                ; Copyright © 1984
                ; The Computerist, Inc.
                ; Chelmsford, MA Ø1824
                ;
                ;RUNS ON APPLE II.
                ;LOADS A TEXT FILE FROM A
                ;CASSETTE TAPE WRITTEN BY A
                ;COMMODORE COMPUTER, AND SAVES
                ;IT AS AN APPLE DISK FILE.
                ;
                ;CONSTANTS
                ;
ØØØ6            SLOT    EQU 6       ;SLOT # FOR SAVING FILE
ØØØ1            DRIVE   EQU 1       ;DRIVE # FOR SAVING FILE
ØØCØ            BLOKLEN EQU 192     ;# OF CHARS IN A BLOCK
ØØ1E            NAMLEN  EQU 3Ø      ;# OF CHARS IN FILE NAME
                ;
                ;PAGE Ø VARIABLES
                ;
ØØØ6            BYTE    EQU 6       ;BYTE NOW BEING READ
ØØØ7            TEMP    EQU 7       ;ZPAGE TEMP STORAGE
ØØØ8            PTR     EQU 8       ;POINTER INTO DATA BUFFER
ØØØA            ADR     EQU $A      ;ADDR OF MESSAGE TO PRINT
ØØØC            FMPL    EQU $C      ;FILE MGR PARMLIST POINTER
                ;
                ;PAGE 3 VARIABLES
                ;
Ø3ØØ            CHSUM   EQU $3ØØ    ;CHECK SUM BYTE
Ø3Ø1            PAR     EQU $3Ø1    ;PARITY
Ø3Ø2            KNT     EQU $3Ø2    ;BIT COUNTER
Ø3Ø3            SCAN    EQU $3Ø3    ;FLAG: DOING SECOND SCAN
Ø3Ø4            KDOWN   EQU $3Ø4    ;COUNT-DOWN COUNTER
Ø3Ø5            START   EQU $3Ø5    ;ADDR WHERE BLOCK STARTS
Ø3Ø7            FIN     EQU $3Ø7    ;ADDR WHERE BLOCK ENDS
                ;
                ;DOS SYSTEM CALLS
                ;
Ø3DC            LOCFPL  EQU $3DC    ;LOCATE PARMLIST ADDR
Ø3D6            DOSFM   EQU $3D6    ;DOS FILE MANAGER
                ;
                ;OTHER ADDRESSES
                ;
Ø8Ø1            LOMEM   EQU $8Ø1    ;START OF USABLE MEMORY
Ø8Ø6            NAME    EQU LOMEM+5   ;FILENAME LOCATION
Ø8C2            BODY    EQU LOMEM+BLOKLEN+1 ;START OF FILE
CØ6Ø            TAPEIN  EQU $CØ6Ø ;CASSETTE INPUT PORT
                ;
                ;ROM ROUTINES
                ;
```

Listing 1 *(continued)*

```
FC58          HOME    EQU $FC58 ;CLEAR TEXT SCREEN
FDDA          PRBYTE  EQU $FDDA ;PRINT A HEX BYTE
FDFØ          COUT1   EQU $FDFØ ;OUTPUT TO SCREEN
              ;
              ;-------------------------------
9ØØØ                  ORG $9ØØØ
              ;-------------------------------
              ;
              ;SET IRQ MASK TO PREVENT INTERRUPTS
              ;
9ØØØ 78       PROG    SEI
              ;
              ;PRINT HEADING
              ;
9ØØ1 2Ø 58 FC         JSR HOME
9ØØ4 A9 A3            LDA #MESG5
9ØØ6 85 ØA            STA ADR
9ØØ8 A9 91            LDA /MESG5
9ØØA 85 ØB            STA ADR+1
9ØØC 2Ø 62 93         JSR PRMESG
              ;
              ;PUT 1ST BLOCK AT BEGINNING OF THE BUFFER
              ;
9ØØF A9 Ø1            LDA #LOMEM    ;FIN = LOMEM
9Ø11 8D Ø7 Ø3         STA FIN
9Ø14 A9 Ø8            LDA /LOMEM
9Ø16 8D Ø8 Ø3         STA FIN+1
              ;
              ;-------------------------------
              ;SET UP POINTERS FOR NEXT BLOCK
              ;-------------------------------
              ;
9Ø19 AD Ø7 Ø3 LOOP    LDA FIN       ;START = OLD FIN
9Ø1C 8D Ø5 Ø3         STA START     ;START —>
9Ø1F 18               CLC           ; START OF BLOCK
9Ø2Ø 69 CØ            ADC #BLOKLEN  ;FIN = START+BLOKLEN
9Ø22 8D Ø7 Ø3         STA FIN       ;FIN —>
9Ø25 AD Ø8 Ø3         LDA FIN+1     ; END OF BLOCK + 1
9Ø28 8D Ø6 Ø3         STA START+1
9Ø2B 69 ØØ            ADC #Ø
9Ø2D 8D Ø8 Ø3         STA FIN+1
9Ø3Ø C9 9Ø            CMP /PROG     ;BUFFER FULL
9Ø32 BØ 36            BCS ERR9      ;IF SO, QUIT READING
              ;
              ;-------------------------------
              ;READ A BLOCK
              ;-------------------------------
              ;
9Ø34 A9 ØØ            LDA #Ø        ;SCAN=Ø:
9Ø36 8D Ø3 Ø3         STA SCAN      ; LOAD THE BLOCK
9Ø39 2Ø 19 92         JSR BLOCK
9Ø3C A9 Ø1            LDA #1        ;SCAN=1:
9Ø3E 8D Ø3 Ø3         STA SCAN      ; VERIFY THE BLOCK
9Ø41 2Ø 19 92         JSR BLOCK
9Ø44 A9 2E            LDA #'.'      ;PRINT A PERIOD
9Ø46 2Ø FØ FD         JSR COUT1
              ;
              ;-------------------------------
              ;CHECK FOR END OF FILE
              ;-------------------------------
              ;
9Ø49 AD Ø5 Ø3         LDA START     ;PTR = START
9Ø4C 85 Ø8            STA PTR
9Ø4E AD Ø6 Ø3         LDA START+1
9Ø51 85 Ø9            STA PTR+1
9Ø53 AØ ØØ            LDY #Ø        ;LOOK AT 1ST CHAR
9Ø55 B1 Ø8            LDA (PTR),Y   ; OF BLOCK
9Ø57 C9 Ø5            CMP #5        ;EOF MARKER
9Ø59 FØ 31            BEQ EOFMARK   ;BRANCH IF SO
9Ø5B C9 Ø2            CMP #2        ;DATA BLOCK
9Ø5D DØ BA            BNE LOOP      ;BRANCH IF NOT
```

Apple has less than 48K of memory, move the origin down to fit the program below DOS, but start it at the beginning of a memory page. Moving the origin will change the machine code for every JSR and JMP.

There are three types of files which I would like to transfer--data files, BASIC programs, and memory ranges. It will be sufficient, though, to transfer data files because, as will be shown later, BASIC programs and memory dumps can both be converted into data files prior to the transfer.

Transfer of Data Files

With a Commodore computer, any kind of data can be written into a tape file. To see how this is done, let's work through a simple example. First put a scratch cassette in the C2N tape drive and either rewind it to the beginning or record the tape counter value. A filename must be selected, say "ANYFILE". A logical file number between 1 and 127 must also be selected. In the following example, the logical file number is 5:

```
OPEN 5,1,2,"ANYFILE"
```

The device number is 1, which denotes the cassette drive. The 2 indicates an intention to write to the file and to put an end-of-file marker at the end. Once the file has been opened, data can be written to it with PRINT # statements such as the following:

```
PRINT    #5,"ANY    CHARACTER
STRING";CHR$(13)
FOR K=1 TO 1Ø : PRINT #5,K;CHR$(13)
: NEXT
```

Since more than one file can be open at once (i.e. on other devices), the logical file number, 5 in this example, must be specified. When the program is finished writing, it should close the file:

```
CLOSE 5
```

The logical file number used here indicates which file is to be closed. The data file on the tape is now ready for transfer.

Rewind the tape to the beginning of the file and move the tape to a tape player connected to the Apple's cassette input. Now BRUN the cassette file loader. Figure 1 shows the Apple's TV display after a successful load operation. The program prints a period for every "block" that it reads successfully. That lets you know that it is still working, which is a comfort when long files are being loaded.

```
TEXT FILE READER

ROLL TAPE
..END OF FILE
SAVING:
ANYFILE

DONE
```

Figure 1. Typical video display of CTACFL.

If anything goes wrong, the program prints an error message and executes a "break" instruction, thus leaving you in the monitor. To try again, rewind the tape and enter:

9000G

The most likely cause of any error is a misreckoning of the loudness control of the tape player. This is a very touchy setting, and it may take several trials to find the right spot. My advice is to start very loud and to work down in small increments. Other causes of error are less likely. It is possible that there may actually be bad data on the tape, in which case you have to go back to the Commodore and save the file again. Test the Commodore C2N tape drive by saving and then verifying any BASIC program. Maybe the tape medium is bad; try a different tape. If all else fails, try a different tape player, preferably one that is not so noisy.

Listing the File

The cassette file loader puts the data into a sequential text file on the disk. The program in Listing 2, called TEXTLISTER, can list this or any other sequential file. The output can be directed either to the TV or to a printer. RUN this program and give the name of the data file. Compare the output with what the original Commodore program wrote. Such data files can be used as input for Apple programs. See the chapter on sequential files in *The DOS Manual*.

TEXTLISTER replaces any unprintable characters by an "@" sign to show at least that there is a character present.

BASIC Programs

Although there are similarities in syntax between Commodore BASIC

Listing 1 *(continued)*

```
                        ;
                        ;SEARCH THE BLOCK FOR FILE TERMINATION BYTE
                        ;
905F A0 BF                      LDY #BLOKLEN-1
9061 B1 08              F1      LDA (PTR),Y
9063 F0 2D                      BEQ HOMERUN     ;FILE TERMINATION
9065 88                         DEY             ; BYTE = 0
9066 D0 F9                      BNE F1
9068 F0 AF                      BEQ LOOP        ;BRANCH ALWAYS
                        ;
                        ;*****<       END OF FILE       >*****
                        ;*****<  SAVE THE DATA ON DISK  >*****
                        ;
                        ;-------------------------------
                        ;PRINT "BUFFER FULL"
                        ;-------------------------------
                        ;
906A A9 78              ERR9    LDA #MESG9
906C 85 0A                      STA ADR
906E A9 90                      LDA /MESG9
9070 85 0B                      STA ADR+1
9072 20 62 93                   JSR PRMESG
9075 4C 9D 90                   JMP FNAME
9078 C2 D5 C6           MESG9   ASC "BUFFER FULL"
9083 8D                         BYT $8D         ;<RETURN>
9084 D3 C1 D6                   ASC "SAVING:"
908B 00                         BYT 0
                        ;
                        ;-------------------------------
                        ;HIT EOF MARKER BLOCK
                        ;-------------------------------
                        ;
908C A9 00              EOFMARK LDA #0          ;INSERT ZERO
908E A0 01                      LDY #1          ; INTO DATA
9090 91 08                      STA (PTR),Y
                        ;
                        ;-------------------------------
                        ;PRINT"END OF FILE"
                        ;-------------------------------
                        ;
9092 A9 CC              HOMERUN LDA #MESG6
9094 85 0A                      STA ADR
9096 A9 91                      LDA /MESG6
9098 85 0B                      STA ADR+1
909A 20 62 93                   JSR PRMESG
                        ;
                        ;-------------------------------
                        ;FIND FILE NAME
                        ;-------------------------------
                        ;
909D A9 06              FNAME   LDA #NAME       ;ADR = NAME
909F 85 0A                      STA ADR         ;ADR -->
90A1 A9 08                      LDA /NAME       ; HEADER FILE NAME
90A3 85 0B                      STA ADR+1
                        ;
                        ;IS A FILENAME PRESENT
                        ;
90A5 A0 1D                      LDY #NAMLEN-1
90A7 B1 0A              FNAME1  LDA (ADR),Y
90A9 C9 20                      CMP #$20        ;SPACE
90AB D0 0B                      BNE FNAME2
90AD 88                         DEY
90AE 10 F7                      BPL FNAME1
                        ;
                        ;IF NOT, USE DEFAULT NAME
                        ;
90B0 A9 FB                      LDA #DFALT      ;ADR = DFALT
90B2 85 0A                      STA ADR
90B4 A9 91                      LDA /DFALT
90B6 85 0B                      STA ADR+1
```

Listing 1 *(continued)*

```
                    ;
                    ;PRINT THE FILENAME
                    ;
90B8 A0 00          FNAME2  LDY #0
90BA A2 1E                  LDX #NAMLEN
90BC B1 0A          FNAME3  LDA (ADR),Y
90BE 09 80                  ORA #$80        ;SET BIT 7
90C0 91 0A                  STA (ADR),Y
90C2 20 F0 FD               JSR COUT1
90C5 C8                     INY
90C6 CA                     DEX
90C7 D0 F3                  BNE FNAME3
                    ;
                    ;-----------------------------------
                    ;LOCATE PARMLIST
                    ;-----------------------------------
                    ;
90C9 20 DC 03               JSR LOCFPL
90CC 84 0C                  STY FMPL        ;FMPL-->
90CE 85 0D                  STA FMPL+1      ; FILE MGR PARMLIST
                    ;
                    ;-----------------------------------
                    ;PUT FILE NAME IN PARMLIST
                    ;-----------------------------------
                    ;
90D0 A5 0A                  LDA ADR
90D2 A0 08                  LDY #8
90D4 91 0C                  STA (FMPL),Y
90D6 A5 0B                  LDA ADR+1
90D8 C8                     INY
90D9 91 0C                  STA (FMPL),Y
                    ;
                    ;-----------------------------------
                    ;OPEN THE OUTPUT FILE
                    ;-----------------------------------
                    ;
90DB A9 01                  LDA #1          ;CALL TYPE 1 = OPEN
90DD A0 00                  LDY #0
90DF 91 0C                  STA (FMPL),Y
90E1 A9 00                  LDA #0
90E3 A0 02                  LDY #2
90E5 91 0C                  STA (FMPL),Y
90E7 C8                     INY
90E8 91 0C                  STA (FMPL),Y
90EA C8                     INY
90EB 91 0C                  STA (FMPL),Y
90ED A0 07                  LDY #7
90EF 91 0C                  STA (FMPL),Y  ;TEXT FILE
90F1 A9 01                  LDA #DRIVE
90F3 A0 05                  LDY #5
90F5 91 0C                  STA (FMPL),Y
90F7 A9 06                  LDA #SLOT
90F9 C8                     INY
90FA 91 0C                  STA (FMPL),Y
                    ;
                    ;PUT BUFFER ADDRESSES IN PARMLIST
                    ;
90FC A9 76                  LDA #WORKAREA
90FE A0 0C                  LDY #$C
9100 91 0C                  STA (FMPL),Y
9102 A9 93                  LDA /WORKAREA
9104 C8                     INY
9105 91 0C                  STA (FMPL),Y
9107 A9 A3                  LDA #SECTOR
9109 C8                     INY
910A 91 0C                  STA (FMPL),Y
910C A9 93                  LDA /SECTOR
910E C8                     INY
```

and Applesoft BASIC, most programs written for a Commodore computer will require extensive revisions before they will run on an Apple. The cassette file loader could save a lot of retyping, though, by moving programs verbatim from the Commodore to the Apple. First, the BASIC program must be converted to a data file so that it can be transferred. The procedure is straightforward:

1. LOAD the program into the Commodore in the usual way.

2. Remove the program tape and put in a "scratch" tape.

3. Enter the following commands in immediate execution mode:

```
OPEN 1,1,2,"FILENAME.TXT"
CMD 1
LIST
PRINT #1
CLOSE 1
```

This writes the program listing into a data file on the tape. It does not make a copy of the original BASIC file, but rather a replica of the program *listing* just as it would appear on the TV. Do not panic if the LIST step above takes 3 times as long as you would expect.

4. Rewind the scratch tape and physically move it to the Apple's cassette tape player.

5. BRUN the cassette file loader and play the file through.

6. You now have a text file on the disk called "FILENAME.TXT". TEXTLISTER can be used to list it. It can be edited with any text editor that can work with "T" type files. In this step it is only necessary to fix the syntax so that it looks like an Applesoft program. Delete the extraneous lines at the beginning and end of the file. Change every "SYS" to "CALL". Make any other changes needed to make it conform to legal Applesoft syntax. It is not essential for the program to be *logically* correct at this point. Save the edited file.

7. Go into Applesoft, give a NEW command if necessary and then (here comes the exciting part) EXEC the text file. This step enters the text file just as if you were typing the whole thing.

8. The program is now in memory, and you can LIST it. Give it a name and save it. As a convention, I use the same filename without the ".TXT" suffix. Note that this program now shows up as an "A" type file in the catalog.

9. This program can be worked just like any other Applesoft program, so do whatever it takes to get it running on the Apple.

Memory Dumps & Dissassembly

It is also possible to transfer a range of memory from a Commodore to an Apple. Again, the trick is to first generate a data file. The program in Listing 3 is a Commodore BASIC program which does this. The user is asked to specify the starting and ending addresses of the memory range as well as a file name for the tape file. It then PEEKs each byte of the range and writes that value (as decimal digits) into the tape file. This serves as a useful example of the procedure discussed above for creating a data file. It also serves as an example of a BASIC program that has been transferred to the Apple to get a hardcopy listing, but the listing shown here has been doctored slightly. (The word "CLR" in line 10 was inserted by hand.)

The memory range is written into a data file on the tape. The tape is transferred to the other tape player and loaded into the Apple by the cassette file loader. The data is then loaded into the Apple's memory by the Applesoft program in Listing 4. Note that it does not necessarily have to be loaded into the same address range from whence it came. Use BSAVE to save the memory range as a conventional "B" type file if you wish. The disassembler of the monitor or autostart ROM will work on this.

Commodore Tape Format

This part gets technical, so I am going to start by defining a few terms.

A *cycle* is a complete wave cycle (both half-cycles; for a square wave, both the down and the up phases).

The *duration* of a cycle is the total time spanned by a complete cycle (both half-cycles).

There are 3 kinds of *bits*, each consisting of 2 cycles of different durations. The following table gives approximate cycle durations in microseconds:

	1st cycle	2nd cycle
"1" BIT	500 μs	333 μs
"0" BIT	333	500
SYNC	667	500

Listing 1 *(continued)*

```
910F 91 0C              STA (FMPL),Y
9111 A9 A3              LDA #BUFFER
9113 C8                 INY
9114 91 0C              STA (FMPL),Y
9116 A9 94              LDA /BUFFER
9118 C8                 INY
9119 91 0C              STA (FMPL),Y
911B A2 00              LDX #0          ;NEW FILE IS OK
911D 20 D6 03           JSR DOSFM
9120 B0 6E              BCS DOSERR
                ;
                ;-------------------------------
                ;POSITION FILE AT START
                ;-------------------------------
                ;
9122 A9 0A              LDA #$A         ;CALL TYPE $A =
9124 A0 00              LDY #0          ; POSITION
9126 91 0C              STA (FMPL),Y
9128 A9 00              LDA #0
912A A0 04              LDY #4
912C 91 0C              STA (FMPL),Y
912E C8                 INY
912F 91 0C              STA (FMPL),Y
9131 A2 01              LDX #1
9133 20 D6 03           JSR DOSFM
9136 B0 58              BCS DOSERR

                ;
                ;-------------------------------
                ;WRITE THE DATA
                ;-------------------------------
0               ;
9138 A9 04              LDA #4          ;CALL TYPE 4 = WRITE
913A A0 00              LDY #0
913C 91 0C              STA (FMPL),Y
913E A9 01              LDA #1          ;ONE BYTE AT A TIME
9140 C8                 INY
9141 91 0C              STA (FMPL),Y
                ;
                ;INITIALIZE BUFFER POINTER TO
                ;1ST BYTE OF ACTUAL DATA
                ;
9143 A9 C2              LDA #BODY       ;PTR --> BODY
9145 85 08              STA PTR
9147 A9 08              LDA /BODY
9149 85 09              STA PTR+1
                ;
                ;SKIP EVERY 192ND BYTE (BLOCK-TYPE TOKENS)
                ;
914B A2 BF      PRINT1  LDX #BLOKLEN-1
914D 8E 02 03           STX KNT         ;CHAR COUNTER
9150 A0 00      PRINT2  LDY #0
9152 B1 08              LDA (PTR),Y
                ;
                ;WATCH FOR END OF FILE,
                ;WHICH IS MARKED BY A ZERO BYTE
                ;
9154 F0 21              BEQ WRAPUP      ;BRANCH IF ZERO
9156 09 80              ORA #$80        ;SET BIT 7
9158 A0 08              LDY #8
915A 91 0C              STA (FMPL),Y    ;BYTE TO BE WRITTEN
915C A2 01              LDX #1
915E 20 D6 03           JSR DOSFM       ;< WRITE THE BYTE >
9161 B0 2D              BCS DOSERR      ;BRANCH IF ERROR
                ;
                ;INCREMENT BUFFER POINTER
                ;
9163 E6 08              INC PTR
9165 D0 02              BNE PRINT3
9167 E6 09              INC PTR+1
```

Listing 1 *(continued)*

```
9169 CE Ø2 Ø3   PRINT3   DEC KNT        ;SKIP 1ST BYTE
916C DØ E2               BNE PRINT2     ;OF EACH BLOCK
916E E6 Ø8               INC PTR
9170 DØ D9               BNE PRINT1
9172 E6 Ø9               INC PTR+1
9174 DØ D5               BNE PRINT1
9176 ØØ                  BRK
                 ;
                 ;-------------------------------
                 ;CLOSE OUTPUT FILE
                 ;-------------------------------
                 ;
9177 A9 Ø2       WRAPUP  LDA #2          ;CALL TYPE 2 = CLOSE
9179 AØ ØØ               LDY #Ø
917B 91 ØC               STA (FMPL),Y
917D A2 Ø1               LDX #1
917F 2Ø D6 Ø3            JSR DOSFM
9182 BØ ØC               BCS DOSERR
                 ;
                 ;-------------------------------
                 ;PRINT"DONE" AND EXIT TO BASIC
                 ;-------------------------------
                 ;
9184 A9 EØ               LDA #MESG7
9186 85 ØA               STA ADR
9188 A9 91               LDA /MESG7
918A 85 ØB               STA ADR+1
918C 2Ø 62 93            JSR PRMESG
918F 6Ø                  RTS            ;EXIT
                 ;
                 ;-------------------------------
                 ;DOS ERROR
                 ;-------------------------------
                 ;
9190 A9 EA       DOSERR  LDA #MESG8
9192 85 ØA               STA ADR
9194 A9 91               LDA /MESG8
9196 85 ØB               STA ADR+1
9198 2Ø 62 93            JSR PRMESG
919B AØ ØA               LDY #$A
919D B1 ØC               LDA (FMPL),Y   ;ERROR CODE
919F 2Ø DA FD            JSR PRBYTE     ;PRINT THE HEX CODE
91A2 ØØ                  BRK            ;ABANDON SHIP
                 ;
                 ;-------------------------------
                 ;MESSAGES
                 ;-------------------------------
                 ;
91A3 AØ AØ AØ    MESG5   ASC "           "
91AF D4 C5 D8            ASC "TEXT FILE LOADER"
91BF 8D 8D 8D            BYT $8D,$8D,$8D
91C2 D2 CF CC            ASC "ROLL TAPE"
91CB ØØ                  BYT Ø
91CC C5 CE C4    MESG6   ASC "END OF FILE"
91D7 8D                  BYT $8D
91D8 D3 C1 D6            ASC "SAVING:"
91DF ØØ                  BYT Ø
91EØ 8D 8D       MESG7   BYT $8D,$8D
91E2 C4 CF CE            ASC "DONE"
91E6 8D 8D 8D            BYT $8D,$8D,$8D,Ø
91EA 8D          MESG8   BYT $8D
91EB C4 CF D3            ASC "DOS ERROR CODE:"
91FA ØØ                  BYT Ø
                 ;
                 ;-------------------------------
                 ;DEFAULT FILE NAME (3Ø CHARS)
                 ;-------------------------------
                 ;
91FB C3 CF CD    DFALT   ASC "COMMODORE FILE "
920A AØ AØ AØ            ASC "               "
                 ;
```

Note that the "1" and "0" bit have the same total duration. A byte of data is coded as follows:

sync bit
8 data bits (LSB first...MSB last)
parity bit

The parity bit is "1" if the byte parity is even and "0" if the parity is odd. Figure 2 shows a typical byte frame.



Figure 2. Example of tape format for a single byte. The SYNC bit is followed by 8 data bits with the least significant bit first. The value of this byte is thus $AC in hex. The last bit on the right is the parity bit. Since in this case the number of "1" bits is even, the parity is even, so the parity bit is "1". The parity bit helps to check for errors.

I will use the term "block" to describe the next level of structure. A block contains all the information in the cassette buffer, which is 192 bytes. The format of a block is as follows:

leader tone of continuous 333 microsecond cycles
9 count-down bytes, $89...$81
192 data bytes
checksum byte
a single 667 microsecond cycle
about 80 cycles of 333 microseconds (spacer)
9 count-down bytes, 9...1
data bytes (repeated)
checksum byte
a single 667 microsecond cycle
about 80 cycles of 333 microseconds (trailer)

The checksum byte is the EOR of all of the data bytes in the block.

A "file" is simply a sequence of blocks. The first block in the file is a header which contains the file name. The last block is a special End-Of-File marker block, although this can be omitted. The actual end of the file is indicated by a zero byte in the data after the last legitimate character in the final data block.

Overview of the Program

Toward the end of Listing 1 is a subroutine labeled "GETBIT". It watches the cassette input (TAPEIN) for two cycles (down, up, down, up).

The x-register measures the duration of the first cycle, and the y-register measures the duration of the second cycle. A comparison of the two tells whether it is a "1" or a "0". The bit is left in the carry flag so that it can easily be rotated into the data byte.

Obviously, the timing of this program is critical because the cycle durations are measured by counting trips through program loops. That is why the interrupt disable flag is set (SEI instruction) at the top of the program. However, any peripheral device which still slows down the 6502 will interfere with this program and must be removed.

The subroutine labeled "BLOCK" reads any block from a Commodore tape and adds it to a memory buffer. The memory buffer used here begins at $801 and extends to $8FFF. Since the data field is repeated on the tape, the program verifies that the second occurrence of the data matches what is in memory.

The end of the file is signaled by a zero byte in the data field. When the file is fully loaded, the program writes a "T" type file with the same name as it finds in the file header. If no name is found, the default name "COMMODORE FILE" is used.

This program uses the DOS File Manager for all disk operations. *Beneath Apple DOS* by Don Worth and Pieter Lechner explains in detail how to use the File Manager from assembly language.

Summary

Although there may be less cumbersome ways to transfer data between computers, I went with this method because it didn't cost me any money. One could call it a poor man's modem. The success of this program demonstrates the possibility of two other cheap tricks: (1) It should be possible for the Apple to write tape files that are readable by Commodore computers. (2) It should also be possible to have a direct link between the Commodore cassette interface and the Apple cassette interface. The read and write lines would, of course, be crossed over. In addition there would have to be a signal ground connection and a fourth connection from an annunciator output of the Apple's game port to the cassette sense input of the Commodore's cassette port. The latter connection would allow the Apple to simulate the button-down condition of the C2N tape drive.

Listing 1 *(continued)*

```
                        ;*****************
                        ;*               *
                        ;*  SUBROUTINES  *
                        ;*               *
                        ;*****************
                        ;
                        ;-------------------------------
                        ;READ A BLOCK
                        ;-------------------------------
                        ;
                        ;INITIALIZE POINTER & CHECKSUM
                        ;
9219 AD Ø5 Ø3  BLOCK    LDA START       ;PTR = START
921C 85 Ø8              STA PTR         ;PTR -->
921E AD Ø6 Ø3           LDA START+1     ; START OF BLOCK
9221 85 Ø9              STA PTR+1
9223 A9 ØØ              LDA #Ø
9225 8D ØØ Ø3           STA CHSUM
                        ;
                        ;READ COUNT-DOWN BYTES
                        ;
9228 A9 Ø9              LDA #9          ;9 COUNT-DOWN BYTES
922A 8D Ø4 Ø3           STA KDOWN       ;COUNTER
922D A2 Ø6      BLOCK1  LDX #6
922F 2Ø DA 92           JSR RDBYTE1
9232 A5 Ø6              LDA BYTE
9234 29 7F              AND #$7F        ;CLEAR BIT 7
9236 CD Ø4 Ø3           CMP KDOWN       ;IS IT CORRECT
9239 DØ 48              BNE ERR4        ;IF NOT, THEN QUIT
923B CE Ø4 Ø3           DEC KDOWN
923E DØ ED              BNE BLOCK1
9240 A2 Ø6              LDX #6
9242 DØ Ø2              BNE BLOCK3      ;BRANCH ALWAYS
                        ;
                        ;READ DATA BYTES
                        ;
9244 A2 ØB      BLOCK2  LDX #11
9246 2Ø DA 92   BLOCK3  JSR RDBYTE1     ;< NEXT DATA BYTE >
9249 A5 Ø6              LDA BYTE
924B 4D ØØ Ø3           EOR CHSUM       ;CHSUM =
924E 8D ØØ Ø3           STA CHSUM       ; EOR OF ALL DATA
9251 AØ ØØ              LDY #Ø
9253 A5 Ø6              LDA BYTE
9255 AE Ø3 Ø3           LDX SCAN        ;LOAD OR VERIFY
9258 FØ Ø6              BEQ BLOCK4      ;BRANCH IF LOADING
925A D1 Ø8              CMP (PTR),Y     ;VERIFY THIS CHAR
925C DØ 31              BNE ERR2
925E FØ Ø4              BEQ BLOCK5      ;BRANCH ALWAYS
9260 91 Ø8      BLOCK4  STA (PTR),Y     ;STORE THIS CHAR
9262 EA                 NOP             ;TIME DELAY
9263 EA                 NOP
9264 E6 Ø8      BLOCK5  INC PTR         ;INCREMENT
9266 DØ Ø2              BNE BLOCK6      ; BUFFER POINTER
9268 E6 Ø9              INC PTR+1
926A A5 Ø8      BLOCK6  LDA PTR         ;PTR < FIN
926C CD Ø7 Ø3           CMP FIN
926F A5 Ø9              LDA PTR+1
9271 ED Ø8 Ø3           SBC FIN+1       ;IF SO,
9274 9Ø CE              BCC BLOCK2      ; GET ANOTHER CHAR
                        ;
                        ;READ CHECKSUM BYTE
                        ;
9276 A2 ØB              LDX #11
9278 2Ø DA 92           JSR RDBYTE1
927B A5 Ø6              LDA BYTE
927D CD ØØ Ø3           CMP CHSUM       ;DOES IT CHECK
9280 DØ 19              BNE ERR3        ;IF NOT, THEN QUIT
9282 6Ø                 RTS
                        ;
                        ;ERROR TRAPS
                        ;
```

Listing 1 *(continued)*

```
9283 A9 C4      ERR4    LDA #MESG4
9285 85 ØA              STA ADR
9287 A9 92              LDA /MESG4
9289 85 ØB              STA ADR+1
928B 2Ø 62 93           JSR PRMESG
928E ØØ                 BRK
928F A9 A7      ERR2    LDA #MESG2
9291 85 ØA              STA ADR
9293 A9 92              LDA /MESG2
9295 85 ØB              STA ADR+1
9297 2Ø 62 93           JSR PRMESG
929A ØØ                 BRK
929B A9 B4      ERR3    LDA #MESG3
929D 85 ØA              STA ADR
929F A9 92              LDA /MESG3
92A1 85 ØB              STA ADR+1
92A3 2Ø 62 93           JSR PRMESG
92A6 ØØ                 BRK
92A7 D6 C5 D2   MESG2   ASC "VERIFY ERROR"
92B3 ØØ                 BYT Ø
92B4 C3 C8 C5   MESG3   ASC "CHECK-SUM ERROR"
92C3 ØØ                 BYT Ø
92C4 C3 CF D5   MESG4   ASC "COUNT-DOWN ERROR"
92D4 ØØ                 BYT Ø
92D5 CE Ø4 Ø3           DEC KDOWN
                ;
                ;-----------------------------
                ;READ A BYTE
                ;-----------------------------
                ;
                ;WAIT FOR SYNC BIT
                ;
92D8 A2 Ø2      RDBYTE  LDX #2
92DA 2Ø 55 93   RDBYTE1 JSR PULSE1
92DD EØ 43              CPX #$43        ;15ØØ HZ CYCLE
92DF 9Ø F7              BCC RDBYTE
92E1 EØ 56              CPX #$56
92E3 BØ F3              BCS RDBYTE
92E5 A2 Ø2              LDX #2          ;IF SO,
92E7 2Ø 55 93           JSR PULSE1      ; LOOK AT NEXT CYCLE
92EA EØ 3Ø              CPX #$3Ø        ;2ØØØ HZ CYCLE
92EC 9Ø EA              BCC RDBYTE
92EE EØ 43              CPX #$43
92FØ BØ E6              BCS RDBYTE
                ;
                ;DATA BITS
                ;
92F2 A9 ØØ              LDA #Ø
92F4 8D Ø1 Ø3           STA PAR         ;CLEAR PARITY COUNT
92F7 A9 Ø8              LDA #8          ;DO 8 BITS
92F9 8D Ø2 Ø3           STA KNT
92FC 2Ø 32 93   RDBYTE2 JSR GETBIT
92FF A5 Ø6              LDA BYTE
9301 6A                 ROR A           ;ROTATE BIT
9302 85 Ø6              STA BYTE        ; INTO BYTE
9304 4D Ø1 Ø3           EOR PAR         ;EOR THIS BIT WITH
9307 8D Ø1 Ø3           STA PAR         ;BIT 7 OF
930A CE Ø2 Ø3           DEC KNT         ; PARITY COUNT
930D DØ ED              BNE RDBYTE2
                ;
                ;CHECK PARITY
                ;
930F 2Ø 32 93           JSR GETBIT
9312 6A                 ROR A
9313 4D Ø1 Ø3           EOR PAR
9316 1Ø Ø1              BPL ERR1
9318 6Ø                 RTS
                ;
                ;PARITY ERROR
                ;
```

Listing 2

```
1Ø HOME :
   PRINT "TEXTLISTER"
2Ø PRINT :
   PRINT "BY ART MATHENY"
3Ø PRINT
4Ø PRINT TAB( 6);
   "THIS PROGRAM WILL LIST
   A"
5Ø PRINT TAB( 8);
   "SEQUENTIAL TEXT FILE."
6Ø PRINT
7Ø INPUT "GIVE THE FILE
   NAME: ";F$
8Ø PRINT
9Ø PRINT "WHAT SLOT IS THE
   PRINTER IN (Ø FOR TV)":
   INPUT SLOT
1ØØ IF SLOT >= Ø AND SLOT
   <= 7 THEN 11Ø
1Ø5 PRINT "ENTER A NUMBER
   BETWEEN Ø AND 7.":
   GOTO 9Ø
11Ø PRINT
12Ø D$ = CHR$ (4):
   REM <CTRL-D>
13Ø ONERR GOTO 33Ø
14Ø PRINT D$;"PR #";SLOT
15Ø PRINT : PRINT : PRINT :
   PRINT
16Ø PRINT "LISTING OF FILE:
   ";F$
17Ø PRINT : PRINT
18Ø PRINT D$;"OPEN ";F$
19Ø PRINT D$;"READ ";F$
2ØØ :
21Ø REM
   ------------------------
22Ø REM GET ONE CHARACTER
   AT A TIME
23Ø REM
   ------------------------
24Ø :
25Ø GET A$:A = ASC (A$)
255 IF A > 31 THEN PRINT "
   "; CHR$ (128 + A);:
   GOTO 25Ø
26Ø IF A = 13 THEN PRINT "
   ": GOTO 25Ø
27Ø PRINT " @";: GOTO 25Ø:
   REM UNPRINTABLE CHAR
28Ø :
29Ø REM
   ------------------------
3ØØ REM ERROR HANDLING
   ROUTINE
31Ø REM
   ------------------------
32Ø :
33Ø PRINT : PRINT : PRINT :
   PRINT
34Ø PRINT D$;"CLOSE ";F$
35Ø PRINT D$;"PR #Ø"
36Ø END
```

Listing 3

```
10 PRINT"{CLR}
   SAVE A RANGE OF MEMORY"
20 PRINT"WHAT IS THE":
   INPUT"STARTING ADDRESS";
   K1
30 PRINT"WHAT IS THE":
   INPUT"ENDING ADDRESS";
   K2
40 PRINT"WHAT IS THE":
   INPUT"FILENAME";F$
50 OPEN 1,1,2,F$
60 PRINT#1,K1;CHR$(13)
70 PRINT#1,K2;CHR$(13)
80 FOR K=K1 TO K2
90 PRINT#1,PEEK(K);
   CHR$(13)
100 NEXT
110 CLOSE 1
120 END
```

Listing 4

```
10 TEXT : HOME
20 PRINT "LOADING NUMERIC
   DATA FROM A TEXT FILE"
30 PRINT "INTO A RANGE OF
   MEMORY."
40 PRINT
50 INPUT "WHAT IS THE
   FILENAME ";F$
60 PRINT "WHAT IS THE
   STARTING ADDRESS (ENTER
   0"
70 PRINT "TO PUT IT AT
   THE ORIGINAL ADDRESS)"
80 INPUT A1
90 PRINT  CHR$ (4);
   "OPEN ";F$
100 PRINT  CHR$ (4);
   "READ ";F$
110 INPUT K1: INPUT K2
120 IF A1 = 0 THEN A1 = K1
130 L = K2 - K1 + 1:
   A2 = A1 + L - 1
140 PRINT
150 PRINT "STARTING
   ADDRESS = ";A1
160 PRINT "ENDING ADDRESS
   = ";A2
170 PRINT "LENGTH = ";L
180 PRINT
190 FOR K = A1 TO A2
200 INPUT X: POKE K,X
210 NEXT K
220 PRINT  CHR$ (4);
   "CLOSE ";F$
230 END
```

MICRO

Listing 1 *(continued)*

```
9319 A9 25      ERR1    LDA #MESG1
931B 85 0A              STA ADR
931D A9 93              LDA /MESG1
931F 85 0B              STA ADR+1
9321 20 62 93           JSR PRMESG
9324 00                 BRK
9325 D0 C1 D2   MESG1   ASC "PARITY ERROR"
9331 00                 BYT 0
                ;
                ;-------------------------------
                ;READ A BIT
                ;-------------------------------
                ;
                ;SUBROUTINE RETURNS:
                ; X=DURATION OF 1ST PULSE
                ; Y=DURATION OF 2ND PULSE
                ; CARRY SET IFF X> Y
                ;
9332 A2 05      GETBIT  LDX #5
9334 E8         GETBIT1 INX
9335 AD 60 C0           LDA TAPEIN
9338 30 FA              BMI GETBIT1
933A E8         GETBIT2 INX
933B AD 60 C0           LDA TAPEIN
933E 10 FA              BPL GETBIT2
9340 A0 00              LDY #0
9342 C8         GETBIT3 INY
9343 AD 60 C0           LDA TAPEIN
9346 30 FA              BMI GETBIT3
9348 C8         GETBIT4 INY
9349 AD 60 C0           LDA TAPEIN
934C 10 FA              BPL GETBIT4
934E 84 07              STY TEMP
9350 E4 07              CPX TEMP
9352 60         ;       RTS
                ;-------------------------------
                ;READ A SINGLE PULSE
                ;-------------------------------
                ;
9353 A2 00      PULSE   LDX #0
9355 E8         PULSE1  INX
9356 AD 60 C0           LDA TAPEIN
9359 30 FA              BMI PULSE1
935B E8         PULSE2  INX
935C AD 60 C0           LDA TAPEIN
935F 10 FA              BPL PULSE2
9361 60                 RTS
                ;
                ;-------------------------------
                ;PRINT MESSAGES
                ;-------------------------------
                ;
9362 A0 00      PRMESG  LDY #0
9364 B1 0A      PRMESG1 LDA (ADR),Y
9366 F0 08              BEQ PRMESG2   ;BRANCH IF ZERO
9368 09 80              ORA #$80      ;SET BIT 7
936A 20 F0 FD           JSR COUT1
936D C8                 INY
936E D0 F4              BNE PRMESG1
9370 A9 8D      PRMESG2 LDA #$8D      ;RETURN CHAR
9372 20 F0 FD           JSR COUT1
9375 60                 RTS
                ;
                ;-------------------------------
                ;FILE MANAGER BUFFERS
                ;-------------------------------
                ;
9376            WORKAREA DFS 1
93A3            SECTOR  EQU WORKAREA+45
94A3            BUFFER  EQU SECTOR+256
9377                    END
```

Subscribe to MICRO...

Save 20% and we'll send you a BONUS GIFT

with your subscription!

Receive a coupon good for one MicroDisk of your choice. A $15.00 Value — FREE!

Each Disk contains a variety of programs from Micro, all entered and ready to run on your machine. Saves time, avoids errors.

This offer expires October 31, 1984

Fill out the attached card and mail today!

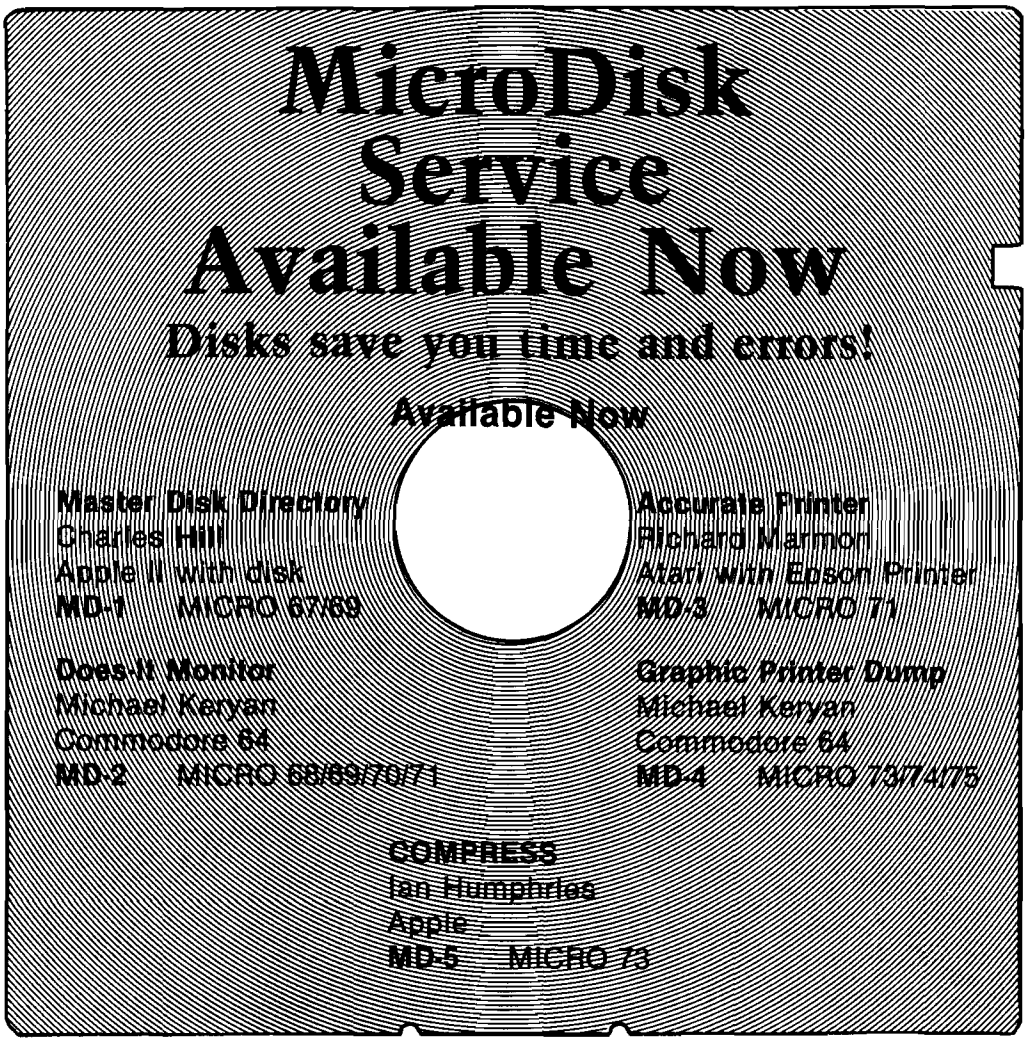

Each diskette includes all of the programs in BASIC and/or Assembly Source, plus binary 'load-and-go' files. The price of only $15.00 includes shipping and handling.

SAVE 20%!

Use This Postage-Paid Card To Subscribe... Or Call Toll-Free 1-800-345-8112

(In PA 1-800-662-2444)

(MasterCard and VISA Accepted)

MICRO™

SAVE 20%

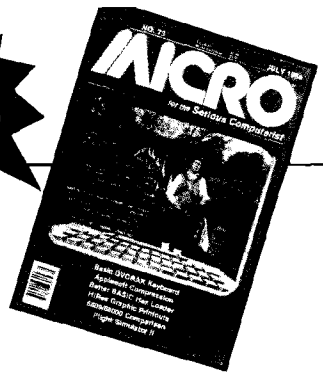

☐YES! Enter my subscription to MICRO for just $24.00 per year and send me a BONUS GIFT COUPON for one free MicroDisk.

☐ Renew my subscription to MICRO for just $24.00 and send me a BONUS GIFT COUPON for one free MicroDisk.

My mailing label number is MC_ _ _ _ _ _ _ _ _ _ _ _ _.

Please rush my subscription and the BONUS GIFT I've checked to:

Name _____

Address _____

City _____ State _____ Zip _____

(Allow 6-8 weeks for delivery) Bonus Coupon offer expires Oct. 31, 1984

I'm paying by: ☐Check ☐MO ☐VISA ☐MC

Total Enclosed:$_____

Visa/MC #_____

Exp. Date:_____

MICRO™'s Newest Software

MicroDisks

Send me the following MicroDisks at $15.00 each prepaid

- ☐MD-1 Master Disk Directory
- ☐MD-2 Does'It Monitor
- ☐MD-3 Accurate Printer
- ☐MD-4 Graphic Printer Dump
- ☐MD-5 COMPRESS

MicroCalc

The Full Screen Calculator

Easier than spreadsheet programs, does calculations of unlimited length and complexity on screen, links screens, saves on disk or tape, provides formatted printer output. Contains a 48'page manual and diskette.

- ☐ MicroCalc for Commodore 64.....$29.95
- ☐ MicroCalc for Apple II/IIe/IIc.....$29.95
- ☐ MicroCalc for Atari.....$29.95

Please rush the Micro Software checked above to:

Name _____

Address _____

City _____ State _____ Zip _____

MA residents add 5% sales tax.

I'm paying by: ☐ Check ☐ MO ☐ VISA ☐ MC

Total Enclosed: $ _____

Visa/MC # _____

Exp. Date: _____

MICRO™'s Best Sellers

Mastering Your VIC-20

Contains 8 projects and programs.....Utilities, games — even a version of "VisiCalc." All 8 programs on cassette to help you learn faster. Makes learning to program you VIC 20 fun.

☐ Mastering Your VIC 20...$19.95

What's Where in the Apple

Revised new edition with Apple IIe information added to original atlas and gazetter. All Apple users will find this book helpful in understanding their machine and essential for mastering it.

☐ What's Where in the Apple **@ $19.95**

Best Sellers for APPLE Users!

MICRO on the APPLE

Programming aids, utilities, games, enhancements. Together Volumes 1, 2, and 3 contain over 100 programs on diskette. Fully documented and explained.

☐ 3-Volume Gift-Boxed @ $59.95

☐ Vol.2☐ Vol.3 $24.95 ea.

Please rush the MICRO Books I've checked above to:

Name _____

Address _____

City _____ State _____ Zip _____

MA residents add 5% sales tax.

I'm paying by: ☐ Check ☐ MO ☐ VISA ☐ MC

Total Enclosed: $ _____

Visa/MC # _____

Exp. Date: _____

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 60, CHELMSFORD, MA

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™
P.O. Box 6502
Chelmsford, MA 01824

SAVE 20%!!!!

Subscribe to MICRO

Use This Postage Paid Card to Orde the Next 12 Issues of MICRO and SAV
$6.00 Off Newsstand Price!

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 60, CHELMSFORD, MA

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™
P.O. Box 6502
Chelmsford, MA 01824

A Feast O Computin Ideas...

New Book From MICRO

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 60, CHELMSFORD, MA

POSTAGE WILL BE PAID BY ADDRESSEE

MICRO™
P.O. Box 6502
Chelmsford, MA 01824

Order Thes

Best Sellers From MICRO

feature

BASIC Hex Loader

by Robert M. Tripp

A short BASIC utility that loads DATA written in Hexidecimal notation. A special version for the C-64 generates the DATA statements.

Requirements: Any BASIC

If you have an assembly listing or the hex dump of a machine language program, getting it to load with BASIC can be a real problem. BASIC likes to work only in decimal, so you must make the conversion from hex to decimal and then type in the DATA statements. For years, MICRO has had to 'waste space' providing both the 'useful' assembly listing and the 'necessary' decimal DATA statement form of the same information. If there was a simple way to input the natural hex information, then this additional dump would not be required.

One solution is presented here in Listing 1. It is a simple, short BASIC program that will load hexidecimal information. It is best understood through a brief example. Suppose that you have an assembly program that starts as follows:

```
Ø33C  A5  7A      ENTER   LDA   TXTPTR
Ø33E  8D  7Ø  Ø3            STA   TEMPLO
Ø341  A5  7B                LDA   TSTPTR1
```

and so forth. Normally you would have to convert the hex information: A5 7A 8D 70 03 A5 7B etc. into the decimal equivalents to generate the following DATA statement:

```
DATA 165,122,141,112,3,165,123
```

The HEX Loader lets you use a DATA statement of the form:

```
DATA "A57A8D7ØØ3A57B"
```

Listing 1

```
1Ø REM HEX LOADER  R.M.TRIPP
11 READ X$:Z=LEN(X$):GOSUB 17:
   MS=X:Z=2
12 READ HX$:J=1
13 X$=MID$(HX$,J,2)
14 IF X$="XX" THEN END
15 IF X$="YY" THEN GOTO 12
16 GOSUB 17:POKE MS,X:MS=MS+1:
   J=J+2:GOTO 13
17 X=Ø:FOR I=1 TO Z:
   Y=ASC(MID$(X$,I,1)):
   IF Y> 57 THEN Y=Y-7
18 Y=Y-48:X=X*16+Y:NEXT:RETURN
```

which is obviously much easier to generate.

Using Hex Loader

The first DATA statement must be the hex address at which the hex information is to start loading. The remaining DATA statements each consist of an ASCII string that contains the hex data, terminated by the non-hex ASCII pair "YY". The end of hex information is indicated by the non-hex ASCII pair "XX". For example:

```
1ØØØØ DATA "Ø33C"
1ØØ1Ø DATA "A57A8D7ØØ3A57BYY"
1ØØ2Ø DATA "8D71Ø3A9ØØ857AA9Ø2XX"
```

The program was written to fit neatly between lines 10 and 20 of your typical BASIC program. You may want to change line 14 so that it performs a **GOTO** when done loading instead of the current **END**. That is the only change that should be required to add this utility to your programs.

Hex DATA Generator

The second listing is a special program for the Commodore 64 that generates the BASIC DATA statements from information already existing in memory. You may already have the information in memory from an assembly, from entering it through a monitor, or as the result of running a program. You specify the BASIC line number to start using for the DATA statements and the memory start and ending addresses. The program automatically generates all of the DATA statements required by the Hex Loader and then automatically deletes itself, leaving just the Hex Loader and the DATA statements. It is really pretty neat — and fun to watch in operation, since most of the action is on the screen. And, it can save you a lot of time.

Listing 2

```
 1 REM HEX MAKER  R.M. TRIPP
 2 Z=4:INPUT "{CLEAR}BASIC LINE
   NUMBER: ";LN
 3 INPUT "HEX START ADDR: ";X$:
   MS$=X$:GOSUB 3Ø:MS=X
 4 INPUT "HEX LAST ADDR: ";X$:
   GOSUB 3Ø:ME=X
 5 PRINT "{CLEAR}";
   MID$(STR$(LN),2);" DATA ";
   CHR$(34);MS$;CHR$(34):
   LN=LN+1Ø:K=1:GOTO 7
 6 PRINT "{CLEAR}";:K=Ø
 7 FOR I=K TO 6:
   PRINT MID$(STR$(LN),2);
   " DATA ";CHR$(34);
 8 FOR J=ØTO1Ø:X=PEEK(MS):
   GOSUB 5Ø:PRINT HL$;:MS=MS+1
 9 IF MS> ME THEN PRINT "XX";-
   :I=6:
   J=11
1Ø NEXT J:PRINT "YY";CHR$(34):
   LN=LN+1Ø
11 NEXT I:PRINT"LN=";LN;":
   MS=";MS;":ME=";ME
12 IF MS> ME THEN PRINT"{DOWN2}
   GOTO 14":GOTO 16
13 PRINT "{DOWN2}GOTO 6":GOTO 16
14 PRINT "{CLEAR}";:FORI=1TO8:
   PRINT I:NEXT:PRINT "GOTO 15":
   GOTO 16
15 PRINT "{CLEAR}";:FORI=9TO16:
   PRINT I:NEXT
16 POKE 631,19:FOR I=1 TO 9:
   POKE 631+I,13:NEXT:
   POKE 198,1Ø:END
2Ø REM HEX LOADER  R.M.TRIPP
21 READ X$:Z=LEN(X$):GOSUB 3Ø:
   MS=X:PRINT "{CLEAR}LOADING
   FROM ";X$;" TO ";:Z=2
22 READ HX$
23 FOR J=1 TO 99 STEP 2:
   X$=MID$(HX$,J,2)
24 IF X$="XX" THEN MS=MS-1:
   GOSUB 4Ø:PRINT MS$:END
25 IF X$="YY" THEN J=99:GOTO 27
26 GOSUB 3Ø:POKE MS,X:MS=MS+1
27 NEXT:GOTO 22
3Ø X=Ø:FOR I=1 TO Z:
   Y=ASC(MID$(X$,I,1)):
   IF Y> 57 THEN Y=Y-7
31 Y=Y-48:X=X*16+Y:NEXT:RETURN
4Ø X=INT(MS/256):GOSUB 5Ø:
   MS$=HL$:X=INT(MS-X*256):
   GOSUB 5Ø:MS$=MS$+HL$:RETURN
5Ø H=INT(X/16):L=INT(X-H*16):
   IF H> 9 THEN H=H+7
51 IF L> 9 THEN L=L+7
52 HL$=CHR$(H+48)+CHR$(L+48):
   RETURN
```

Circles for the Commodore 64

by Lester Cain

An interesting mathematical way to plot circles on the C-64

Editor's Note: For easy method of entering hex object into a BASIC program, see Hex Loader, by R. Tripp, page 65.

The programs contained in this article will give a theory behind creating circles on a Commadore 64 specifically, but generally on any 6502 computer with HiRes capabilities. Also, it gives necessary code to implement circles in a game or business type analysis.

Let us first discuss the problems associated with creating a circle in a HiRes environment. In an 8 bit screen memory each memory address is made up of bytes containing 8 bits in some kind of sequential fashion. Unfortunately, most of the more popular computers do not do this in the same way. Therefore, a universal method has been developed to visualize this screen memory in a way common to all configurations. This universal way of looking at a graphics screen is referred to as World Coordinates X and Y, taken from common graphing methods, where X is the horizontal axis and Y is the vertical axis. The problem then is to draw a circle in this X and Y environment. Using the X and Y outlook, the only time the actual screen layout comes into effect is when actually setting the computed bit at its computed spot in the maze.

```
                ; CIRCLE DRAWING ROUTINES
                ; PLOTS HIRES CIRCLE ON THE
                ; COMMODORE 64.
                ;
                ; CODE BY: LESTER CAIN
                ;
                ; EXTERNAL GLOBL VARIABLES
                ;
033C             ST       EQU $33C
033C             X1LO     EQU ST
033D             X1HI     EQU ST+1
033E             Y1LO     EQU ST+2
0344             CXLO     EQU ST+8
0345             CXHI     EQU ST+9
0346             CY       EQU ST+10
0347             RAD      EQU ST+11
0348             MODE     EQU ST+12
00B0             SPLO     EQU $B0
00B1             SPHI     EQU SPLO+1
                ;
C000                      ORG $C000
                ;
                ; CIRCLE: PLOT A CIRCLE IN HIRES
                ;   ENTRY CONDITIONS:
                ;     CX AND CY SET BY CALLING
                ;     RADIUS SET IN GLOBL RAD
                ;   EXIT CONDITIONS:
                ;     CIRCLE IS DRAWN IN HIRES
                ;
C000 AD 47 03   CIRCLE   LDA RAD       ;FETCH RADIUS
C003 8D 79 C0            STA DX        ;SAVE AS FIRST DX
C006 A8                  TAY           ;COPY RAD TO Y
C007 20 2C C1            JSR MULT8     ;AND SQUARE IT
C00A 8D 77 C0            STA RSQLO     ;SAVE FOR COMP.
C00D 8C 78 C0            STY RSQHI     ;AND THE HI BYTE
C010 A9 00               LDA #$0       ;ZERO DY
C012 8D 7A C0            STA DY
C015 20 7B C0            JSR COMPXY    ;PLOT 1ST 4 DOTS
C018 EE 7A C0   LOOP     INC DY        ;LEG +1
C01B AD 79 C0            LDA DX
C01E CD 7A C0            CMP DY        ;45 DEGREES YET
C021 30 0C               BMI LOOP1     ;PLOT OTHER HALF
C023 AC 7A C0            LDY DY        ;COMP OTHER LEG
C026 20 FE C0            JSR COMLEG    ;PLOT ANOTHER 1
C029 20 7B C0            JSR COMPXY
C02C 18                  CLC           ;FORCED JUMP
C02D 90 E9               BCC LOOP
                ;
C02F AD 47 03   LOOP1    LDA RAD       ;GET THE RADIUS
C032 8D 7A C0            STA DY
C035 A9 00               LDA #$00      ;ZERO DX
C037 8D 79 C0            STA DX
C03A 20 7B C0            JSR COMPXY    ;COMPUTE THIS BAT.
C03D EE 79 C0   LOOP2    INC DX        ;INC Y
C040 AD 7A C0            LDA DY        ;CHECK FOR = WILL
C043 CD 79 C0            CMP DX        ;MEAN CIRCLE COMP
C046 30 2D               BMI DONE      ;CIRCLE DON
C048 AD 79 C0            LDA DX        ;SWAP FUNCTIONS
C04B 8D 76 C0            STA TEMP
C04E AD 7A C0            LDA DY
C051 8D 79 C0            STA DX
C054 AD 76 C0            LDA TEMP
C057 8D 7A C0            STA DY        ;SWAP DONE
C05A AC 7A C0            LDY DY        ;COMP. OTHER LEG
C05D 20 FE C0            JSR COMLEG    ;COMPUTE NEW LENG
C060 8D 76 C0            STA TEMP
```

Announcing New Software From MICRO

★ **Mastering Your Vic-20(Cassette)**

★ **Mastering Your Atari(Diskette)**

★ **Mastering Your Commodore 64(Diskette)**

Eight entertaining major projects on cassette or diskette, plus a 160-190 page book, teach you BASIC programming the easy way. Run the programs, see what they do, how they are constructed and how they work.

Projects include Microcalc (display calculation program for complex math), Player (compose and edit songs on your keyboard), Master (guessing game for 1-2 players), Clock (character graphics), and four more.

Each package only **$19.95**
(C-64 available in Sept.)

MicroCalc

Faster and easier to use than spreadsheet programs, this full screen calculator is useful in business, home and school. A speedy way to learn BASIC expressions if you don't already know them.

There is no limit to the length or complexity of calculations and screens can be automatically linked, saved on disk or cassette, and customized.

Only $29.95.
Available for C-64
Apple II/IIe, Atari

Micro, P.O. Box 6502
Chelmsford MA 01824
617/256-3649
Visa and Mastercard Accepted


```
C063 AD 7A C0           LDA DY
C066 8D 79 C0           STA DX
C069 AD 76 C0           LDA TEMP
C06C 8D 7A C0           STA DY
C06F 20 7B C0           JSR COMPXY      ;COMPUTE NEW SET
C072 18                 CLC
C073 90 C8              BCC LOOP2
C075 60         DONE    RTS             ;RETURN TO CALL
C076 00         TEMP    BYT 0           ;TEMP STORAGE
C077 00         RSQLO   BYT 0
C078 00         RSQHI   BYT 0
C079 00         DX      BYT 0
C07A 00         DY      BYT 0
                ;
                ; COMPXY: COMPUTES X,Y COORDINATES
                ;   IN EACH QUADRANT FROM DX,DY
                ; ENTRY CONDITIONS:
                ;   DX, DY COMPUTED BY CALLING PROGRAM
                ; EXIT CONDITIONS:
                ;   A DOT IS PLOTTED IN EACH
                ;   OF THE FOUR QUADRANTS
                ;   X1L AND Y1L ARE THE OFFSET IN 1
                ;   X2L AND Y1L ARE THE OFFSET IN 2
                ;   X2L AND Y2L ARE THE OFFSET IN 3
                ;   X1L AND Y2L ARE THE OFFSET IN 4
                ;
C07B AD 45 03   COMPXY  LDA CXHI        ;HI CENTER
C07E 8D F9 C0           STA X1H         ;RT QUADS.
C081 8D FB C0           STA X2H         ;LT QUADS.
C084 AD 44 03           LDA CXLO        ;CENTER LO
C087 18                 CLC
C088 6D 79 C0           ADC DX
C08B 8D F8 C0           STA X1L
C08E 90 08              BCC CIP1        ;NO OVERFLOW
C090 AD 45 03           LDA CXHI        ;IS HI ON
C093 D0 03              BNE CIP1        ;SKIP INCREM.
C095 EE F9 C0           INC X1H         ;UP RT HI+1
                ;
C098 AD 44 03   CIP1    LDA CXLO        ;CENTER X
C09B 38                 SEC             ;-DX
C09C ED 79 C0           SBC DX
C09F 8D FA C0           STA X2L         ;NEW PLOT X LO
C0A2 B0 03              BCS CIP2        ;NO BORROW
C0A4 CE FB C0           DEC X2H         ;HIBYTE OF X-1
                ;
C0A7 AD 46 03   CIP2    LDA CY          ;CENTER Y
C0AA 18                 CLC             ;+ DY
C0AB 6D 7A C0           ADC DY
C0AE 8D FC C0           STA Y1L         ;NEW PLOT Y LO
                ;
C0B1 AD 46 03           LDA CY          ;CENTER Y AG.
C0B4 38                 SEC             ;-DY
C0B5 ED 7A C0           SBC DY
C0B8 8D FD C0           STA Y2L         ;LO VALUE NEW Y
                ;
                ; TRANSFER NEW VALUES TO X AND Y COORDINATES
                ; AND PLOT THE FOUR NEW POINTS.
                ;
C0BB AD F8 C0           LDA X1L         ;UPPER RT. QD.
C0BE 8D 3C 03           STA X1LO        ;NEW X LO
C0C1 AD F9 C0           LDA X1H         ;NOW HI VAL.
C0C4 8D 3D 03           STA X1HI
C0C7 AD FC C0           LDA Y1L         ;NOW DO Y
C0CA 8D 3E 03           STA Y1LO        ;ONLY LO VAL.
C0CD 20 78 C1           JSR PLOTXY      ;PLOT UP RT.
                ;
C0D0 AD FA C0           LDA X2L         ;GET NEW X
C0D3 8D 3C 03           STA X1LO        ;Y DOES NOT
C0D6 AD FB C0           LDA X2H         ;CHANGE
```

```
C0D9 8D 3D 03           STA X1HI        ;THIS TIME
C0DC 20 78 C1           JSR PLOTXY      ;PLOT UP LT
                ;
C0DF AD FD C0           LDA Y2L         ;CHANGE Y THIS
C0E2 8D 3E 03           STA Y1LO        ;TIME
C0E5 20 78 C1           JSR PLOTXY      ;PLOT LWR LT.
                ;
C0E8 AD F8 C0           LDA X1L         ;CHANGE X THIS
C0EB 8D 3C 03           STA X1LO        ;TIME
C0EE AD F9 C0           LDA X1H         ;SO WE CAN
C0F1 8D 3D 03           STA X1HI
C0F4 20 78 C1           JSR PLOTXY      ;PLOT LWR RT.
C0F7 60                 RTS             ;RETURN
C0F8 00         X1L     BYT 0
C0F9 00         X1H     BYT 0
C0FA 00         X2L     BYT 0
C0FB 00         X2H     BYT 0
C0FC 00         Y1L     BYT 0
C0FD 00         Y2L     BYT 0

                ;COMLEG: COMPUTES UNKNOWN LEG OF TRIANGLE.
                ;ENTRY CONDITIONS:
                ; RADIUS (HYPOTENUSE) IN ACC., DY IN Y.
                ;EXIT CONDITIONS:
                ; DX CONTAINS THE OTHER LEG.
                ;
C0FE 98         COMLEG  TYA             ;GET DY
C0FF 20 2C C1           JSR MULT8       ;DY*DY
C102 8D 2A C1           STA TEDYL       ;RETURN LO BYTE
C105 8C 2B C1           STY TEDYH       ;Y HAS HI BYTE
C108 AD 77 C0           LDA RSQLO       ;R LO
C10B 38                 SEC
C10C ED 2A C1           SBC TEDYL       ;R LO -DY LO
C10F 8D 2A C1           STA TEDYL
C112 AD 78 C0           LDA RSQHI       ;R HI
C115 F0 06              BEQ XY1         ;NO HI BYTE
C117 ED 2B C1           SBC TEDYH       ;R HI -DY LO
C11A 8D 2B C1           STA TEDYH
C11D AD 2A C1   XY1     LDA TEDYL       ;(R)-(DY)LO
C120 AC 2B C1           LDY TEDYH       ;HI BYTE
C123 20 45 C1           JSR SQRT        ;SQRT OF
C126 8D 79 C0           STA DX          ;SAVE FOR DX
C129 60                 RTS             ;(R)-(DY)
C12A 00         TEDYL   BYT 0
C12B 00         TEDYH   BYT 0
                ;
                ; MULT8: 8 BITS BY 8 BITS
                ; ENTRY CONDITIONS:
                ; MULTIPLICAND IN Y, MULTIPLIER IN ACC.
                ; EXIT CONDITIONS:
                ; LO BYTE IN ACC. HI BYTE IN Y
                ;
00AC            ANSLO   EQU $AC
00AD            PLIER   EQU ANSLO+1
00AE            CAND    EQU ANSLO+2
                ;
C12C 85 AD      MULT8   STA PLIER       ;SAVE MULTIPIER
C12E 84 AE              STY CAND        ;SAVE MULTICAND
C130 A9 00              LDA #$00        ;INIT FIRST VALUE
C132 A0 08              LDY #$08        ;COUNTER 8 BITS
C134 46 AD      MUL1    LSR ALIER       ;TST NEXT BIT
C136 90 03              BCC MUL2        ;IF OFF ROUND
C138 18                 CLC
C139 65 AE              ADC CAND        ;IF ON, ADD
C13B 6A         MUL2    ROR A           ;SHIFT ANSWER 1
C13C 66 AC              ROR ANSLO
C13E 88                 DEY             ;DEC POS. COUNTER
C13F D0 F3              BNE MUL1        ;LOOP 8 TIMES
```

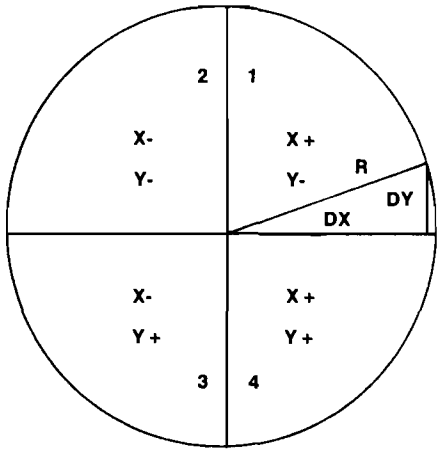

Figure 1

Refer to Figure 1 as this discussion proceeds. The first step will be to define the center of the circle, referred to as CX and CY. Any value will do for a starter, of course assuming it will fit into the screen limitations. Let it be CX = 100 and CY = 100 for an even set of figures to add to and subtract from. Pick out a nice radius for the circle, say R = 50. Divide the circle into 4 quadrants and picture inside each quadrant a right triangle. One side will be DX, the other side DY and the hypotenuse is the Radius. The first point(s) to plot will be on the Radius. No problem so far; the first four points are just + or - from the center of the circle. But this is the end of the easy part. To compute the next point, add one to the value DY and using the pythagorean theorem, compute DX. This formula says the unknown leg is equal to the square root of the (hypotenuse sq. - the known leg sq.). Since this value is the same in all of the 4 quadrants, only one computation is needed. Depending on which quadrant the point is in will determine whether the values DX and DY are added to or subtracted from the center CX,CY values. In quadrant 1, DX is positive and DY is negative. Figure 1 gives each quadrant DX and DY values. To get the circumference point in terms of X and Y, the DY and DX values will be

algebraically added to the CX and CX center for each point on the circle. Now, it is time to call the plotting routine 4 times, once for each quadrant. Also this is where the plotting routine is more or less machine dependent.

Continue incrementing DY until it is > = DX. This will plot half of the circle from the horizontal axis right and left. When this point is reached, to make the circle come together in a neat fashion, it is necessary to swap DX and DY and plot from the top and bottom towards the already plotted portion of the circle. Continuing the plot without the swap will leave gaps at the vertical axis, because DY has become larger than DX, stretching integer arithmetic beyond its limits of accuracy.

Listing 1 is the Basic loader to load the machine code into memory. Type it in carefully and save often, especially before trying to run it. The last 39 bytes is a screen clear routine. Listing 2 is a short demo to exercise the code. Type it and save it also. Run the loader first, then the demo routine. If all the data statements were correct, the demo will draw four sets of circles converging at a peak in the center of the screen. These two routines are limited to the Commodore 64 HiRes screen.

Some explanation of the Demo is in order to explain how to use the Circle function.

Line 130 — Sets up the storage in the cassette buffer and equates the variables of the circle parameters. CL is the center, X value lo, Ch X value hi.

Line 140 — Video chip address, CY is storage for center of the circle.

Line 150 — Turns on the HiRes 0 $2000 and clears it.

Line 160 — Sets the mode bit to draw.

```
C141 A8                 TAY             ;Y=HI BYTE
C142 A5 AC              LDA ANSLO       ;A=LO BYTE
C144 60                 RTS
                ;
                ; SQRT: 16 BIT SQUARE ROOT
                ; ENTRY CONDITIONS:
                ; LO BYTE IN ACC., HI BYTE IN Y
                ;
                ; EXIT CONDITIONS:
                ; SQRT OF NO. IN ACC.
                ;
00AC             LO       EQU $AC
00AD             HI       EQU LO+1
00AE             LO1      EQU LO+2
00AF             HI1      EQU LO+3
                ;
C145 85 AC       SQRT     STA LO          ;SAVE LO BYTE
C147 84 AD               STY HI          ;SAVE HI BYTE
C149 A2 01               LDX #$01        ;START WITH FIRST 1
C14B 86 AE               STX LO1
C14D CA                  DEX             ;SUBTRACTION REG
C14E 86 AF               STX HI1         ;SQRT =0
C150 38          LOP     SEC
C151 A5 AC               LDA LO          ;SAVE REM IN Y
C153 A8                  TAY
C154 E5 AE               SBC LO1         ;SUB ODD FROM LO
C156 85 AC               STA LO          ;ONE REM
C158 A5 AD               LDA HI          ;SUB 1 FROM HI
C15A E5 AF               SBC HI1
C15C 85 AD               STA HI          ;HI REMAINDER
C15E 90 0D               BCC DNE         ;- RESULT
C160 E8                  INX
C161 A5 AE               LDA LO1         ;ADD 1 + CARRY
C163 69 01               ADC #1
C165 85 AE               STA LO1
C167 90 E7               BCC LOP         ;NO NEED TO UP HI
C169 E6 AF               INC HI1         ;HI SUB +1
C16B D0 E3               BNE LOP
C16D 86 AC       DNE     STX LO          ;CHECK FOR ROUND
C16F C4 AC               CPY LO          ;REM< N
C171 90 02               BCC RETS
C173 E6 AC               INC LO          ;ROUND UP
C175 A5 AC       RETS    LDA LO          ;PUT SQRT IN ACC.
C177 60                  RTS
                ;
                ;PLOTXY: PLOTTING ROUTINE
                ;USED IN GRAPHICS HIRES MODE
                ;ENTRY CONDITIONS:
                ; MODE IS SET TO 0,1,2
                ; X IS IN X1LO AND X1HI
                ; Y IS IN Y1LO AND Y2HI
                ;EXIT CONDITIONS:
                ; 1 BIT IS SET FOR X,Y IN HIRES SCREEN
                ;
C178 AD 3C 03    PLOTXY  LDA X1LO        ;LINE=XAND7
C17B 48                  PHA
C17C 29 07               AND #$07
C17E 8D 32 C2            STA LINE
C181 68                  PLA
C182 29 F8               AND #$F8        ;STRIP X OF LO 3 BITS
C184 85 B0               STA SPLO        ;INITIAL POINT
C186 AD 3D 03            LDA X1HI
C189 85 B1               STA SPHI        ;HI BYTE
C18B AD 3E 03            LDA Y1LO
C18E 29 07               AND #$07        ;STRIP Y OF HI 5 BITS
C190 18                  CLC
C191 65 B0               ADC SPLO        ;AND ADD TO INIT.
C193 85 B0               STA SPLO
```

```
C195 A9 ØØ              LDA #$ØØ       ;ADD IN ANY CARRY
C197 65 B1              ADC SPHI
C199 85 B1              STA SPHI
C19B AD 3E Ø3           LDA Y1LO       ;ROW=INT(Y/8)
C19E 4A                 LSR A
C19F 4A                 LSR A
C1AØ 4A                 LSR A
C1A1 A8                 TAY            ;GIVES INDEX
C1A2 CØ 19              CPY #25        ;DISALLOW OUTSIDE
C1A4 1Ø 2C              BPL RETP       ;GRAPHICS RANGE
C1A6 B9 ØØ C2           LDA COLTAB,Y   ;GET LO OFFSET
C1A9 18                 CLC
C1AA 65 BØ              ADC SPLO       ;ADD TO LO 3 OF Y
C1AC 85 BØ              STA SPLO       ;AND INITIAL POINT
C1AE B9 19 C2           LDA ROWTAB,Y   ;GET HI OFFSET
C1B1 65 B1              ADC SPHI
C1B3 85 B1              STA SPHI
                ;
C1B5 AD 48 Ø3  DETMOD   LDA MODE       ;MODE Ø,1,2
C1B8 FØ 19              BEQ ANDBIT     ;CLEAR WITH AND
C1BA C9 Ø2              CMP #2
C1BC FØ 29              BEQ XORBIT     ;CLR OR SET?
C1BE C9 Ø1              CMP #1
C1CØ DØ 1Ø              BNE RETP       ;BAD VALUE
                ;
C1C2 98        SETBIT   TYA            ;SAVE Y
C1C3 48                 PHA
C1C4 AC 32 C2           LDY LINE       ;INDEX
C1C7 B9 F8 C1           LDA BITTAB,Y   ;BIT VALUES
C1CA AØ ØØ              LDY #$ØØ
C1CC 11 BØ              ORA (SPLO),Y   ;SET SPEC. BIT
C1CE 91 BØ              STA (SPLO),Y
C1DØ 68                 PLA            ;RESTORE Y
C1D1 A8                 TAY
C1D2 6Ø        RETP     RTS
                ;
C1D3 98        ANDBIT   TYA
C1D4 48                 PHA
C1D5 AC 32 C2           LDY LINE
C1D8 A9 FF              LDA #$FF       ;USE RECIPROCAL
C1DA 38                 SEC
C1DB F9 F8 C1           SBC BITTAB,Y   ;OF SET FUNCTIONS
C1DE AØ ØØ              LDY #Ø
C1EØ 31 BØ              AND (SPLO),Y
C1E2 91 BØ              STA (SPLO),Y
C1E4 68                 PLA
C1E5 A8                 TAY
C1E6 6Ø                 RTS
                ;
C1E7 98        XORBIT   TYA            ;XOR WILL ALLOW
C1E8 48                 PHA            ;WRITING AND
C1E9 AC 32 C2           LDY LINE       ;ERASING OVER
C1EC B9 F8 C1           LDA BITTAB,Y   ;OTHER GRAPHIC
C1EF AØ ØØ              LDY #$ØØ       ;VALUES
C1F1 51 BØ              EOR (SPLO),Y
C1F3 91 BØ              STA (SPLO),Y
C1F5 68                 PLA
C1F6 A8                 TAY
C1F7 6Ø                 RTS
                ;
                ; TABLE OF BIT VALUES TO SET IN A
                ; BYTE INDEXED BYT VALUE FOUND IN LINE
                ;
C1F8 8Ø 4Ø 2Ø  BITTAB   BYT $8Ø,$4Ø,$2Ø
C1FB 1Ø Ø8 Ø4           BYT $1Ø,$Ø8,$Ø4
C1FE Ø2 Ø1              BYT $Ø2,$Ø1
                ;
                ; LO BYTE VALUES SCREEN ADDRESSES
                ; TOP TO BOTTOM ASSUMING STARTING
                ; ON AN EVEN BOUNDARY
                ;
```

Line 170 Initial values of Radius, center X and Y.

Line 180-250 Draws the four sets of circles.

Line 260 Kills some time, changes background color and starts over again.

Line 280 If CX is > 255 then make low value -255 and sets hi X to 1.

Line 290 Poke the Center value of Circle to area for the machine code to use. Set the Radius and draw the circle.

Line 310 Resets the screen to normal LoRes mode and quits. GOTO 310 after a break to reset.

Line 320 Call screen clear routine.

Three parameter are necessary to draw the circle:
1) A Center X lo and Center X hi (0-320). CL and CH in Demo.
2) A Center Y lo value. (0-200). CY in Demo.
3) A radius (0-255). R in Demo.

The circle will wrap around on the X axis and will clip at Y greater than 200 or less than 0 on the Y axis. Funny things happen if the Y value exceeds a value or 200, so the routine will clip for you.

I have included the assembly language source for assembly buffs and for added explanation of the theory. All the routines with the exception of PLOTXY should be adaptable to any machine with HiRess capabilities.

CIRCLE is the master routine. It squares the Radius and saves it for the remaining computations, and plots the first four dots. At LOOP DY is incremented and checked if > = DX, if

not the next four points are computed and plotted. When the test passes, LOOP1 swaps DX and DY. The plot direction here is from vertical axis, right and left. When DX becomes = DY, the circle is complete and a return is made.

COMPXY does the adding and subtracting of DX and DY from the center point. After each quadrant is computed, the new X and Y values are set to on by calling the plotting routine.

COMLEG finds the unknown value DX using the Pythagorean formula, the Radius squared is computed in CIRCLE.

MULT8 is an 8 bit multiply routine. An 8 bit multiply was chosen due to speed, and anything over 255 would be out of range of most screen displays, since this would only be half of the total in the Circle.

SORT returns an 8 bit square root of the unknown leg of the right triangle. Final value is rounded towards the integer value the remainder is closest to.

PLOTXY is the machine dependent routine made to work on the Commodore 64's HiRes screen. Basically it uses the formula from the Programmer's Reference for setting a bit on the HiRes screen. Where it deviates is the final way it determines the byte on the screen. The mode of plotting the bit is determined from the value in The Globl MODE. The bit can be set with an OR, cleared with an AND or toggled with an XOR. The XOR will allow an object to be drawn on top of another and then erased, leaving the object underneath undisturbed. However, the XOR doesn't work very well on the circle, due to an occasional overlap of bits at the meeting point of the circle halves. Look over this routine as it can be used to plot a bit at X and Y from any kind of function (circle, line, rectangle, etc.).

CLEAR clears the HiRes screen and sets screen color to the value found at Address 02, poked here by the Basic Demo.

MICRO™

```
C200 00 40 80   COLTAB   BYT $0,$40,$80
C203 C0 00 40            BYT $C0,$0,$40
C206 80 C0 00            BYT $80,$C0,$0
C209 40 80 C0            BYT $40,$80,$C0
C20C 00 40 80            BYT $0,$40,$80
C20F C0 00 40            BYT $C0,$0,$40
C212 80 C0 00            BYT $80,$C0,$0
C215 40 80 C0            BYT $40,$80,$C0,$0
                ;
                ; HI BYTE VALUES
                ; TABLE ASSUMES HIRES STARTS ' $2000
                ;
C219 20 21 22   ROWTAB   BYT $20,$21,$22,$23,$25
C21E 26 27 28            BYT $26,$27,$28,$2A
C222 2B 2C 2D            BYT $2B,$2C,$2D,$2F
C226 30 31 32            BYT $30,$31,$32,$34
C22A 35 36 37            BYT $35,$36,$37,$39
C22E 3A 3B 3C            BYT $3A,$3B,$3C,$3E
                ;
C232 00         LINE     BYT 0          ;LO 3 BITS
                ;
                ;CLEAR : CLEAR HIRES SCREEN ' $2000
                ;
C233 A9 20      CLEAR    LDA #$20       ;NUMBER OF PAGES
C235 AA                  TAX            ;SET UP SCREEN
C236 85 B1               STA SPHI       ; ADDRESS
C238 A9 00               LDA #$00
C23A 85 B0               STA SPLO
C23C A0 00      CLR      LDY #$00
C23E 91 B0      CLR1     STA (SPLO),Y
C240 C8                  INY
C241 D0 FB               BNE CLR1
C243 E6 B1               INC SPHI
C245 CA                  DEX            ;DO 20 PAGES
C246 D0 F4               BNE CLR
C248 A5 02               LDA $02        ;VALUE POKED IN
                                        ; FROM BASIC
C24A 9D 00 04   COLOR    STA $0400,X    ;FIRST PAGE OF
C24D 9D 00 05            STA $0500,X    ; LO RES SCREEN
C250 9D 00 06            STA $0600,X
C253 9D 00 07            STA $0700,X
C256 CA                  DEX
C257 D0 F1               BNE COLOR
C259 60                  RTS
C25A                     END
```

```
100 REM — CIRCLE DEMO —
110 REM — CIRCLE ROUTINE RESIDENT —
120 REM — @ $C000
130 TS=828:CL=TS+8:CH=TS+9:RAD=TS+11:MODE=TS+12
140 V=53248:CY=TS+10:POKE 2,1
150 POKE V+17,59:POKE V+24,24:GOSUB 320
160 POKE MODE,1
170 R=40:CX=100:Y=100
180 FOR I=1 TO 12:C1=0
190 GOSUB 280:CX=CX+5:R=R-3:NEXT:C2=CX:R1=R
200 CX=CX+5:FOR I=1 TO 12:C1=0
210 GOSUB 280:CX=CX+5:R=R+3:NEXT
220 R=R1:CX=C2:FOR I=1 TO 12:C1=0
230 GOSUB 280:Y=Y-5:R=R+3:NEXT
240 Y=100:R=R1:CX=C2:FOR I=1 TO 12:C1=0
250 GOSUB 280:Y=Y+5:R=R+3:NEXT
260 GOSUB 330:A=A+1:IF A> 31 THEN A=1
270 POKE 2,A:GOSUB 320:GOTO 170
280 CS=CX:IF CX> 255 THEN CX=CX-255:C1=1
290 POKE CL,CX:POKE CH,C1:POKE CY,Y:POKE RAD,R:SYS 49152:
    CX=CS:RETURN
310 POKE V+17,27:POKE V+24,21:END
320 SYS 49715:RETURN
330 FOR T=1 TO 3000:NEXT T:RETURN
```

Graphicom and the Koalapad

by John Steiner

Chicago Rainbowfest

Over a year has gone by since the first Color Computer only show, Rainbowfest. Since that first show in Chicago, there have been several around the country, most have been too far away for me to attend. I am looking forward to traveling to Chicago again for the next Rainbowfest.

At the last show, I enjoyed meeting many of the people who have made the Color Computer one of the most expandable and usable computers on the market. Also, many people who have written powerful software were in attendance. This show should be no different; if you can attend, please look for me and say hello.

Graphicom and the Koalapad

This month, I must comment in more detail about one of the best graphic oriented programs I have seen for the Color Computer, Graphicom. Yes, Graphicom is fun for the kids to play with and also interesting, but don't dismiss it as another toy program. For example, I have two practical and useful applications. I use it to create logos and designs for my company products. In addition, I use it to draw and print schematic diagrams. There are many other applications that relate to graphics in a practical business and personal sense.

Drawing with Graphicom requires a single joystick and two fire buttons. One option, however, is to use a Koalapad, modified to fit the Color Computer. For those of you who may be unaware, the Koalapad is a small drawing tablet that plugs into the joystick port of several different types of computers. There are versions for the Apple, Atari, Commodore, IBM PC, and other personal computers, and it comes withth software that allows the use of this sophisticated digitizer.

Koala Industries, however, has not seen fit to make a version of the Koalapad for the CoCo. The enterprising people at Cheshire Cat Software (creators of Graphicom) have included modification instructions to enable the use of the Koalapad with their software. After following these instructions, I found the pad to be a useful tool for other joystick applications as well. Essentially, the pad is an unusual joystick. If nothing is being pressed on the face of the pad, the joystick port returns coordinates of 32,32 (the joystick is centered). If you use a finger or other object to press on the face of the pad, the joystick port reports the coordinates of the location of the pressure on the pad. Moving the finger, or the wood "pencil" that comes with the pad, will cause the joystick coordinates to change in relation to the new location. The result of all this is that the modified Koalapad can be used anywhere you can use a standard joystick.

This new application of a joystick intrigued me, and I have found other joystick software that can use the Koalapad to better advantage than a standard joystick. It occurred to me that other people might be interested in using the Koalapad for use with Graphicom, or for other purposes. I contacted Bob Rosen of Spectrum Projects, publisher of the Graphicom program, and he gave me permission to pass along the modification instructions to you.

The modification instructions are for the Atari version of the Koalapad. I don't know how much difference there is between versions, so you might be sure to get the Atari version. The pad retails for around $100.00, but I have seen them on sale for less than $80.00. In addition to the pad, you will need a six conductor cable, two 1 Megohm resistors, and one or two din plugs that fit the joystick port. A 9 to 12 volt supply is also required.

Figure one contains a circuit board layout of the pad. It is easy to interpret the drawing, once you take the screws out of the bottom of the pad. By the way, there is one screw underneath the label that is stuck to the bottom of the pad. Removing this screw will void your warranty on the pad, so you might want to have the store you purchased the pad from check the pad to make sure it is a working unit before you take it apart.

From the diagram in figure 1, the six wires are connected as follows:

Step 1 to pin 1 of the right joystick din plug.
Step 2 to pin 2 of the right joystick din plug.
Step 3 to pin 4 of the left joystick din plug. (See next paragraph).
Step 4 to pin 4 of the right joystick din plug.
Step 5 to pin 3 of the right joystick din plug and minus of the 8.3 volt supply.
Step 6 to positive of the 8.3 volt supply.

Figure 1

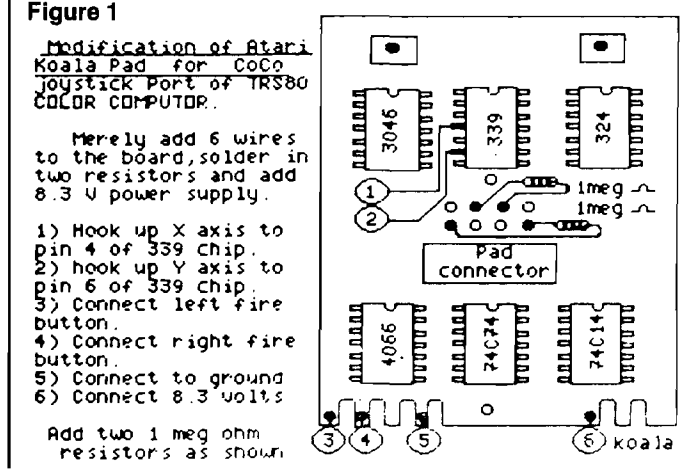
Modification of Atari Koala Pad for CoCo joystick Port of TRS80 COLOR COMPUTOR.
Merely add 6 wires to the board, solder in two resistors and add 8.3 V power supply.
1) Hook up X axis to pin 4 of 339 chip.
2) hook up Y axis to pin 6 of 339 Chip.
3) Connect left fire button.
4) Connect right fire button.
5) Connect to ground
6) Connect 8.3 volts
Add two 1 meg ohm resistors as shown
3046
339
324
1meg
1meg
Pad connector
4066
74C74
74C14
3
4
5
6
koala

The Koalapad has two "fire" buttons on the top of the pad. The right joystick and fire button connections are hooked to a single din plug. The left fire button is connected to the other din plug for use with Graphicom. I preferred to have only one fire button hooked up to the pad, thus allowing me to have a standard joystick, or remote footswitch in the left joystick port. With Graphicom, the left joystick is not used, only the left fire button. If you are using the tablet with other software, you may want the flexibility of having a joystick and Koalapad in either port at the same time.

Figure two is a schematic of a simple 8.3 volt regulator that is used to obtain power for the Koalapad. The manual states that the 8.3 volts there is quite critical, so they recommend regulating it. Because I was in a hurry to see how it worked, and had an old nine volt AC power supply sitting around (one of those that contain a small transformer that plugs into the wall, and a small cord that ran to a nine volt battery snap), I used it. I found that the load on the Koalapad pulled the 9 volt supply down to 8.45 volts. The pad seems to work fine. I would, however, follow their recommendations on regulating the supply, if you plan on heavy duty use of the pad.

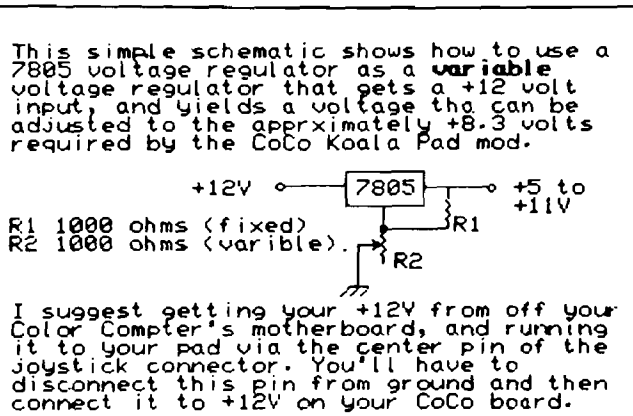
This simple schematic shows how to use a 7805 voltage regulator as a variable voltage regulator that gets a +12 volt input, and yields a voltage tha can be adjusted to the apprximately +8.3 volts required by the CoCo Koala Pad mod.
+12V
7805
+5 to +11V
R1
R2
R1 1000 ohms (fixed)
R2 1000 ohms (varible).
I suggest getting your +12V from off your Color Compter's motherboard, and running it to your pad via the center pin of the joystick connector. You'll have to disconnect this pin from ground and then connect it to +12V on your CoCo board.

Figure 2

Figures one and two were both created using Graphicom, by the people at Cheshire Cat Software, and are reprinted from page 32 of the Graphicom software manual by permission of Spectrum Projects. These two illustrations should give you an idea of the usefulness and power of the Graphicom software.

After these simple modifications, plug the pad into the right joystick port, and run the following test program.

```
10 CLS
20 A=JOYSTK(0):B=JOYSTK(1)
30 PRINT@224,A,B
40 GOTO 20
```

When you run the program, it should print 32 SPACES 32 on the screen, indicating the two values being read in from the right joystick port. Use the wood pencil to touch the very upper left hand corner of the pad. The numbers should change to 0,0. If you press on the lower right hand corner, it should return 63,63. Moving the stick on the pad should cause the numbers to change with respect to the position of the stick.

I have had a lot of fun with the pad, and pass this information along to those of you who like to experiment with hardware. The process is fairly simple. If you try the modification, and have any problems, you may give me a call in the evening at 701-281-0549. I will try to help. Have fun, and if you develop any software that uses the pad, let me know. The pad is a useful, and interesting accessory for the CoCo.

MICRO

microbes

A Note to Our Readers: In the last issue (Micro 72:26) we printed an article on a Better Random Number Generator. Due to problems with our typesetting equipment, when we transferred the text and program, all of the special symbols such as plus signs, equal signs, greater than, less than, etc. were missing. This was brought to our attention by the authors after the issue was already printed. To correct this problem, we are listing the appropriate changes for the text and reprinting the entire program (minus the hex listing, since it was correct). We are sorry for any inconvenience this may have caused and assure you that the problem has been rectified. Thanks.

In the text wherever R[I1], R[I2],..., R[IK], R[N1], etc. appear there should be a plus sign between the letters and numbers in the brackets — R[I+1], R[I+2], etc.

Page 28, 2nd para., should read R[I+1] = R[I] + 1

Page 29 , last para., should read (R[N]/m)

Page 31, under Combination of RNG's, 2nd para., should read RANDOM = XRAN (Y * 100)

Page 32, 1st para., should read RAN = USR(SELECT)

Page 32, 2nd column, 4th para., should read
(A+B) mod C = (A mod C + B mod C) mod C

```
    12345  OLDRAN
  X 11111  MULT
   -------
    12345
   2345
  345
 45
5
-----
 1371 65295  PROD
```

```
**********************
*                    *
*  A BETTER RANDOM NUMBER GENERATOR *
*          FOR APPLESOFT           *
*                    *
*          COPYRIGHT 1984          *
*        THE COMPUTERIST INC.      *
*        ALL RIGHTS RESERVED       *
*                    *
**********************
;
; TO USE THE RNG SUBROUTINE, YOU MUST
; SET UP THE USR FUNCTION.
; SEE EDITORIAL NOTE
;
;  LOAD IN PARAMETERS FOR THE RNG'S
;
; Z: RAN=(31415938565*OLD+24607)MOD20
;
 ZADD     BYT $00,$00,$00,$67,$27
 ZMULT    BYT $07,$50,$89,$2E,$05
 ZRAN     BYT $00,$00,$00,$00,$00
; Y: RAN=(8413453205*OLD+99991)MOD20
;
 YADD     BYT $00,$00,$01,$86,$97
 YMULT    BYT $01,$F5,$7B,$1B,$95
 YRAN     BYT $00,$00,$00,$00,$00
; X: RAN = (27182819621*OLD+3)MOD20
;
 XADD     BYT $00,$00,$00,$00,$03
 XMULT    BYT $06,$54,$38,$E9,$25
 XRAN     BYT $00,$00,$00,$00,$00
; ADD LOOKUP TO BASE LOCS FOR
; PARAMETER ADDRESSES FOR CURRENT RNG.
 LOOKUP   BYT $04,$13,$22      ; Z, Y, X
;
 XYORZ    BYT $00         ; WHICH GENERATOR
 YTEMP    BYT $00         ; Y-REG ON ENTRY
 XTEMP    BYT $00         ; X-REG ON ENTRY
 MULT     BYT $00,$00,$00,$00,$00
 OLDRAN   BYT $00,$00,$00,$00,$00
;
 RNG      PHP             ; SAVE EVERYTHING
          STX XTEMP
          STY YTEMP
          JSR SIGN        ; SEE EDITOR'S NOTE FOR
                          ; SIGN ROUTINE
                          ; FAC HOLDS S OF USR(S)
;                           PUT FF IN A IF S< 0,
;                           PUT 0 IF 0, 1 IF S> 0
          TAX             ; FROM THIS
          INX             ; DECIDE WHICH RNG
          LDY LOOKUP,X    ; VIA LOOKUP TABLE AND
          STY XYORZ       ; SAVE IT FOR LATER
;
; NOW THAT WE KNOW WHICH GENERATOR, MOVE
; ITS CONSTANTS TO THE TEMP LOCS.
;
          LDX #$04        ; LOOP TO TRANSFER
 TRNSFR   LDA ADDBAS,Y    ; RNG'S VALS TO
;                           STANDARD LOCS, I.E.
          STA NEWRAN,X    ; ADD CONST TO NEWRAN,
          LDA MULBAS,Y    ; MULT CONST
          STA MULT,X      ; TO MULT,
          LDA LSTBAS,Y    ; LAST RND VAL FROM
          STA OLDRAN,X    ; THIS RNG TO OLDRAN
          DEY
          DEX             ; 5 BYTES DONE
          BPL TRNSFR      ; IF NO, DO NEXT
;                           IF YES, MULTIPLY.
          LDX #$04        ; INDEX # OF BYTES
          STX BYTCNT      ; KEEP TRACK OF # BYTES
;                           DEALT WITH SO FAR
 NXTBYT   LDA MULT,X      ; LEAST SIGNIF BYTE
          STA MULTMP
          LDY #$07        ; COUNT # BITS
 MULPLY   LSR MULTMP      ; GET LEAST SIG BIT.
          BCC SHIFT       ; BIT=0 DON'T ADD.
          CLC             ; BIT SET, SO ADD
 ADD      LDA OLDRAN,X    ; OLDRAN TO NEWRAN.
          ADC NEWRAN,X
          STA NEWRAN,X
          DEX             ; ALL BYTES DONE
          BPL ADD         ; NO ADD NEXT
          CLC             ; YES, SO PREPARE TO
;                           SHIFT OLDRAN (IE
;                           MULT * 2). DROP LAST
;                           CARRY AS IT IS
;                           0 MOD20 ANYWAY.
 SHIFT    LDX BYTCNT      ; # BYTES TO SHIFT
 SHFTIT   ROL OLDRAN,X
          DEX             ; BYTE LEFT
          BPL SHFTIT      ; YES, SHIFT IT.
          LDX BYTCNT      ; RECOVER # BYTES.
          DEY             ; MORE BITS LEFT
;                           IN THIS BYTE
          BPL MULPLY      ; YES, MULT BY NEXT.
          DEC BYTCNT      ; NO, DONE A BYTE.
          LDX BYTCNT      ; ANY BYTES LEFT
          BPL NXTBYT      ; YES MULT BY IT.
;
          LDY XYORZ       ; DONE. PUT THE
          LDX #$04        ; NEW RND INTO THE
 MOVRAN   LDA NEWRAN,X    ; RESPECTIVE RNG'S
          STA LSTBAS,Y    ; LAST RAN STORAGE.
          DEY
          DEX             ; MORE TO MOVE
          BPL MOVRAN      ; YES, DO.
;
; DONE. NOW TO NORMALIZE FAC, ALIAS NEWRAN.
;
          LDY #$28        ; $28 (40) BITS IN FAC.
 NRMLIZ   LDA NEWRAN      ; FIND HIGHEST SET.
          ROL             ; # SIGNIFICANT =
;                           28 - # NOT SET
          BCS BITSET      ; LEAVE WHEN TOP BIT FOUND
          ROL NEWRAN+4    ; NOT FOUND YET, SO
          ROL NEWRAN+3    ; GET RID OF THE 0
          ROL NEWRAN+2    ; BIT AT THE TOP.
          ROL NEWRAN+1    ; Y WILL KEEP TRACK
          ROL NEWRAN      ; OF # OF BITS LEFT.
          DEY             ; ANY LEFT
          BNE NRMLIZ      ; YES, KEEP LOOKING
;                           NO, ALL DONE.
          DEY             ; PROTECT AGAINST
;                           DIVIDE BY 0.
 BITSET   LDA #$00        ; PUT 0 IN FAC'S
          STA NEWRAN+4    ; SIGN BYTE.
          TYA             ; GET # SIG BITS
          CLC             ; PUT IN FAC'S +$80
          ADC #$58        ; FORMAT: $58+$28=$80.
          STA RANEXP      ; PUT IN EXPONENT
;                           BYTE AND DONE.
          LDY YTEMP       ; SO, UNSAVE
          LDX XTEMP       ; EVERYTHING
          PLP             ; AND
          RTS             ; SAY GOODBYE.
          END
```

Name: **Printerface Intelligent Interface**
Hardware: Printers: Diablo Hytype I, Hytype II, DEC LQP-01, Xerox

Description: This unique printer interface board is installed in the printer rather than the computer, and upgrades an older printer to perform like the best Daisy Wheel printers. Model DT150 and DT151A intelligent interfaces snap into place without modifying the printer and provide all standard configurations, including RS232 serial, Centronics parallel, IEEE488, and Current loop.

Features include automatic bidirectional printing, microspace, proportional spacing, bold facing, auto centering, variable pitch, self test and debug modes. Accessories available include a 16K buffer memory and a front control panel for 16 functions.

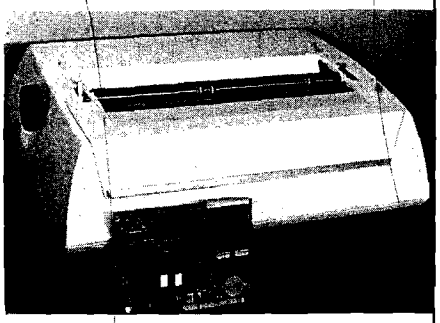

Price: $395.00
Contact: Kuzara International
7770 Vickers, Suite 105
San Diego, CA 92111
619/569-9107

Name: **MasterType**
Hardware: Apple, Atari, Commodore-64

Description: "Mastertype" is the best-selling educational software program, having sold over 150,000. It teaches typing and keyboard skills through an exciting arcade game format, and is now the first software program designed to teach Dvorak keyboard skills on the Apple IIc. The new version has been enhanced with HiRes graphics, scoring retention, and, in addition to the 18 lessons on the standard QWERTY keyboard, five lessons on the Dvorak keyboard.

The Dvorak keyboard increases speed and comfort because the most frequently used keys are placed on the "home row" beneath the typists strongest fingers. It is beginning to gain wide acceptence.

Price: $39.95
Contact: Scarborough Systems
25 North Boardway
Tarrytown, NY 10591
914/332-4545

Name: **B.I.-80 Column Adaptor**
System: Commodore-64

Description: A high-quality 80 column plug-in module that eliminates the problems of snow, fuzziness, hashing and interference. It gives optimum clarity, even with a full screen of characters, and can easily switch from 40 to 80 column display at any time.

B.I.-80 can be used with Commodore color monitors 1701 and 1703, or with any monochrome video monitor. It is self-initializing, with complete 80 column operating system and BASIC 4.0 language built in. Comes with one year warranty, and full documentation, including a description of the BASIC 4.0 language.

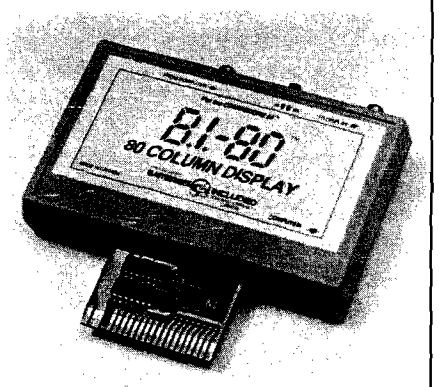

Price: $
Contact: Batteries Included
186 Queen Street West
Toronto, ON m5v 1z1
Canada
416/596-1405

Name: **Decisions**
System: Atari
Memory: 48K

Description: A new program that provides assistance on making a logical choice among several alternatives, for both home and business use. The program is flexible enough to analyze any multiple choice decision. Features such as fully prompted inputs, help screens, rapid re-analysis and thorough reference manual make it easy to use. Graphic output screens are easily interpreted and a hard copy record is provided to users with an 80-column printer.

The program uses logical analysis based on scientific principles. It is available either on 5 1/4" disk or cassette tape. Available at some dealers or by mail order.

Price: $37.50
Contact: Lateral Software
P.O. Box 605
Stanton, CA 90680
714/826-3970

Name: **Interface Adapter Board**
System: Commodore 64

Description: The 6522 VIA (Versatile Interface Adapter) input/output chip interface adpater board allows 6522 programming techniques, covered in many available books, to be applied to the C-64 for real-time control applications. It allows full use of the IRQ interrupt and, when combined with the C-64's memory capacity, provides a powerful development system and controller in one package. Extensive application notes and programming examples are included.

Each board includes two 6522s, with total of four 8-bit bidirectional I/O ports, eight handshake lines, four 16-bit timer/counters. Up to four Model 64IF22 boards can be connected, providing 16 8-bit ports.

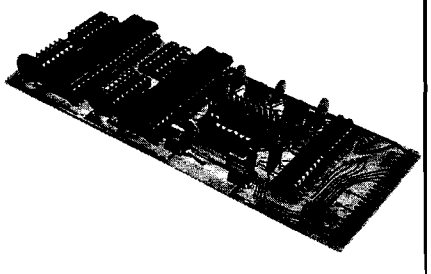

Price: $169.00 for first; $149 for each extra
Contact: Schnedler Systems
1501 N. Ivanhoe,
Dept. NR
Arlington, VA 22205
703/237-4796

Name: **Language Development Software**
System: Apple II/IIe (Atari coming soon)
Hardware: One disk drive

Description: Currently available languages in this product line include Spanish, French, German, Italian, Biblical Hebrew, Modern Hebrew and Arabic. In the near future, Latin, Russian, Polish, Swedish, and Classical Greek will also be available. All programs teach 1000 of the most common words in the target language. When words have more than one meaning, the program allows for these other meanings, along with English translation. A "Teach Yourself Book"is included in the package for additional information.

Each language program is menu-driven with sequential review, random review and quiz options. The software gives instant feedback, tests, and percentage of correctness through interactive learning.

Price: $56.95
Contact: Soflight Software
2223 Encinal Station
Sunnyvale, CA 94087
408/735-0871

Name: **Apple SourceLink**
System: Apple II, IIe, II Plus
Memory: Minimum 48K

Description: Communications software designed to supplement the use of The Source by personal computer owners. It is compatible with the new Apple modem, as well as the Hayes and Transend modem products. The software includes automatic dial-up and sign-on procedure for Telenet, Uninet and Sourcenet networks, simultaneous capture of data from The Source into the Apple memory or disks, including a capture editor and simplified transfer of data from disks to The Source. An additional feature allows Apple and IBM users to automatically access any number of pre-determined services and databases once online.

Contact: The Source
1616 Anderson Road
McLean VA 22102
703/734-7500

Name: **ScreenShooter**
Hardware: CRT

Description: A simple way to take photos and slides of a computer CRT using Polaroid 600 High Speed color film, Polachrome 35mm instant slide film, or conventional 35mm color or black and white films. The outfit includes a Polaroid One Step 600 Camera, CRT hood, CRT hood adapter, diopter lens and 35mm SLR camera bracket.

When using the Polaroid One Step, camera exposure is automatic. You place the Screenshooter against the computer screen, view the image through the camera and click away. When using a 35mm SLR camera, the camera's built-in metering system is used to find the exposure. Screenshooter comes with a lifetime warranty (the camera has a one year warranty).

Price: $169.00
Contact: NPC Photo Division
1238 Chestnut Street
Newton, MA 02164
617/969-4522

Name: **Bug Off!**
System: Apple II or IIe
Memory: 64K
Language: Pascal 1.1 or 1.2

Description: A powerful tool that saves time in testing and debugging Apple II Pascal programs. The easily installed package runs at near-execution speed and is totally interactive. The command screen gives you complete control and lets you build and use your own macros. Stored debugging commands let you start where you left off and you can insert breakpoints wherever you want them.

This package comes with a guarantee of total refund if you are not satisfied and return it within 30 days of shipment.

Price: $49.96
Contact: First Byte
2845 Temple Avenue
LongBeach, CA 90806
213/595-7006

Name: **Fit and Trim**
System: Apple II/IIe
Memory: 64K RAM
Hardware: 1-2 disk drives, printer optional

Description: This educational and counseling program for weight control features two units. The first Educational unit provides general information on eating and activity changes needed for weight loss, suggesting goals for aerobic, muscle building and other activities. The Counseling unit has Weight Review (projections, current weight and change progress displays), Eating Review (analysis of food you eat, showing calories and problem foods with recommended changes), and Exercise Review (analysis of activities with weekly exercise suggestions).

Five week histories can be summarized and recommendations for weight change can be printed. Capacity is 80 individuals per diskette. The program can be copied and is modifiable.

Price: $39.95
Contact: Andent, Inc
1000 North Avenue
Waukegan, IL 60085
312/223-5077

Name: **SpellPack**
System: Commodore-64

Description: This powerful program teaches your C-64 to spell and checks an entire document in 2-4 minutes. It contains a dictionary of over 20,000 of the most commonly used English words, and allows you to expand this by 5,000 specialized terms.

Each word is compared to the dictionary and those not found are highlighted in context, right on the screen. If the word is misspelled, it can be edited and instantly added to the dictionary. If it is correct but not listed, it can also be added immediately. It accelerates the page rate of checking so that a one page document may take two minutes to check, but a five pager may only take three minutes. Additions and corrections are made with single key command. SpellPack works with most major word processing programs.

Price: $
Contact: Batteries Included
186 Queen Street West
Toronto, ON m5v 1z1
Canada
416/596-1405

Name: **4 in 1**
System: Apple

Description: An enhanced database management system that simplifies record-keeping at home or business by handling four separate functions: word processing, list and label making, calculations and data management.

Major data processing operations are combined in a single program so there is no need to change disks mid-project. For example, 4 in 1 can perform calculations on defined fields, then merge those fields plus the results into forms or letters created with the word processor. Current tab stops and margin settings are indicated onscreen, as are menu options, prompt messages and system operating messages.

Price: $129.95
Contact: Softsmith Corp.
1431 Doolittle Drive
San Leandro, CA 94577
415/487-5900

Name: **Digital TLC-1**
Hardware: Any RS232 devices

Description: This is a three port active switch that lets any two RS232 devices share a third and also communicate with each other. Any transmission format at any rate up to 19,200 baud can be accommodated and all connections are made via a six button control panel with out switching transients.

Proper connection between the transmitted and received data pins is fully resolved with the TLC-1 for any combination of Data Communication Equipment and Data Terminal Equipment. Permitting 64 possible connection combinations, all data paths are monitored by six LEDs.

Price: $245
Contact: Digital Laboratories, Inc.
600 Pleasant St.
Watertown, MA 02172
617/924-1680

Name: **Intec 300 Modem**
System: Apple II/IIPlus/IIe, TRS80 Model 3/4, IBM PC

Description: A new auto dial/auto answer modem featuring software and essential phone-computer interface connections to function with several computers. Also provided is easy to follow, detailed documentation.

Features include data capture direct to disk file as well as memory buffer, 255 number auto-dialing telephone directory with auto redial of last phone number, non-ASCII file transfer, optional add/delete of linefeeds, transmission of true break signal, and many more.

Price: $189.00
Contact: Intec Corp.
West Bloomfield, MI

Title: **The RS-232 Solution**
Author: Joe Campbell
Price: $16.95
Publisher: Sybex Computer Books

The problem of interfacing your computer with any RS-232-C peripheral is covered in this book. Using tools that total less than $15.00, the reader is instructed how to measure logic levels and conduct other tests. The results of these tests are then taken to derive a specification for a cable, thus making the correct connections. There are ample diagrams and illustrations explaining the basics and beyond, of serial interfacing. The author's 'fool-proof' method is illustrated with real case studies. Case studies include SB80/ADDS, N*/OKI, KayPro/Epson, Osb/TnT, and IBM/NEC. In addition to printers, the interfacing of modems, terminals, and plotters is also explained.

Title: **The Elements of Friendly Software Design**
Author: Paul Heckel
Price: $8.95
Publisher: Warner Books

Taking the approach that software is a communication craft, the author draws upon a variety of innovators in this area. Citing such greats as Walt Disney, George Orwell and Leonardo Da Vinci, the idea of visuality and clear communication in software is emphasized. All of the elements of friendly software design are covered from the perspective of both the user and designer. Attention is given to what the user expects, perceives, feels and thinks; all lending to a better understanding and foundation from which to design software. Prototypes and innovations are examined. Points are supported with a variety of pictures, illustrations, etc. Thirty principles of software design are given in addition to seven traps that catch experienced designers.

Title: **The BBC Microcomputer for Beginners**
Authors: Seamus Dunn & Valerie Morgan
Price: $13.95
Publisher: Prentice/Hall International

This book covers the in's and out's of the BBC Microcomputer, more popularly known as the Acorn; both models, A and B, are covered. In addition to noting the various characteristics and options available on the BBC microcomputer, programming in BASIC is also covered. In this vain, the book guides the reader in a learning by doing process. Carefully sequenced programs take the user through a variety of programming 'musts', including: conditionals, loops, file management, functions, strings, formatting, graphics, color, and sound. The approach is that of structured programming. The marriage of programming skills and knowledge of the machine are integral to the book as a whole. There are examples and sample programs to aid the reader in learning both the BBC microcomputer and structured programming using BASIC. At the end of each chapter are problems, happily at the back of the book answers are also provided.

Title: **Microprogrammers Market 1984**
Author: Marshall Hamilton
Price: $13.50
Publisher: Tab Books

Basically a sourcebook for programmers looking to sell their program ideas, this listing covers hundreds of companies. The information provided on each publisher includes: Company name, address, telephone number, president, submission contact, microcomputer systems covered, age of the company, company's publishing track record, what they are looking for, payment methods, how and when submissions should be handled, response time, current program sources, what types of programs are now being sold and how they are marketed. In addition the author provides a number of valuable tips on writing, submitting and selling. Listings are broken down into Business/Industry, Educational/Tutorial, Games, Home Use, and Utilities.

Title: **How to Make Love to A Computer**
Author: Dr. Maurice K. Byte
Price: $3.95
Publisher: Pocket Books

For those who are really into their computer this book is a must. Learn the heretofore unspoken secrets of how to make love to your computer. Every aspect is touched upon in this Kama Sutra of computer love making. From the first meeting to that special night together, all of the in's and out's of computer romance are examined. Sexual fears, tips from pros, computerotica, and the joy of programming are a few of the many areas this book covers. Complete with photographs, this is not a book for children.

Title: **The Illustrated dBase II Book**
Author: Russell A. Stultz
Price: $16.95
Publisher: Spectrum Books

A reference/tutorial for the popular dBase II software program by Ashton-Tate. The author uses modules to teach the reader how to use dBase II. With the aid of examples and illustrations the beginning programmer is guided through the world of database management. Descriptions of dBase II files, how they are stored, displayed, printed and edited are included. The experienced programmer will find that this can be used as a handy reference; educators will also find the concise text helpful. The modules are alphabetically organized, with a good index offering further reference support. All the reader needs is dBase II, and 8- or 16-bit microcomputer with at least 64K RAM, a disk drive, and a printer.

MICRO Program Listing Conventions

Commodore

LISTING C64 KEYBOARD

Commands

{CLEAR}	^ CLR
{HOME}	HOME
{INSERT}	^ INST
{DOWN}	CRSR DOWN
{UP}	^ CRSR UP
{RIGHT}	CRSR RIGHT
{LEFT}	^ CRSR LEFT

Colors

{BLACK}	CTRL 1 BLK
{WHITE}	CTRL 2 WHT
{RED}	CTRL 3 RED
{CYN}	CTRL 4 CYN
{PURPLE}	CTRL 5 PUR
{GREEN}	CTRL 6 GRN
{BLUE}	CTRL 7 BLU
{YELLOW}	CTRL 8 YEL
{RVS}	CTRL 9 RVS ON
{RVSOFF}	CTRL 0 RVS OFF

{ORANGE}	= 1
{BROWN}	= 2
{GREY 1}	= 3
{GREY 1}	= 4
{GREY 2}	= 5
{LT GREEN}	= 6
{LT BLUE}	= 7
{GREY 3}	= 8

Functions

{F1}	f1
{F2}	^ f2
{F3}	f3
{F4}	^ f4
{F5}	f5
{F6}	^ f6
{F7}	f7
{F8}	^ f8

Special Characters

{PI}	π ^ Pi Char
{POUND}	£ Pound Sign
{UP ARROW}	↑ Up Arrow
{BACK ARROW}	← Back Arrow

Atari

Conventions used in ATARI Listings.

Normal Alphanumeric appear as UPPER CASE:
SAMPLE
Reversed Alphanumeric appear as lower case:
yES (y is reversed)
Special Control Characters in quotes appear as:
{command} as follows:

Listing	Command	ATARI Keys
{UP}	Cursor Up	ESC/CTRL -
{DOWN}	Cursor Down	ESC/CTRL =
{LEFT}	Cursor Left	ESC/CTRL +
{RIGHT}	Cursor Right	ESC/CTRL *
{CLEAR}	Clear Screen	ESC/CLEAR
{BACK}	Back Space	ESC/BACK S
{TAB}	Cursor to Tab	ESC/TAB
{DELETE LINE}	Delete Line	ESC/SHIFT DELETE
{INSERT LINE}	Insert Line	ESC/SHIFT INSERT
{CLEAR TAB}	Clear Tab Stop	ESC/CTRL TAB
{SET TAB}	Set Tab Stop	ESC/SHIFT TAB
{BEEP}	Beep Speaker	ESC/CTRL 2
{DELETE}	Delete Char.	ESC/CTRL BACK S
{INSERT}	Insert Char.	ESC/CTRL INSERT
{CTRL A}	Graphic Char. where A is any Graphic Letter Key	CTRL A

Non-Keyboard Commands

{DIS=}	CHR$(8)
{ENB=}	CHR$(9)
{LOWER CASE}	CHR$(14)
{UPPER CASE}	CHR$(142)
{^RETURN}	CHR$(142)
{DEL}	CHR$(20)
{SPACE}	CHR$(160)

Notes:

1. ^ represents SHIFT KEY
2. = represents Commodore key in lower left corner of keyboard
3. CTRL represents CTRL key
4. Graphics characters represented in Listing by keystrokes required to generate the character
5. A number directly after a {SYMBOL} indicates multiples of the SYMBOL: {DOWN6} would mean DOWN 6 times

Advertiser's Index

Andent, Inc. 77
Batteries Included 75,77
Computer Mail Order ..... Ins Frt Cvr,1
Computerose ..... Ins Back Cvr
Digital Laboratories 77
F. Ashton 18
First Byte 76
Indus-Tool 9
Intec Corp. 77
Kuzara International 75
Lateral Software 75
MICRO Magazine ..... 64,67,Ins Back Cvr
NPC Photo Division 76
Protecto 39,40,41
Safeware 14
Scarborough Systems 75
Schnedler Systems 7,76
Soflight Software 76
Softsmith Corp. 77
Specialty Electronics 9
The Source 76
Totl Software 31
Transactor 3

MICRO

More Fun Than The French Foreign Legion

Join the elite corps of authors—Join MICRO!

We are looking for a few good writers who have what it takes:

- a technical understanding of computers
- innovative techniques and programs
- good writing skills
- a desire to participate in an exciting and growing field
- the ability to take old ideas beyond themselves
- the willingness to contribute and make a difference.

Don't wait--send for your Writer's Guide today.

Send a S.A.S.E. to:

Mike Rowe
MICRO INK
P.O. Box 6502
Chelmsford, MA 01824

Next Month In MICRO

Features

The UCSD P-System — This is a more powerful operating system than MS-DOS and the 8088, and, on a 68000 machine, a very fast one, too. Reviews of six 68000 machines are included.

Constructing 3-D Mazes — The program actually gives you rat's-eye views of the maze corridors — and all in 3 1/2K of RAM.

Graphics Print for C64 — The third part of this series adds a program that loads graphic files from a number of popular graphic programs, displays them and dumps them to a printer.

Atari/Epson Character Printing — The Atari puts a tremendous variety of graphic characters on screen; this program allows even custom characters to be put on paper.

Hilister — The second of a two-part series, this covers moving around within a program listing.

Alter T & S — Dump, in hex, any sector on a diskette with Commodore format and then modify any byte in that sector without the loss of other data.

Plus More...

Departments

Reviews in Brief
Spotlight
Software/Hardware Catalogs
New Publications
Interface Clinic
Lyte Bytes

What's Where in the APPLE

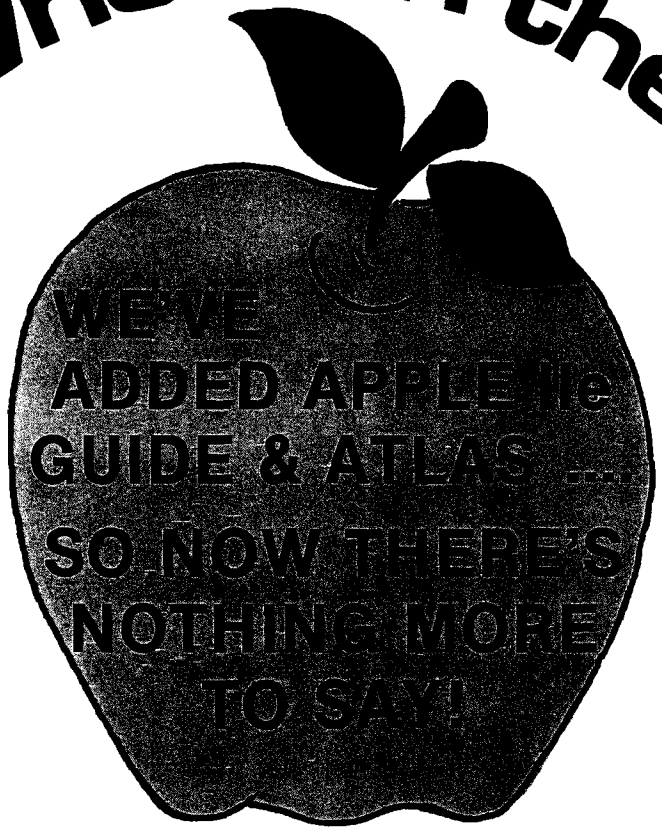

This famous book now contains the most comprehensive description of firmware and hardware ever published for *the whole Apple II family*. A new section with guide, atlas and gazeteer now provides Apple IIe specific information.

- Gives names and locations of various **Monitor, DOS, Integer BASIC** and **Applesoft** routines and tells what they're used for
- Lists **Peeks, Pokes** and **Calls** in over 2000 memory locations
- Allows easy movement between BASIC and Machine Language
- Explains how to use the information for easier, better, faster software writing

This expanded edition is available at the new low price of only $19.95

For the 35,000 people who already own previous editions, the IIe Appendix is available separately for just $5.00.

Please send me:

_____ What's Where in the Apple @ $19.95 ea. _____
(Plus $2.00 per copy shipping/handling)

_____ Apple *IIe* Appendix @ $5.00 ea. _____
(includes shipping charges)

Mass residents add 5% sales tax $ _____

Total Enclosed $ _____

Name _____

Address _____

City _____ State _____ Zip _____

Signature _____

☐ Check ☐ VISA ☐ MasterCard

Acct # _____ Expires _____

For faster service
Phone 617/256-3649

MICRO, P.O. Box 6502, Chelmsford, MA 01824

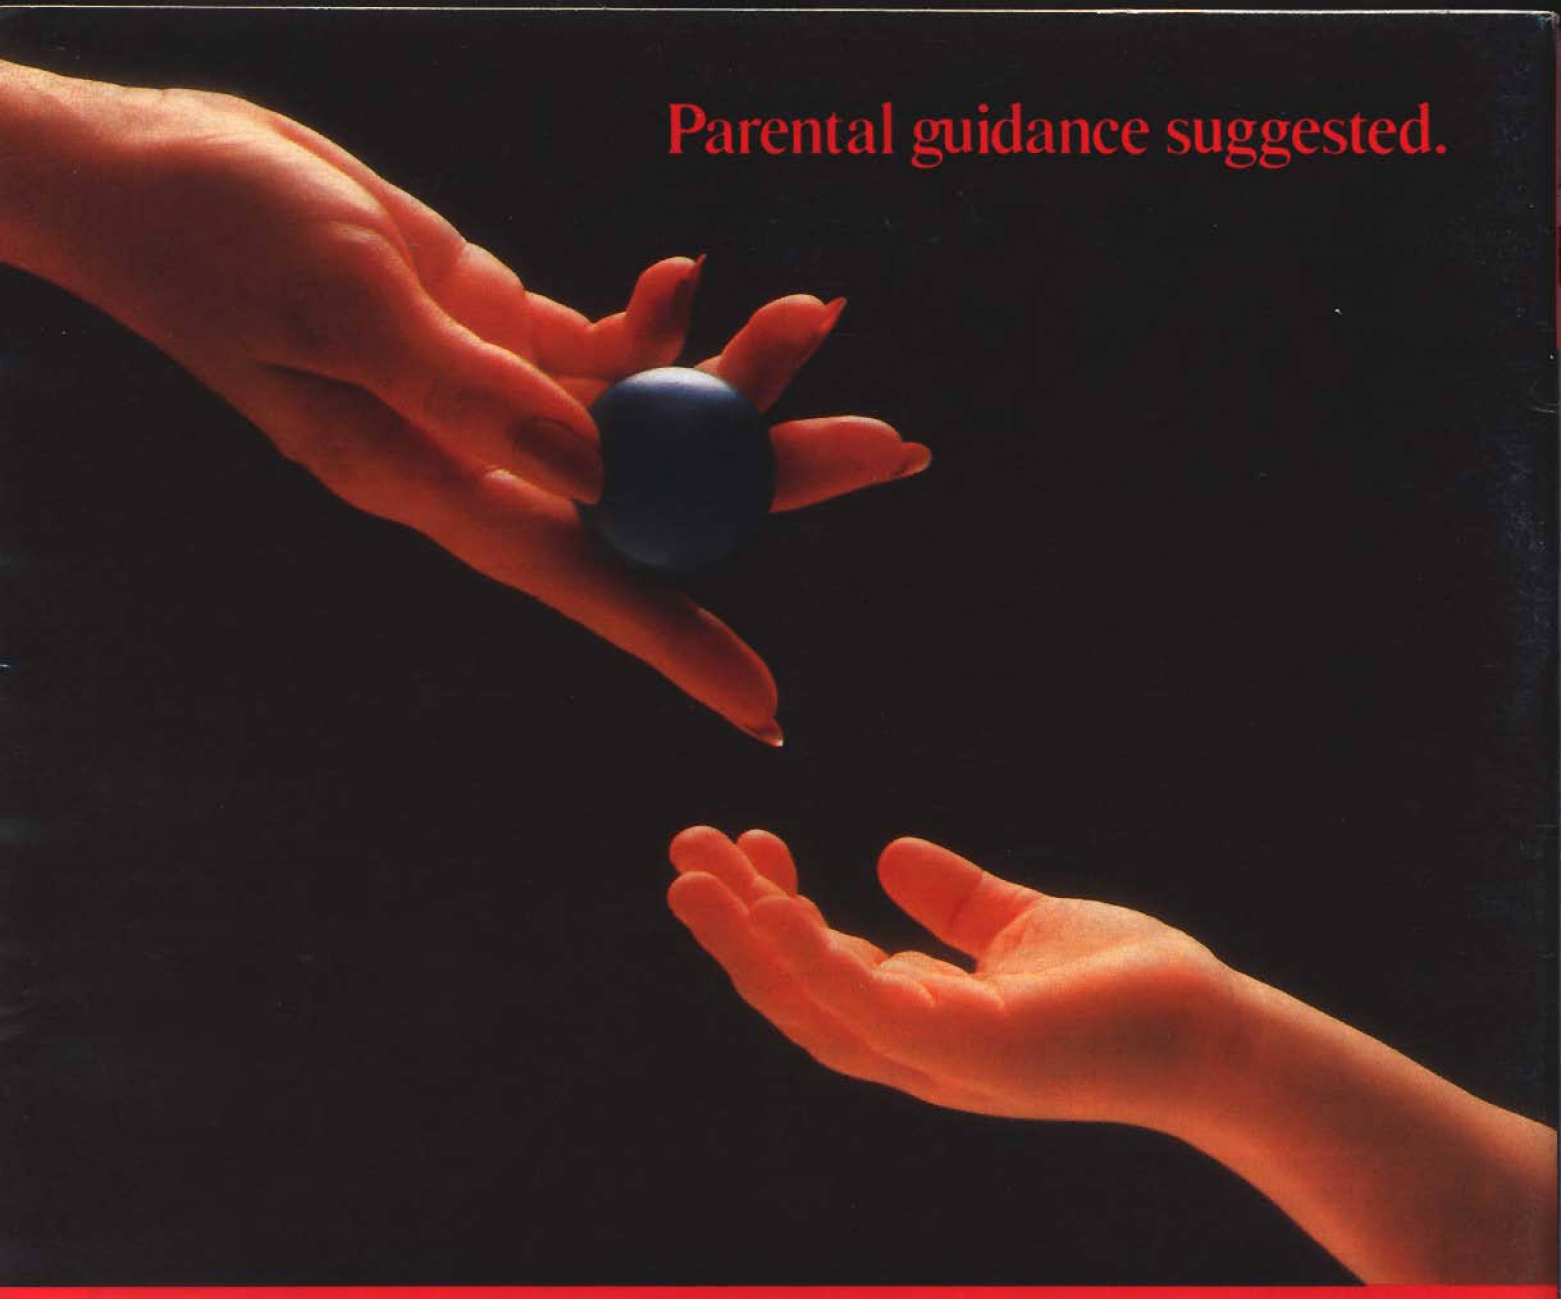

Take an active role in your child's development.

Parenting. The most important and rewarding endeavor you'll ever undertake. Gaze into your child's eyes. They're capturing all the wonders of the world around him, and looking to you for guidance.

Now you can gain a unique insight into your child's world with Childpace™ — an amazing new Child Development Program for ages 3 to 60 months.

Share the precious firsts.

When will your baby dazzle you with his first spontaneous smile? Stand alone? Take that first wobbly step?

The first five years are filled with continual growth and change. And questions. So even if your child's a toddler, you're still looking for answers. When will he start dressing himself? When should those random scribbles turn into distinctive shapes?

Compare apples-to-apples.

Childpace lets you evaluate your child's dexterity, language and social skills in the privacy of your own home. You enter information into Childpace, then he attempts tasks that are appropriate for his age group.

Childpace assesses his skill level based on extensive research, not the biased opinions of friends or relatives. Childpace uses your child's chronological (actual) age.

Grow with your child.

As your child grows, the tasks change to match his newly acquired skills. So Childpace is just as valuable for a 48-month old child as for an infant. Childpace can even evaluate up to 16 different children, and keep permanent records on each of them. Snapshots record your child's physical growth, but Childpace documents his or her actual development.

Track your child's progress, and help him develop specific skills. Childpace also contains warning signals to alert you to potential developmental problems at an early age, before they hold your child back. An ounce of prevention pays off.

Childpace. A fascinating glimpse into the world of child development. And more importantly, into *your child's* world.

Look for Childpace at your local computer hardware or software store. If unable to find it, send $39.95 to Computerose, Inc. Please allow two weeks for processing. 30 day money back guarantee.

$39.95 suggested retail price

Childpace is available for the Commodore 64,® IBM PC,® IBM PC Jr.,® Atari 800,® Apple II,® and Radio Shack Color Computer.®*

*Each is a registered trademark of the respective manufacturer.

Computerose™
We're programming for life.

2012 East Randol Mill Road Suite 223
Arlington, TX 76011 (817) 277-9153

© 1984 Computerose, Inc.